

**GENERAL
INSTRUMENT**


**VDE APPROVED
NON-ZERO-CROSSING TRIACS**



30 mA MCP3020/OZ*
NON-ZERO-CROSSING 15 mA MCP3021/1Z
10 mA MCP3022/2Z

Optocouplers

PACKAGE DIMENSIONS

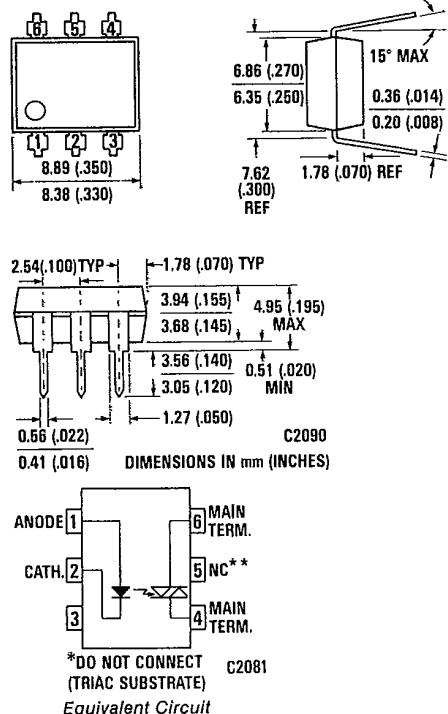

DESCRIPTION

The MCP3020, MCP3021 and MCP3022 are optically isolated triac driver devices. These devices contain a GaAs infrared emitting diode and a light activated silicon bilateral switch, which functions like a triac. This series is designed for interfacing between electronic controls and power triacs to control resistive and inductive loads for 240 VAC operations.

FEATURES

- Minimum commutating dv/dt is specified at 0.1 V/ μ sec
- Excellent I_{FT} stability—IR emitting diode has low degradation
- Pin for pin replacement for the MOC3020, MOC3021 and MOC3022
- High isolation voltage—minimum 7500 VAC peak
- Underwriters Laboratory (UL) recognized—File #E50151

APPLICATIONS

- European applications for 240 VAC
- Triac driver
- Industrial controls
- Traffic lights
- Vending machines
- Motor control
- Solid state relay

*Not Recommended
For New Designs

ABSOLUTE MAXIMUM RATINGS

TOTAL PACKAGE

Storage temperature	-55°C to 150°C
Operating temperature	-40°C to 100°C
Lead temperature (Soldering, 10 sec)	260°C
Total package power dissipation @ 25°C (LED plus detector)	330 mW
Derate linearly from 25°C	4.0 mW/°C
Surge Isolation voltage	7500 VAC Peak

INPUT DIODE

Forward DC current	60 mA
Reverse voltage	3 V
Peak forward current (1 μ s pulse, 300 pps)	3.0 A
Power dissipation 25°C ambient	100 mW
Derate linearly from 25°C	1.33 mW/°C

OUTPUT DRIVER

Off-State Output Terminal Voltage	400 Volts
On-State RMS Current $T_A = 25^\circ\text{C}$	100 mA
$T_A = 70^\circ\text{C}$	50 mA
Peak Nonrepetitive Surge Current	1.2 A
(PW = 10 ms, DC = 10%)	
Total Power Dissipation @ $T_A = 25^\circ\text{C}$	300 mW
Derate above 25°C	4.0 mW/°C

GENL INSTR, OPTOELEK

88 DE 3890128 0002946 8

MCP3020/0Z MCP3021/1Z MCP3022/2Z

3890128 GENL INSTR, OPTOELEK

88D 02946

DT-41-87

ELECTRO-OPTICAL CHARACTERISTICS (25°C Temperature Unless Otherwise Specified)

	TRANSFER CHARACTERISTICS						
	CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
DC	LED Trigger Current (Current Required to latch output)	I _{FT}	—	15	30	mA	Main terminal voltage = 3.0 V
	MCP3020 MCP3021 MCP3022		—	8	15		
dv/dt RATING	Holding Current	I _H	—	200	—	μA	Either direction
	Critical Rate of Rise of Off-State Voltage	dv/dt	—	15	—	V/μs	Static dv/dt, T _A = 85°C (see Figure 4)
ISOLATION	Critical Rate of Rise of Commutating Voltage	dv/dt	0.1	0.2	—	V/μs	Commutating dv/dt I _{LOAD} = 15 mA (see Figure 5)
	Isolation Voltage	V _{ISO}	5300			V _{AC} RMS	Relative humidity < 50%, I _{I-O} < 10 μA, 5 seconds
		V _{ISO}	7500			V _{AC} PEAK	Relative humidity < 50%, I _{I-O} < 10 μA, 5 seconds
	Isolation resistance	R _{ISO}	10 ¹¹			ohms	V _{I-O} = 500 VDC
	Isolation capacitance	C _{ISO}		0.5		pF	f = 1 MHz

	INDIVIDUAL COMPONENT CHARACTERISTICS						
	CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
INPUT DIODE	Forward voltage	V _F		1.3	1.50	V	I _F = 30 mA
	Forward voltage temp. coefficient			-1.8		mV/°C	
	Reverse breakdown voltage	BV _R	3.0	25		V	I _R = 10 μA
	Junction capacitance	C _J		50		pF	V _F = 0 V, f = 1 MHz
OUTPUT DETECTOR				65		pF	V _F = 1 V, f = 1 MHz
	Reverse leakage current	I _R	.35	10		μA	V _R = 3.0 V
	Peak Blocking Current, Either Direction	I _{DRM}	—	10	100	nA	V _{DRM} = 400 V, Note 1
	Peak On-State Voltage, Either Direction	V _{TM}	—	2.0	3.0	Volts	I _{TM} = 100 mA Peak

Note 1. Test voltage must be applied within dv/dt rating.

GENL INSTR, OPTOELEK

88 DE 3890128 0002947 0

— 3890128 GENL INSTR, OPTOELEK MCP3020/0Z MCP3021/1Z MCP3022/2Z
88D 02947 D7-41-87

TYPICAL ELECTRICAL CHARACTERISTIC CURVES (25°C Free Air Temperature Unless Otherwise Specified)

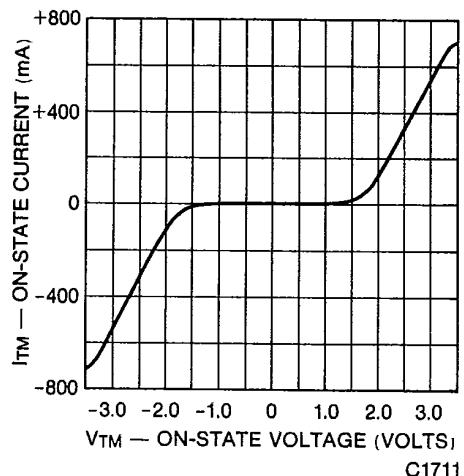


Fig. 1 On-State Characteristics

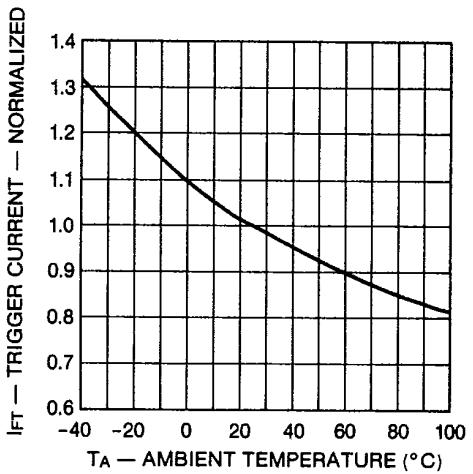
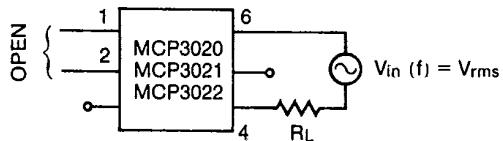
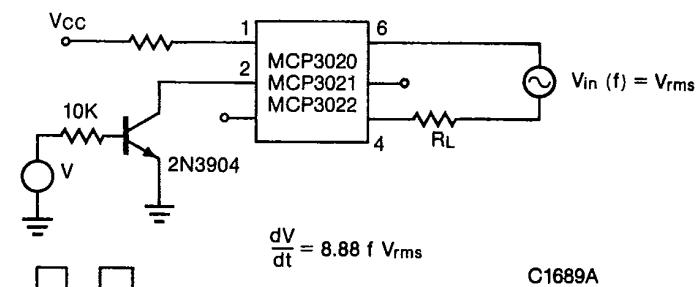


Fig. 2 Trigger Current vs. Temperature

TEST CIRCUITS FOR dV/dt MEASUREMENTS

$$\frac{dV}{dt} = wV_{pack} = 2\pi f \times 1.414 V_{rms} \\ = 8.88 f V_{rms}$$

Fig. 3. Static dV/dt Fig. 4. Commutating dV/dt