


# SuperSoft™ Recovery Rectifiers

## SSUR31

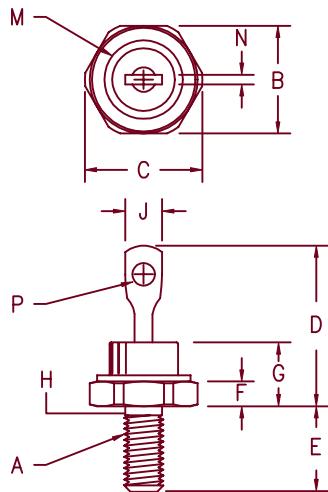

Notes:

1. 10-32 UNF3A threads
2. Full threads within 2 1/2 threads Standard Polarity:  
Stud is Cathode  
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.91	4.44	
G	---	.405	---	10.29	
H	.163	.189	4.15	4.80	2
J	.100	.310	2.54	7.87	
M	---	.350	---	8.89	Dia.
N	.020	.065	.510	1.65	
P	.070	.100	1.78	2.54	Dia.

D0203AA (D04)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage
SSUR3140*	400V	400V
SSUR3160*	600V	600V

\*Add Suffix R For Reverse Polarity

- Soft Recovery Ultra Fast Rectifier
- 175°C Junction Temperature
- $V_{RRM}$  400 to 600V
- High Reliability
- 30 Amps current rating
- $t_{RR}$  65 nsec maximum
- Low Forward Voltage
- Low Loss/Low Noise

### Electrical Characteristics

Average forward current  
Maximum surge current  
Max peak forward voltage  
Max reverse recovery time  
Max peak reverse current  
Max peak reverse current  
Typical Junction Capacitance

$I_{F(AV)}$  30A  
 $I_{FSM}$  350A  
 $V_{FM}$  1.60V  
 $t_{RR}$  65 ns  
 $I_{RM}$  1.0 mA  
 $I_{RM}$  15  $\mu$ A  
 $C_J$  115 pF

$T_C = 110^\circ\text{C}$ , Square wave,  $R_{\theta JC} = 1.35^\circ\text{C}/\text{W}$   
8.3 ms, half sine,  $T_J = 175^\circ\text{C}$   
 $I_{FM} = 30\text{A}$ :  $T_J = 25^\circ\text{C}$ \*  
 $I_F = 1\text{A}$ ,  $V_R = 30\text{V}$ ,  $dI/dt = -50\text{A}/\mu\text{sec}$   
 $V_{RRM}$ ,  $T_J = 125^\circ\text{C}$   
 $V_{RRM}$ ,  $T_J = 25^\circ\text{C}$   
 $V_R = 10\text{V}$ ,  $f = 1\text{MHz}$ ,  $T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-65°C to 175°C
Operating junction temp range	$T_J$	-65°C to 175°C
Max thermal resistance	$R_{\theta JC}$	1.35°C/W Junction to Case
Typical thermal resistance	$R_{\theta JC}$	1.15°C/W Junction to Case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.4°C/W Case to sink
Mounting torque		12–15 inch pounds
Weight		0.2 ounces (6.0 grams) typical

# SSUR 31

Figure 1  
Typical Forward Characteristics

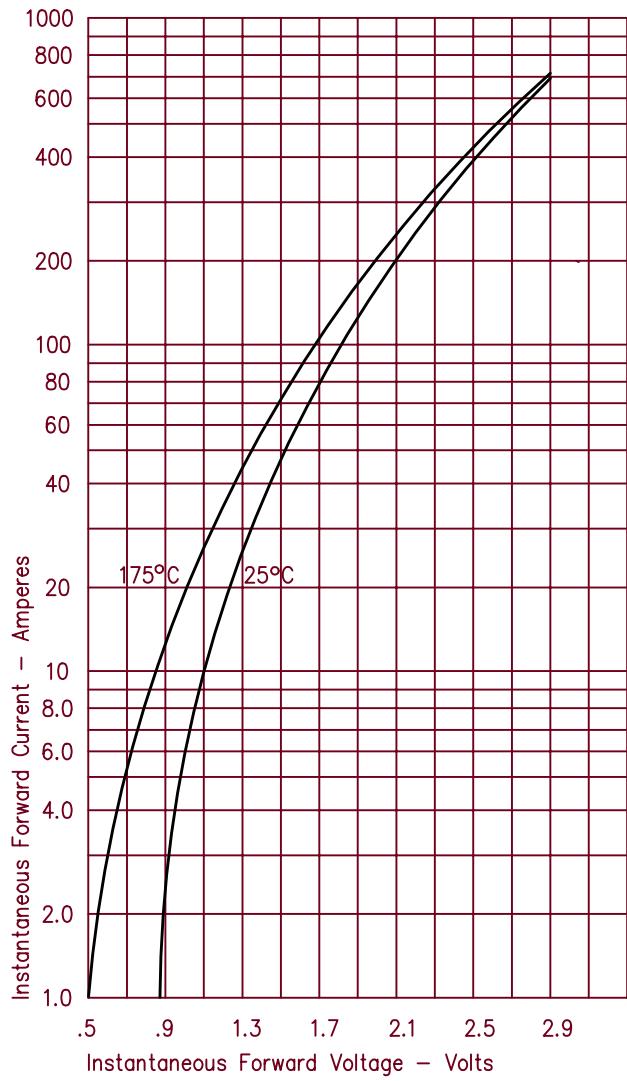


Figure 3  
Typical Junction Capacitance

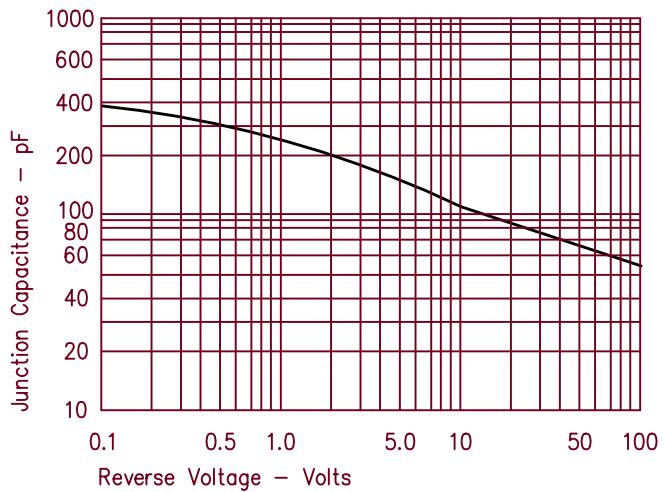


Figure 4  
Forward Current Derating

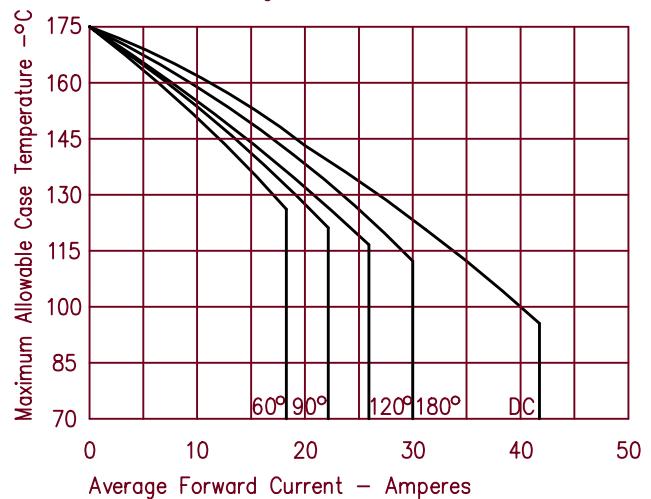


Figure 2  
Typical Reverse Characteristics

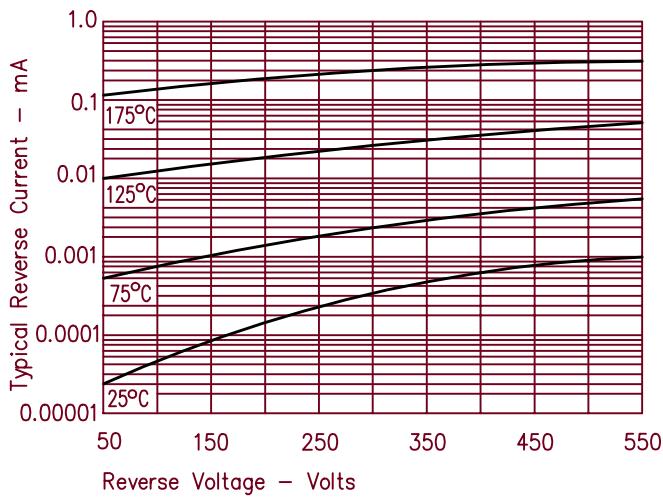


Figure 5  
Maximum Forward Power Dissipation

