

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



Material

- Terminal body
(contact pin): Brass(CuZn) Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)



Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:   

RoHS Compliant

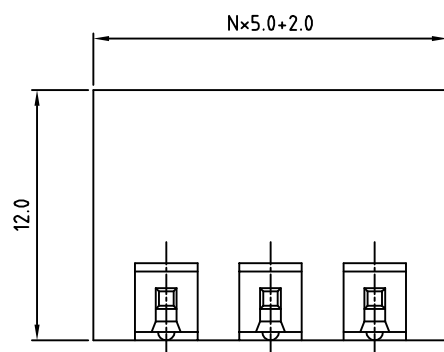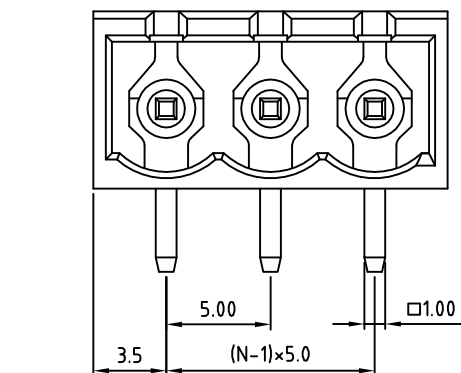

N = Number of contacts

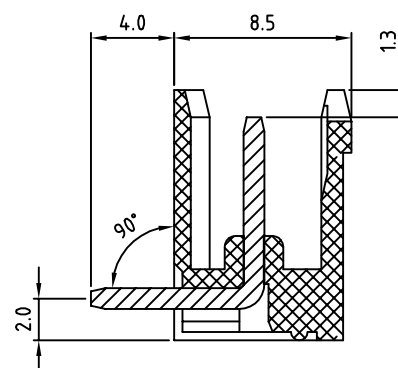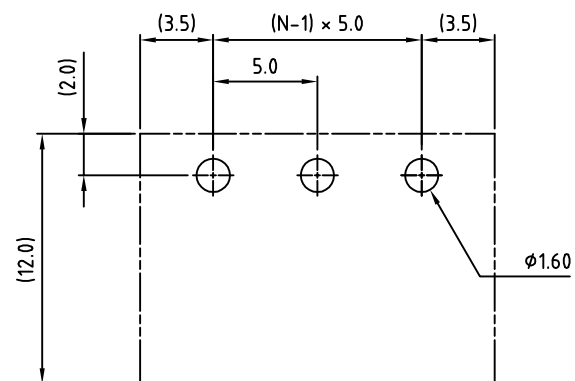P.C.B LAYOUT

PART NUMBER:

OSTOQXX7151

No. of Poles
02 2 Poles
03 3 Poles
... ..
24 24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey

OST ON-SHORE TECHNOLOGY, INC.

TITLE		OSTOQ 5.0mm series Closed right-angle 2p-24p					
PART NO.	OSTOQXX7151			DWG NO.	OSTOQXX7151.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
Shi Jun 2006.10.31	Marvin 2006.10.31	Marvin 2006.10.31	Marvin 2006.10.31		UNIT: mm	Tolerance	
					SCALE: NONE	X.	±0.50
					REV: G	X.X	±0.30
						X.XX	±0.10
						X°	±1°
SHEET: 01/01							

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF ON-SHORE
TECHNOLOGY, INC. AND SHALL NOT BE
REPRODUCED, COPIED OR USED IN ANY
MANNER WITHOUT THE PRIOR WRITTEN
CONSENT OF ON-SHORE TECHNOLOGY,
INC.