



M.S.KENNEDY CORP.

ULTRA HIGH VOLTAGE DUAL OPERATIONAL AMPLIFIER


165

4707 Dey Road Liverpool, N.Y. 13088

(315) 701-6751

FEATURES:


- Internally Compensated For Gains > 10 V/V
- Monolithic MOS Technology
- High Voltage Operation : 350V
- Low Quiescent Current : 4mA Total
- High Output Current : 60mA Min. Per Channel
- No Second Breakdown
- High Speed : 40V/ μ S Typ.
- Space Efficient Dual Amplifier

MIL-PRF-38534 QUALIFIED**MSK165**

DESCRIPTION:

The MSK 165 is an ultra high voltage dual monolithic MOSFET operational amplifier ideally suited for electrostatic transducer and electrostatic deflection applications. With a total supply voltage rating of 350 volts and 60mA of output current available from each amplifier, the MSK 165 is also an excellent low cost choice for high voltage piezo drive circuits. The MOSFET output frees the MSK 165 from secondary breakdown limitations and power dissipation is kept to a minimum with a quiescent current rating of only 4mA total. The MSK 165 is internally compensated for gains of 10 V/V or greater and is packaged in a hermetically sealed 14 pin power dip with heat sink bolt down tabs.

EQUIVALENT SCHEMATIC

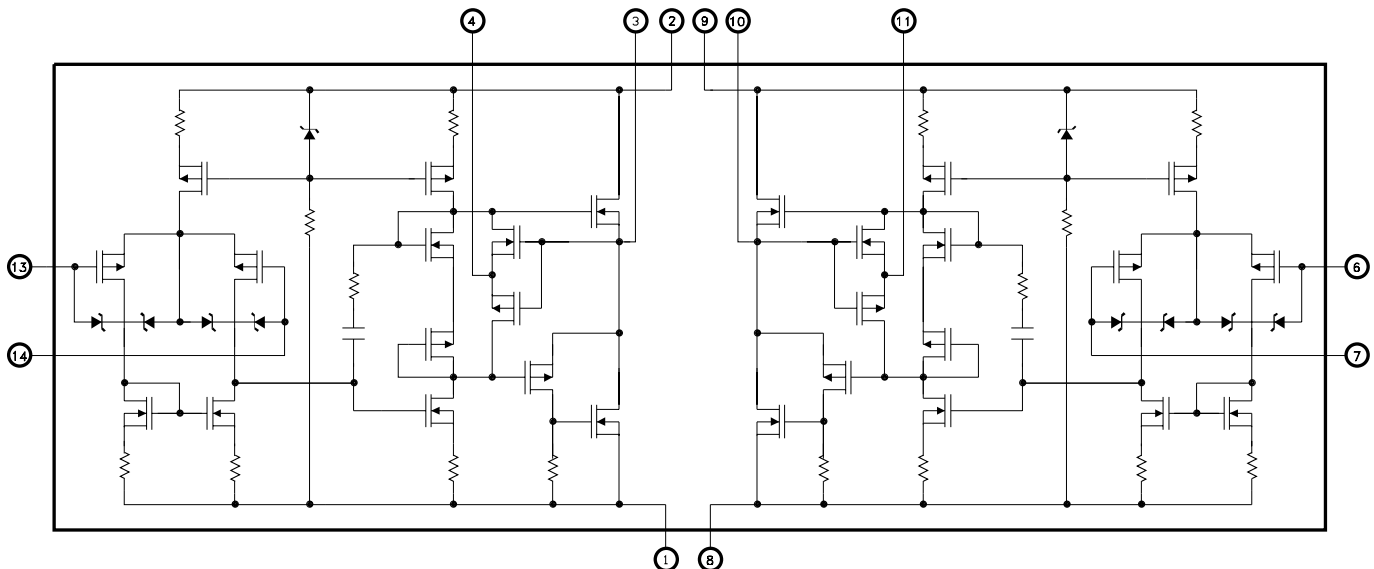

TYPICAL APPLICATIONS

- High Voltage Piezo Electric Positioning
- Electrostatic Deflection
- Computer to Vacuum Tube Interface
- Ultra High Voltage
Dual Op-Amp Applications
- Bridge Amplifier

PIN-OUT INFORMATION

1	-Vcc 1	14	Non-Inverting Input 1
2	+Vcc 1	13	Inverting Input 1
3	Output Drive 1	12	N/C
4	Current Sense 1	11	Current Sense 2
5	N/C	10	Output Drive 2
6	Inverting Input 2	9	+Vcc 2
7	Non -Inverting Input 2	8	-Vcc 2

ABSOLUTE MAXIMUM RATINGS

V_{CC} ②	Total Supply Voltage	350V
$\pm I_{OUT}$	Output Current (within S.O.A.)	60mA
$\pm I_{OUTP}$	Output Current Peak	120mA
V_{IND}	Input Voltage (Differential).	$\pm 16V$
V_{IN}	Input Voltage (Common Mode).	$\pm V_{CC}$
T_J	Junction Temperature.	150°C

T_{ST}	Storage Temperature.	-65°C to +150°C
T_{LD}	Lead Temperature.	300°C
T_C	Case Operating Temperature (MSK165B).	-55°C to +125°C
	(MSK165).	-40°C to +85°C
R_{TH}	Thermal Resistance (DC Each Amplifier) Junction to Case.	12°C/W

ELECTRICAL SPECIFICATIONS

Parameter	Test Conditions ①	Group A	MSK165B			MSK165			Units
		Subgroup	Min.	Typ.	Max.	Min.	Typ.	Max.	
STATIC									
Supply Voltage Range ② ④ ⑨		-	± 50	± 150	± 175	± 50	± 150	± 175	V
Quiescent Current	VIN = 0V	1	-	± 1.4	± 2.0	-	± 1.4	± 2.0	mA
		2	-	± 2.0	± 3.0	-	-	-	mA
		3	-	± 1.0	± 2.1	-	-	-	mA
INPUT									
Offset Voltage	VIN = 0V	1	-	± 15	± 30	-	± 15	± 30	mV
Offset Voltage Drift ④	VIN = 0V	2,3	-	± 40	± 65	-	± 40	-	μV/°C
Offset Voltage vs ± Vcc ④	VIN = 0V	1	-	± 20	± 32	-	± 20	± 32	μV/V
Input Bias Current ④	VCM = 0V	1,3	-	± 5	± 50	-	± 5	± 100	pA
		2	-	-	± 50	-	-	-	nA
Input Impedance ④	(DC)	-	-	10 ¹¹	-	-	10 ¹¹	-	Ω
Input Capacitance ④		-	-	5	-	-	5	-	pF
Common Mode Rejection ④	VCM = ± 90VDC	-	84	94	-	84	94	-	dB
Noise	1Hz≤f≤10Hz	-	-	50	-	-	50	-	μVRMS
OUTPUT									
Output Voltage Swing	IOUT = ± 40mA Peak	4	± 138	± 141	-	± 138	± 141	-	V
Output Current	VOUT = MAX	4	± 60	± 120	-	± 60	± 120	-	mA
Power Bandwidth ④	VOUT = 280VPP	-	-	26	-	-	26	-	KHz
Resistance ④	No Load RCL = 0Ω	-	-	150	-	-	150	-	Ω
Settling Time to 0.1% ③ ④	10V Step	-	-	12	-	-	12	-	μS
Capacitive Load ④	AV = + 1V/V	-	10	-	-	10	-	-	nF
TRANSFER CHARACTERISTICS									
Slew Rate		4	20	40	-	10	20	-	V/μS
Open Loop Voltage Gain ④	F = 15Hz RL = 5KΩ	4	94	106	-	94	106	-	dB

NOTES:

- ① Unless otherwise noted, $\pm V_{CC} = \pm 150V_{DC}$ and specifications apply to each amplifier.
- ② Derate maximum supply voltage 0.5V/ $^{\circ}C$ below $T_C = +25^{\circ}C$. No derating is needed above $T_C = 25^{\circ}C$.
- ③ $A_V = -10V/V$ measured in false summing junction circuit.
- ④ Devices shall be capable of meeting the parameter, but need not be tested. Typical parameters are for reference only.
- ⑤ Industrial grade devices shall be tested to subgroups 1 and 4 unless otherwise requested.
- ⑥ Military grade devices ('B' suffix) shall be 100% tested to subgroups 1,2,3 and 4.
- ⑦ Subgroup 5 and 6 testing available upon request.
- ⑧ Subgroup 1,4 $T_C = +25^{\circ}C$
Subgroup 2,5 $T_C = +125^{\circ}C$
Subgroup 3,6 $T_A = -55^{\circ}C$
- ⑨ Electrical specifications are derated for power supply voltages less than $\pm 50V_{DC}$.

APPLICATION NOTES

CURRENT LIMIT

Current limit resistor value can be calculated as follows:

$$RCL = 3/I_{LIM}$$

It is recommended that the user set up the value of current limit as close as possible to the maximum expected output current to protect the amplifier. The minimum value of current limit resistance is 33 ohms. The maximum practical value is 500 ohms. Current limit will vary with case temperature. Refer to the typical performance graphs as a guide. Since load current passes through the current limit resistor, a loss in output voltage swing will occur. The following formula approximates output voltage swing reduction:

$$V_R = I_O * RCL$$


When the device is in current limit, there will be spurious oscillations present on the negative half cycle. The frequency of the oscillation is application dependant and can not be predicted. Oscillation will cease when the device comes out of current limit. If current limit is not required simply short pin 3 to pin 4 and pin 10 to pin 11.

INPUT PROTECTION

Input protection circuitry within the MSK 165 will clip differential input voltages greater than 16 volts. The inputs are also protected against common mode voltages up to the supply rails as well as static discharge. There are 300 ohm current limiting resistors in series with each input. These resistors may become damaged in the event the input overload is capable of driving currents above 1mA. If severe overload conditions are expected, external input current limiting resistors are recommended.

OUTPUT SNUBBER NETWORK

A 100 ohm resistor and a 330pF capacitor connected in series from the output of the amplifier to ground is recommended for applications where load capacitance is less than 330pF. For larger values of load capacitance, the output snubber network may be omitted. If loop stability becomes a problem due to excessively high load capacitance, a 100 ohm resistor may be added between the output of the amplifier (the junction of RCL and pin 4 or 11) and the load. A small tradeoff with bandwidth must be made in this configuration. The graph below illustrates the effect of capacitive load on open loop gain.


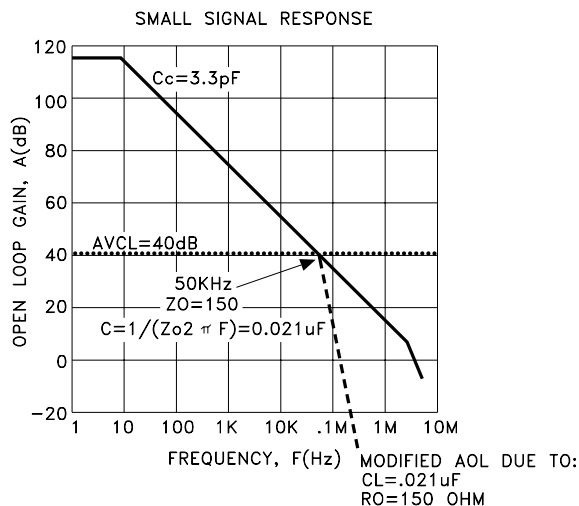


SAFE OPERATING AREA (SOA)

The MOSFET output stage of this power operational amplifier has two distinct limitations:

1. The current handling capability of the die metallization.
2. The junction temperature of the output MOSFET's.












NOTE: The output stage is protected against transient flyback. However, for protection against sustained, high energy flyback, external fast-recovery reverse biased diodes should be connected from the output to ground.

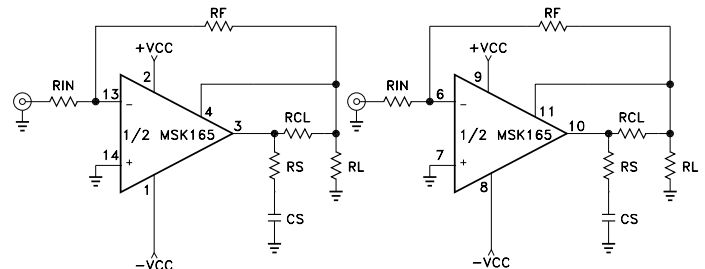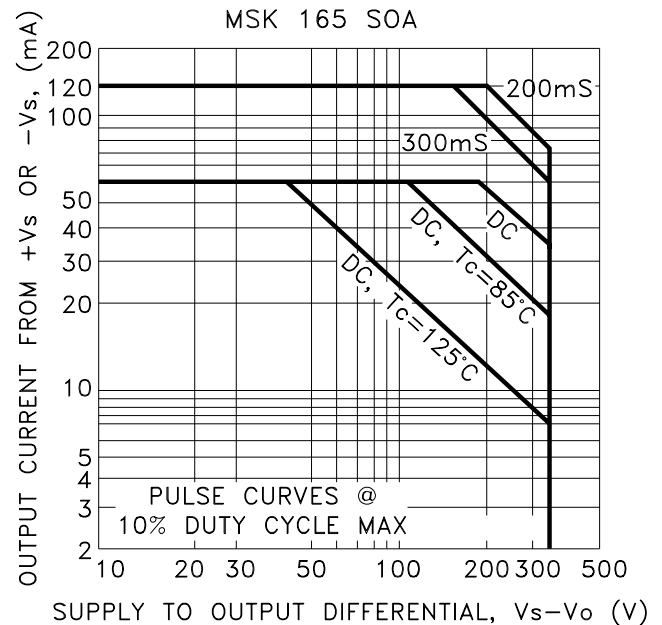

STABILITY


The MSK 165 has sufficient phase margin when compensated for unity gain to be stable with capacitive loads of at least 10nF at gains of 2V/V or greater. However, it is recommended that the parallel sum of the input and feedback resistor be 1000 ohms or less for closed loop gains of ten or less to minimize phase shift caused by the R-C network formed by the input resistor, feedback resistor and input capacitance. An effective method of checking amplifier stability is to apply the worst case capacitive load to the output of the amplifier and drive a small signal square wave across it. If overshoot is less than 25%, the system will typically be stable.

TYPICAL PERFORMANCE CURVES

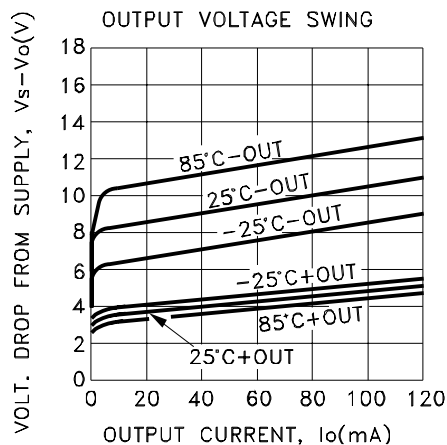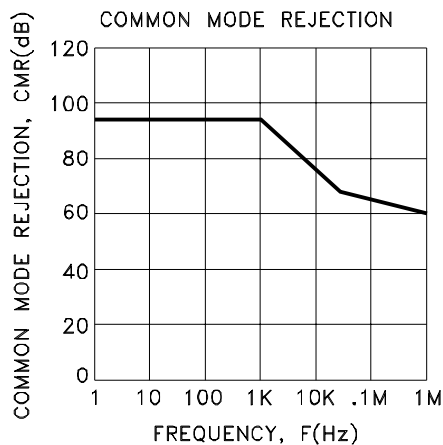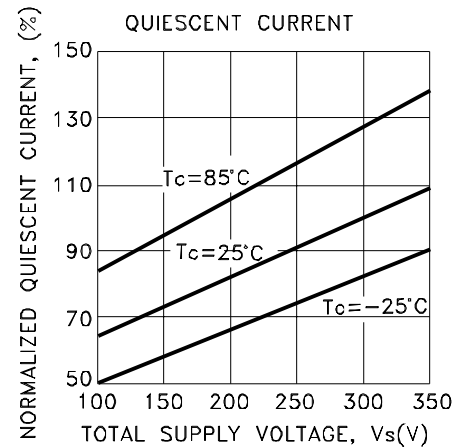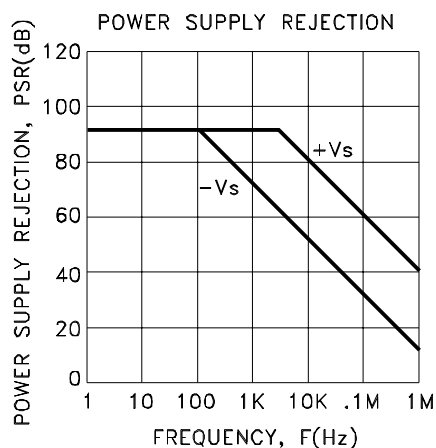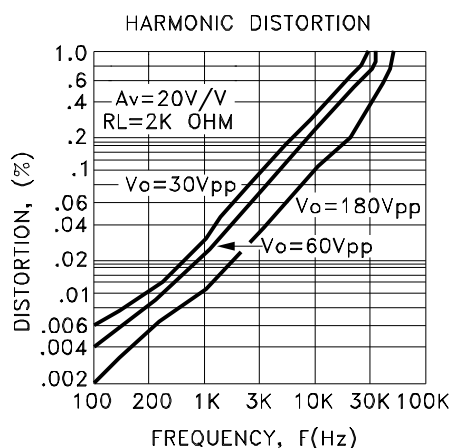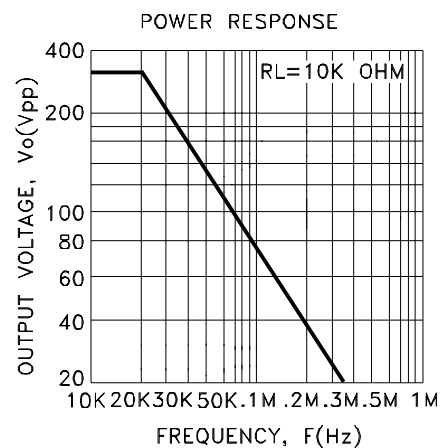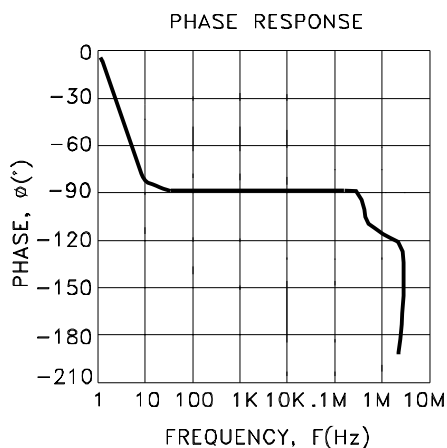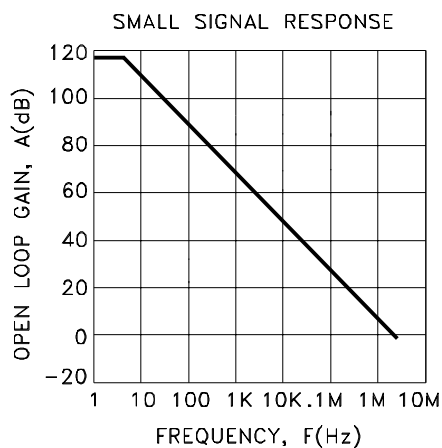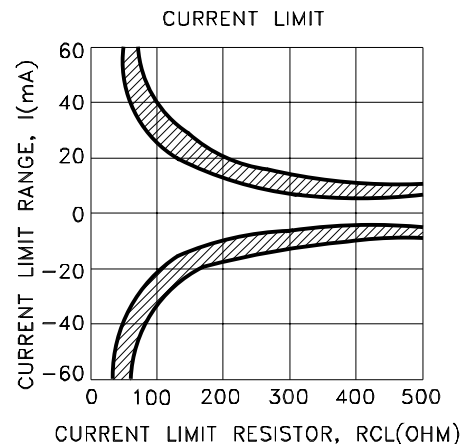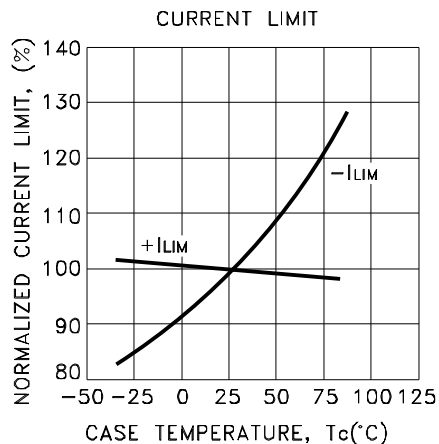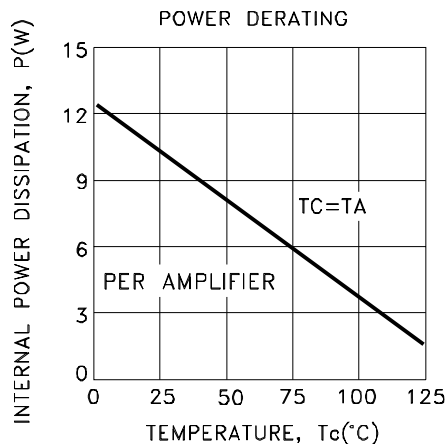

MECHANICAL SPECIFICATIONS

MSK165

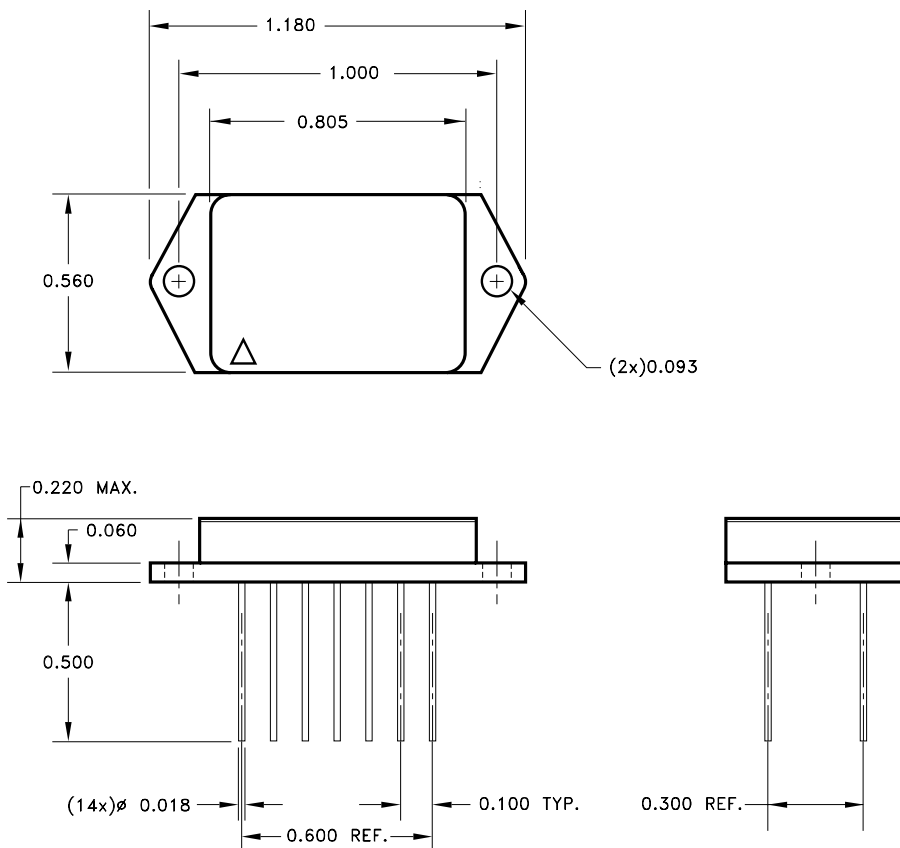

ESD TRIANGLE INDICATES PIN 1.
ALL DIMENSIONS ARE ± 0.010 INCHES UNLESS OTHERWISE LABELED.

ORDERING INFORMATION

Part Number	Screening Level
MSK165	Industrial
MSK165B	Military-Mil-PRF-38534

M.S. Kennedy Corp.
4707 Dey Road, Liverpool, New York 13088
Phone (315) 701-6751
FAX (315) 701-6752
www.mskennedy.com

The information contained herein is believed to be accurate at the time of printing. MSK reserves the right to make changes to its products or specifications without notice, however, and assumes no liability for the use of its products.