

To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

38B4 Group

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

DESCRIPTION

The 38B4 group is the 8-bit microcomputer based on the 740 family core technology.

The 38B4 group has six 8-bit timers, a 16-bit timer, a fluorescent display automatic display circuit, 12-channel 10-bit A-D converter, a serial I/O with automatic transfer function, which are available for controlling musical instruments and household appliances.

FEATURES


- Basic machine-language instructions 71
- Minimum instruction execution time 0.48 μ s
(at 4.2 MHz oscillation frequency)
- Memory size
 - ROM 48K to 60K bytes
 - RAM 1024 to 2048 bytes
- Programmable input/output ports 51
- High-breakdown-voltage output ports 36
- Software pull-up resistors (Ports P5, P6₁ to P6₅, P7, P8₄ to P8₇, P9)
- Interrupts 21 sources, 16 vectors
- Timers 8-bit $\times$ 6, 16-bit $\times$ 1
- Serial I/O1 (Clock-synchronized) 8-bit $\times$ 1
..... (max. 256-byte automatic transfer function)
- Serial I/O2 (UART or Clock-synchronized) 8-bit $\times$ 1
- PWM 14-bit $\times$ 1
..... 8-bit $\times$ 1 (also functions as timer 6)
- A-D converter 10-bit $\times$ 12 channels
- Fluorescent display function Total 40 control pins
- Interrupt interval determination function 1
- Watchdog timer 20-bit $\times$ 1

- Buzzer output 1
- Clock generating circuit Built-in 2 circuits
(connect to external ceramic resonator or quartz-crystal oscillator)
- Power source voltage
 - In high-speed mode 4.0 to 5.5 V
(at 4.2 MHz oscillation frequency) 2.7 to 5.5 V
(at 2.0 MHz oscillation frequency)
 - In middle-speed mode 2.7 to 5.5 V
(at 4.2 MHz oscillation frequency)
 - In low-speed mode 2.7 to 5.5 V
(at 32 kHz oscillation frequency)
- Power dissipation
 - In high-speed mode 35 mW
(at 4.2 MHz oscillation frequency)
 - In low-speed mode 60 μ W
(at 32 kHz oscillation frequency, at 3 V power source voltage)
 - In stop mode 1 μ A
(at clock stop)
- Operating temperature range -20 to 85 °C

APPLICATION

Musical instruments, VCR, household appliances, etc.

PIN CONFIGURATION (TOP VIEW)

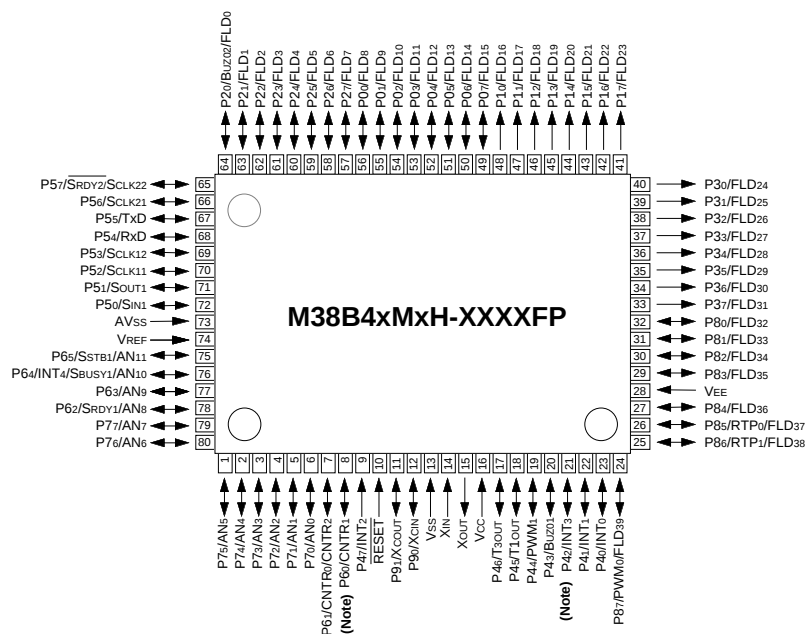

Package type : 80P6N-A
80-pin plastic-molded QFP

Fig. 1 Pin configuration of M38B4xMxH-XXXXFP

FUNCTIONAL BLOCK

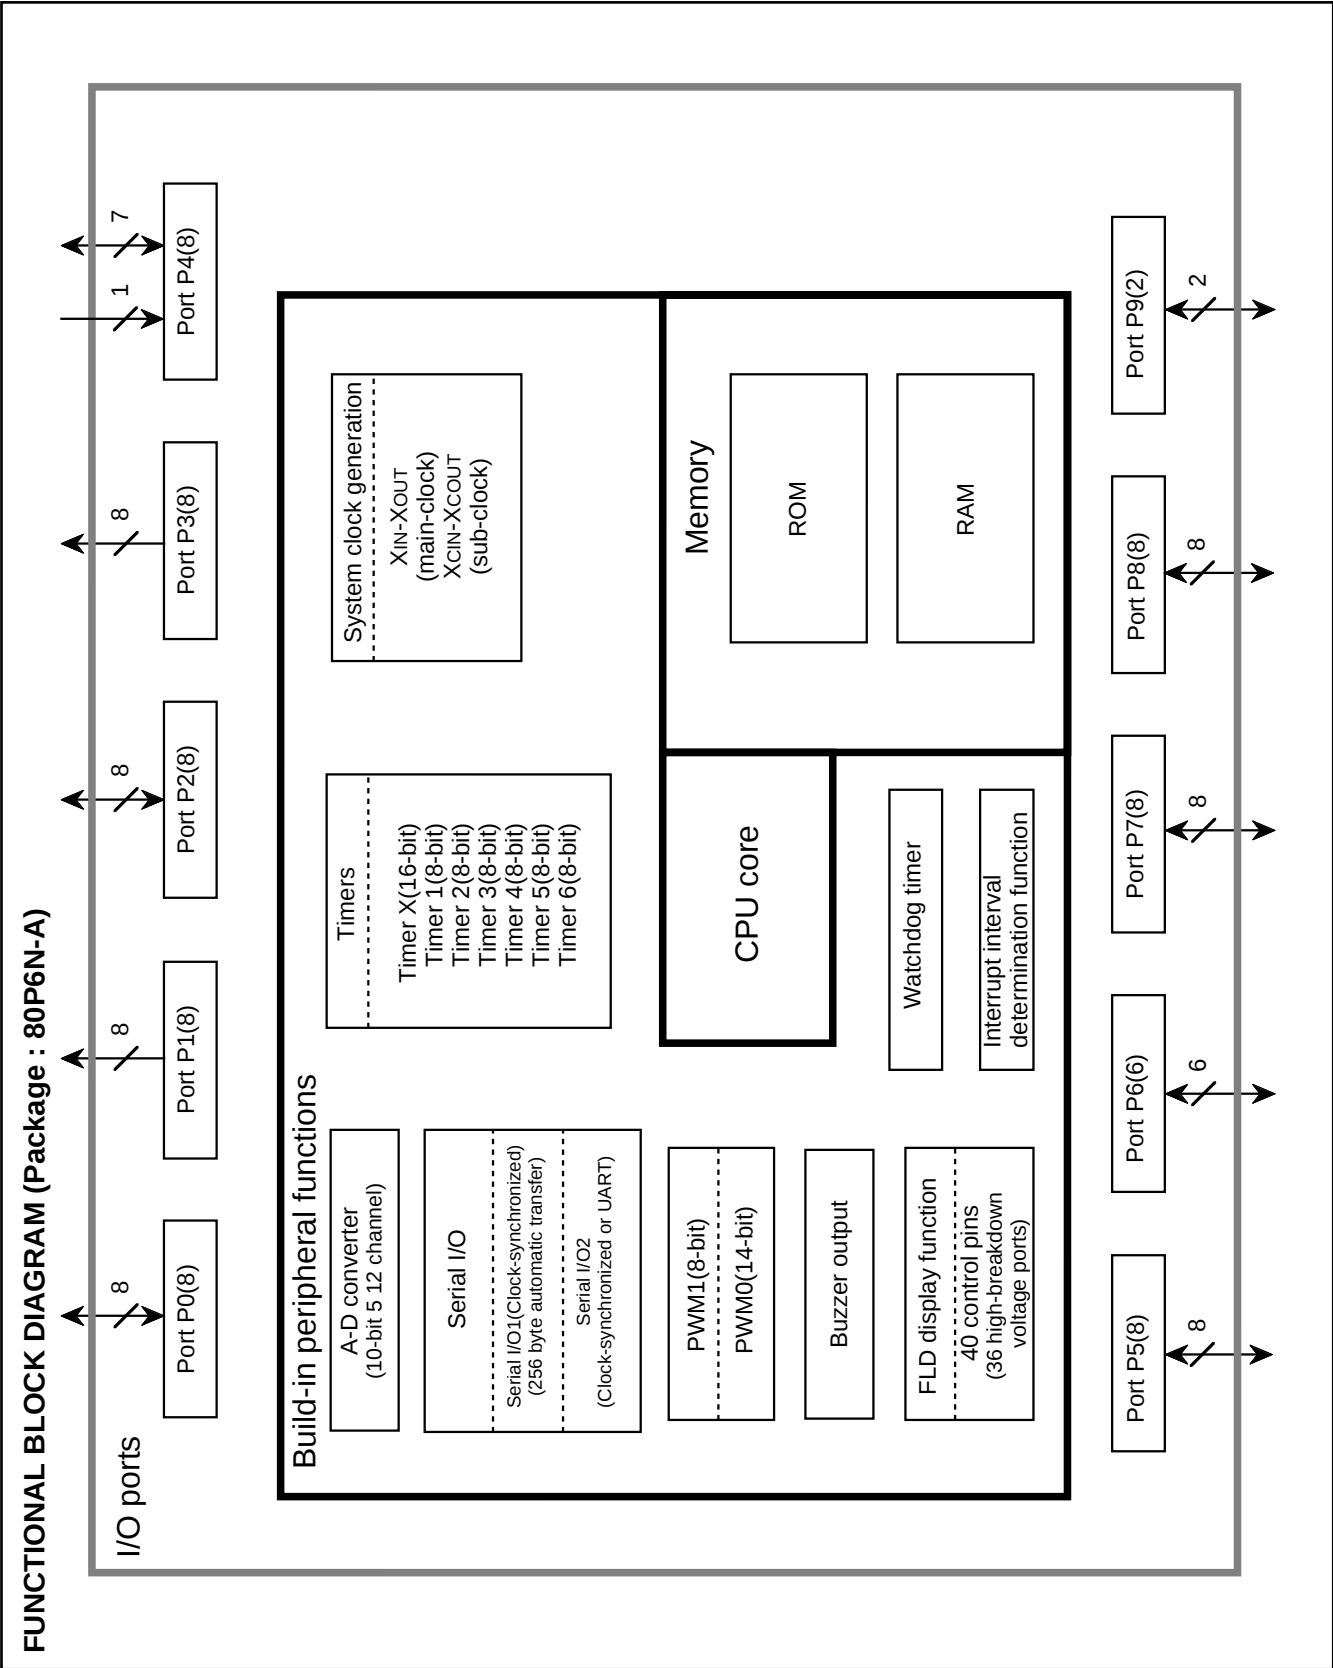


Fig. 2 Functional block diagram

PIN DESCRIPTION

Table 1 Pin description (1)

Pin	Name	Function	Function except a port function
VCC, VSS	Power source	• Apply voltage of 4.0–5.5 V to VCC, and 0 V to VSS.	
VEE	Pull-down power source	• Apply voltage supplied to pull-down resistors of ports P0, P1, and P3.	
VREF	Reference voltage	• Reference voltage input pin for A-D converter.	
AVSS	Analog power source	• Analog power source input pin for A-D converter. • Connect to VSS.	
RESET	Reset input	• Reset input pin for active “L”.	
XIN	Clock input	• Input and output pins for the main clock generating circuit. • Feedback resistor is built in between XIN pin and XOUT pin.	
XOUT	Clock output	• Connect a ceramic resonator or quartz-crystal oscillator between the XIN and XOUT pins to set the oscillation frequency. • When an external clock is used, connect the clock source to the XIN pin and leave the XOUT pin open. • The clock is used as the oscillating source of system clock.	
P00/FLD8– P07/FLD15	I/O port P0	• 8-bit I/O port. • I/O direction register allows each pin to be individually programmed as either input or output. • At reset, this port is set to input mode. • A pull-down resistor is built in between port P0 and the VEE pin. • CMOS compatible input level. • High-breakdown-voltage P-channel open-drain output structure. • At reset, this port is set to VEE level.	• FLD automatic display pins
P10/FLD16– P17/FLD23	Output port P1	• 8-bit output port. • A pull-down resistor is built in between port P1 and the VEE pin. • High-breakdown-voltage P-channel open-drain output structure. • At reset, this port is set to VEE level.	• FLD automatic display pins
P20/BUZ02/ FLD0– P27/FLD7	I/O port P2	• 8-bit I/O port with the same function as port P0. • Low-voltage input level. • High-breakdown-voltage P-channel open-drain output structure.	• FLD automatic display pins • Buzzer output pin (P20)
P30/FLD24– P37/FLD31	Output port P3	• 8-bit output port. • A pull-down resistor is built in between port P3 and the VEE pin. • High-breakdown-voltage P-channel open-drain output structure. • At reset, this port is set to VEE level.	• FLD automatic display pins
P40/INT0, P41/INT1, P42/INT3 P43/BUZ01 P44/PWM1	I/O port P4	• 7-bit I/O port with the same function as port P0. • CMOS compatible input level • N-channel open-drain output structure.	• Interrupt input pins In the mask option type P, INT3 cannot be used. • Buzzer output pin • PWM output pin (Timer output pin)
P45/T1OUT, P46/T3OUT			• Timer output pin
P47/INT2	Input port P4	• 1-bit input port. • CMOS compatible input level.	• Interrupt input pin

Table 2 Pin description (2)

Pin	Name	Function	Function except a port function
P50/SIN1, P51/SOUT1, P52/SCLK11, P53/SCLK12	I/O port P5	8-bit CMOS I/O port with the same function as port P0. - CMOS compatible input level. - CMOS 3-state output structure.	Serial I/O1 function pins
P54/RxD, P55/TxD, P56/SCLK21, P57/SRDY2/ SCLK22			Serial I/O2 function pins
P60/CNTR1	I/O port P6	1-bit I/O port with the same function as port P0. - CMOS compatible input level. - N-channel open-drain output structure.	Timer input pin In the mask option type P, CNTR1 cannot be used.
P61/CNTR0/ CNTR2		5-bit CMOS I/O port with the same function as port P0. - CMOS compatible input level. - CMOS 3-state output structure.	Timer I/O pin
P62/SRDY1/ AN8			- Serial I/O1 function pin - A-D conversion input pin
P63/AN9			- A-D conversion input pin - Dimmer signal output pin
P64/INT4/ SBUSY1/AN10, P65/SSTB1/ AN11			- Serial I/O1 function pin - A-D conversion input pin - Interrupt input pin (P64)
P70/AN0– P77/AN7	I/O port P7	8-bit CMOS I/O port with the same function as port P0. - CMOS compatible input level. - CMOS 3-state output structure.	A-D conversion input pin
P80/FLD32– P83/FLD35	I/O port P8	4-bit I/O port with the same function as port P0. - Low-voltage input level. - High-breakdown-voltage P-channel open-drain output structure.	FLD automatic display pins
P84/FLD36		4-bit CMOS I/O port with the same function as port P0. - Low-voltage input level. - CMOS 3-state output structure	- FLD automatic display pins - Real time port output
P85/RTP0/ FLD37, P86/RTP1/ FLD38			- FLD automatic display pins 14-bit PWM output
P87/PWM0/ FLD39			
P90/XCIN, P91/XCOUT	I/O port P9	2-bit CMOS I/O port with the same function as port P0. - CMOS compatible input level. - CMOS 3-state output structure.	I/O pins for sub-clock generating circuit (connect a ceramic resonator or a quartz-crystal oscillator)

PART NUMBERING

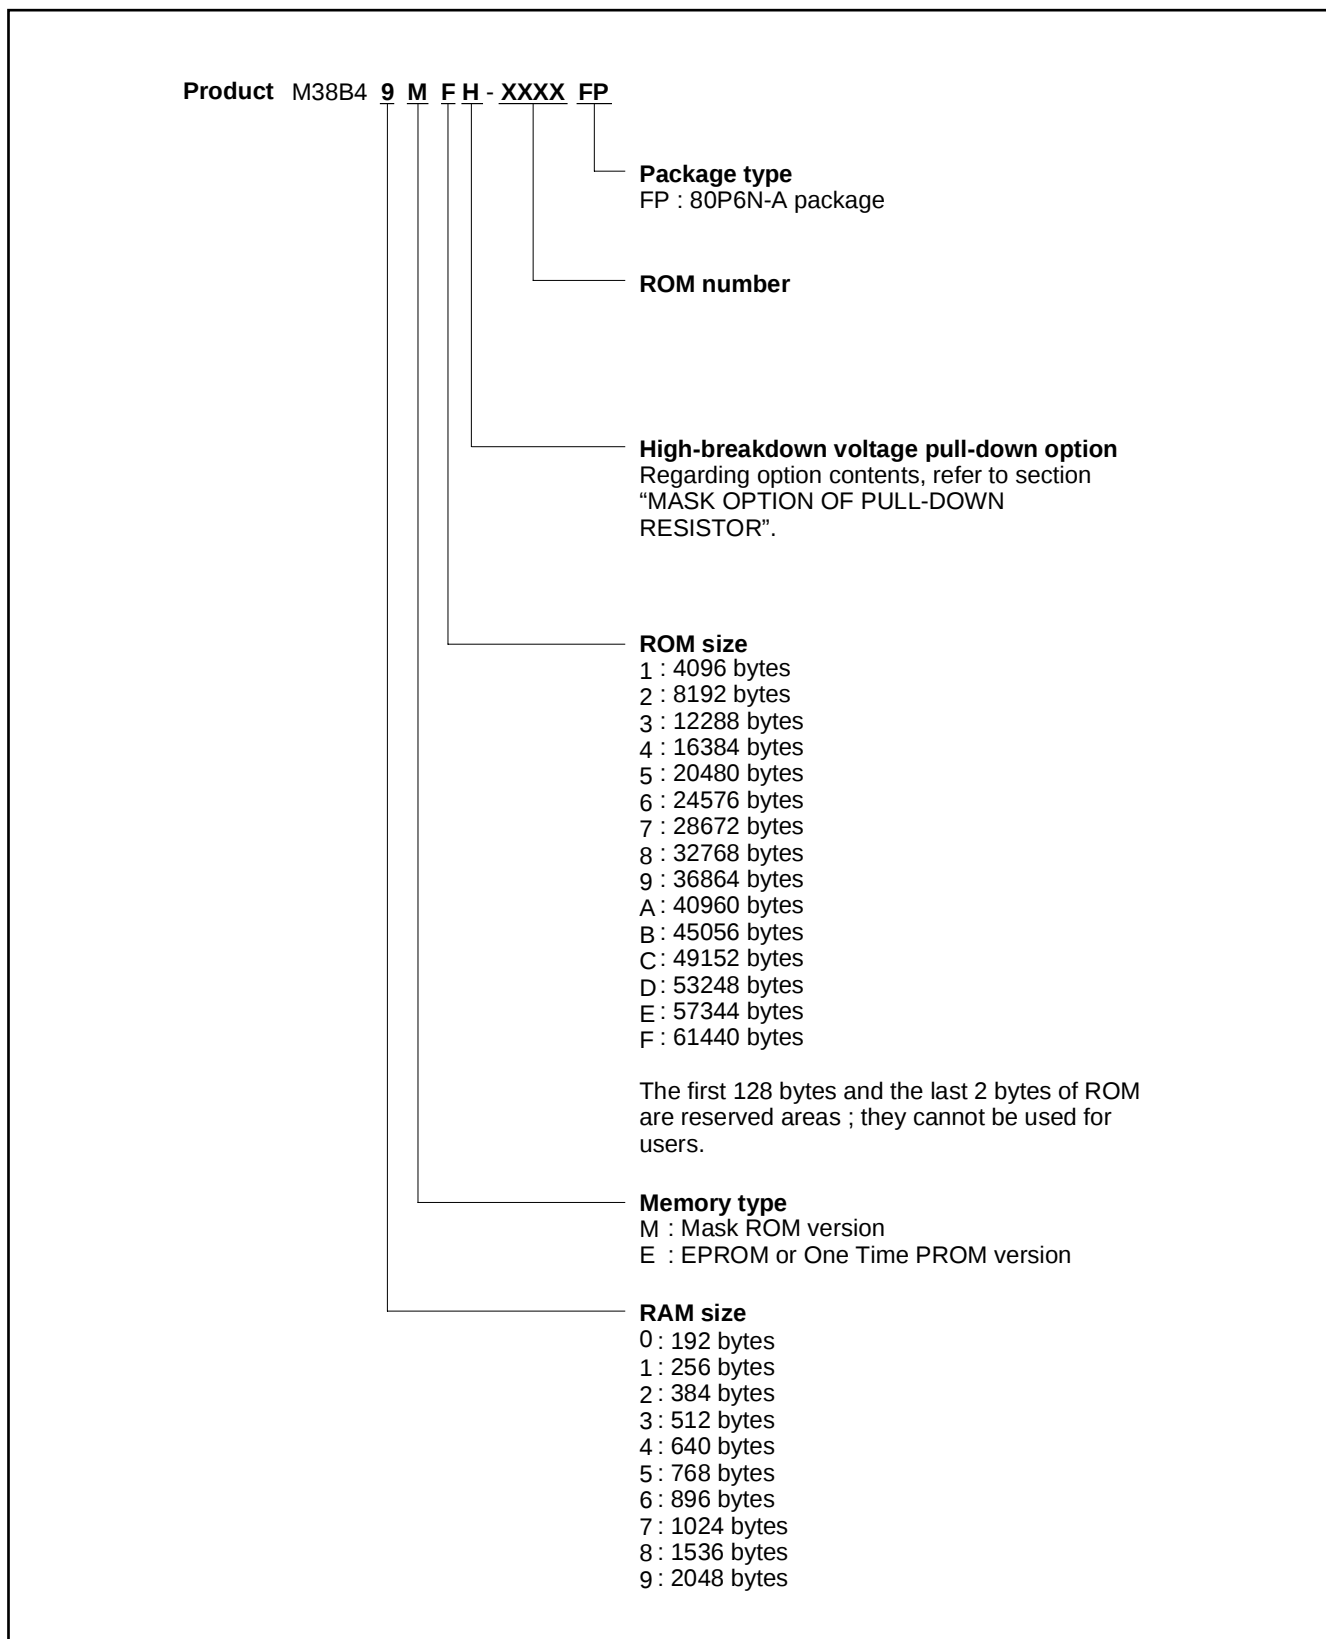


Fig. 3 Part numbering

GROUP EXPANSION

Mitsubishi plans to expand the 38B4 group as follows:

Memory Type

Support for Mask ROM version.

Memory Size

Mask ROM size 48K to 60K bytes

RAM size 1024 to 2048 bytes

Package

80P6N-A 0.8 mm-pitch plastic molded QFP

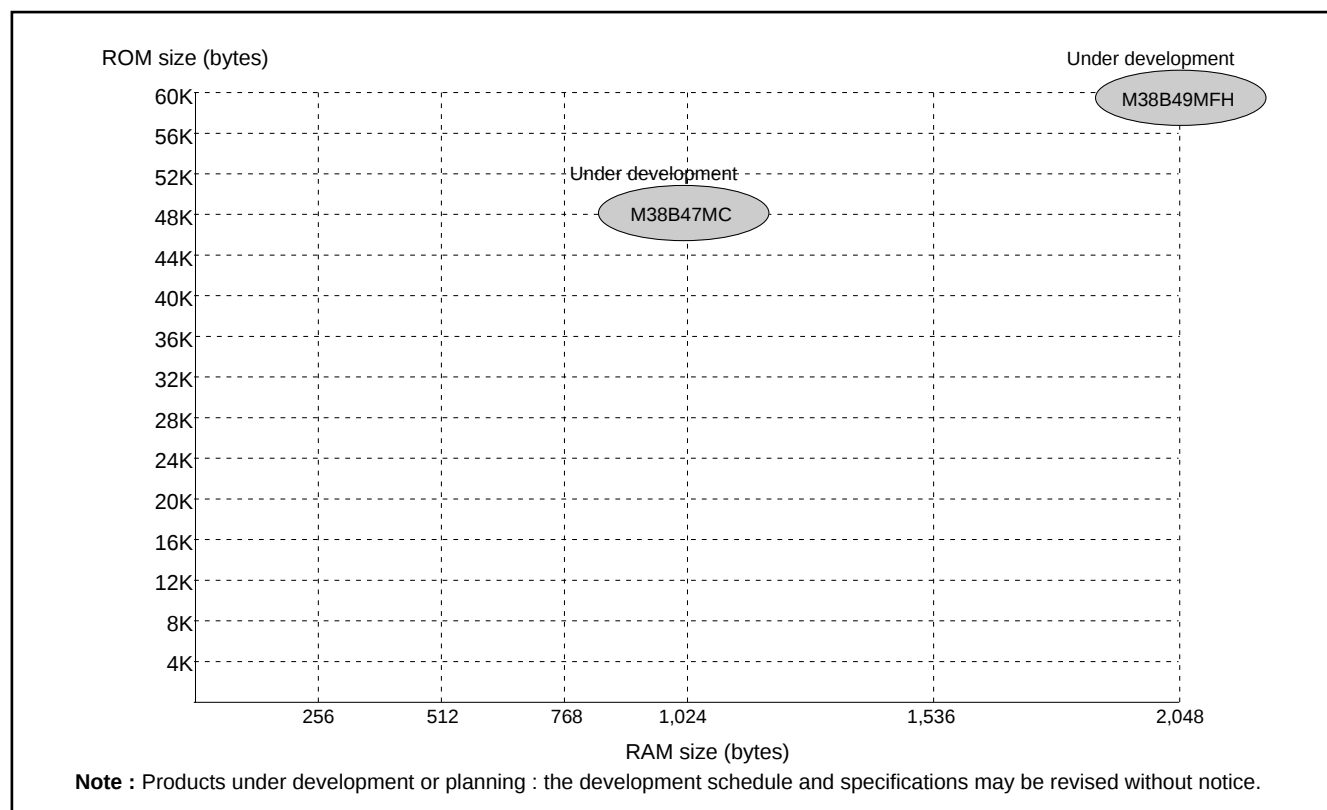


Fig. 4 Memory expansion plan

Currently supported products are listed below.

Table 3 List of supported products

As of Mar. 2000

Product	ROM size (bytes) ROM size for User ()	RAM size (bytes)	Package	Remarks
M38B49MFH-XXXXFP	61440 (61310)	2048	80P6N-A	Mask ROM version
M38B47MCH-XXXXFP	49152 (49022)	1024	80P6N-A	Mask ROM version

FUNCTIONAL DESCRIPTION

Central Processing Unit (CPU)

The 38B4 group uses the standard 740 Family instruction set. Refer to the table of 740 Family addressing modes and machine instructions or the 740 Family Software Manual for details on the instruction set.

Machine-resident 740 Family instructions are as follows:

The FST and SLW instructions cannot be used.

The STP, WIT, MUL, and DIV instructions can be used.

[Accumulator (A)]

The accumulator is an 8-bit register. Data operations such as data transfer, etc., are executed mainly through the accumulator.

[Index Register X (X)]

The index register X is an 8-bit register. In the index addressing modes, the value of the OPERAND is added to the contents of register X and specifies the real address.

[Index Register Y (Y)]

The index register Y is an 8-bit register. In partial instruction, the value of the OPERAND is added to the contents of register Y and specifies the real address.

[Stack Pointer (S)]

The stack pointer is an 8-bit register used during subroutine calls and interrupts. This register indicates start address of stored area (stack) for storing registers during subroutine calls and interrupts.

The low-order 8 bits of the stack address are determined by the contents of the stack pointer. The high-order 8 bits of the stack address are determined by the stack page selection bit. If the stack page selection bit is "0", the high-order 8 bits becomes "0016". If the stack page selection bit is "1", the high-order 8 bits becomes "0116".

The operations of pushing register contents onto the stack and popping them from the stack are shown in Figure 6.

Store registers other than those described in Figure 6 with program when the user needs them during interrupts or subroutine calls (see Table 4).

[Program Counter (PC)]

The program counter is a 16-bit counter consisting of two 8-bit registers PCH and PCL. It is used to indicate the address of the next instruction to be executed.

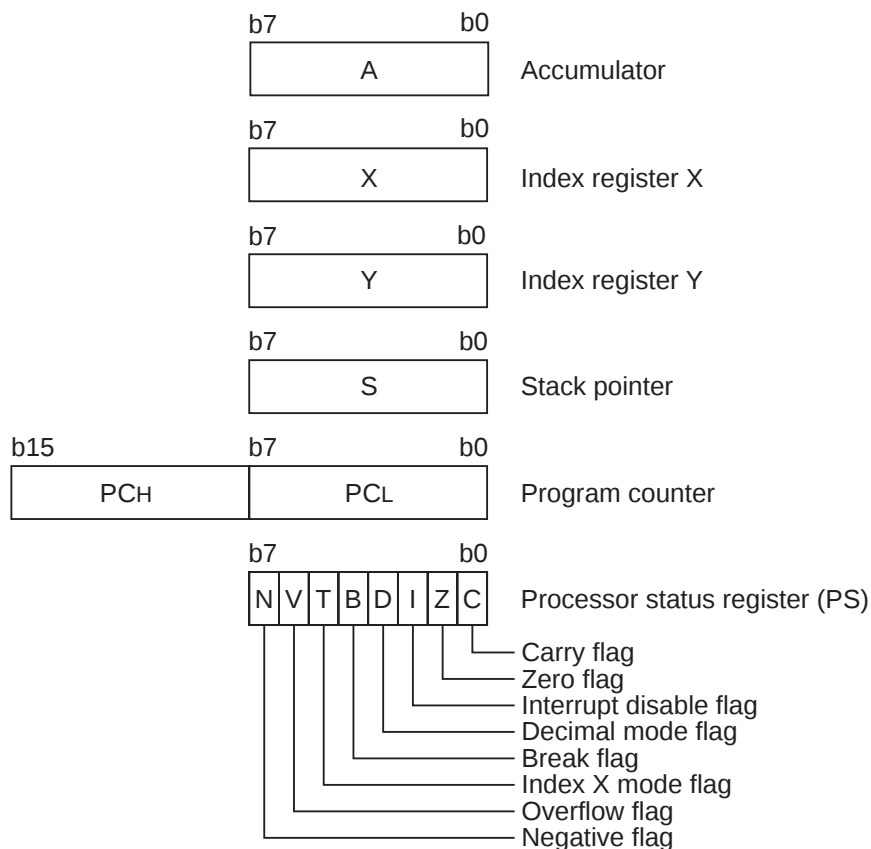


Fig. 5 740 Family CPU register structure

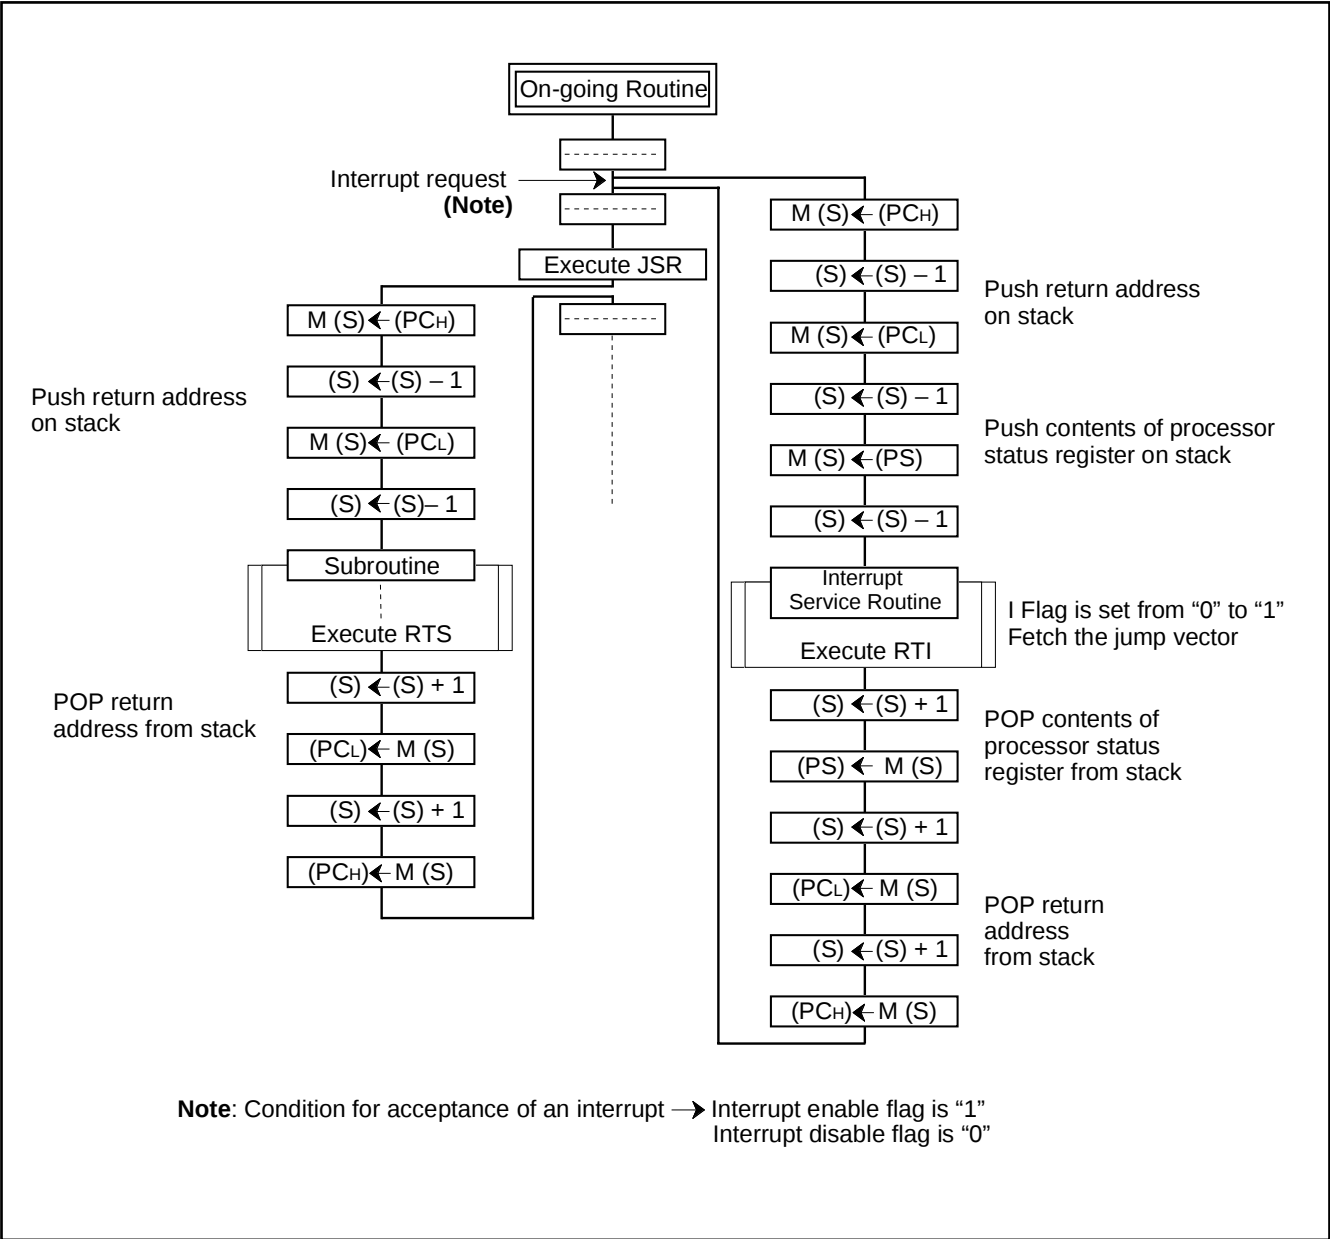


Fig. 6 Register push and pop at interrupt generation and subroutine call

Table 4 Push and pop instructions of accumulator or processor status register

	Push instruction to stack	Pop instruction from stack
Accumulator	PHA	PLA
Processor status register	PHP	PLP

[Processor Status Register (PS)]

The processor status register is an 8-bit register consisting of 5 flags which indicate the status of the processor after an arithmetic operation and 3 flags which decide MCU operation. Branch operations can be performed by testing the Carry (C) flag, Zero (Z) flag, Overflow (V) flag, or the Negative (N) flag. In decimal mode, the Z, V, N flags are not valid.

•Bit 0: Carry flag (C)

The C flag contains a carry or borrow generated by the arithmetic logic unit (ALU) immediately after an arithmetic operation. It can also be changed by a shift or rotate instruction.

•Bit 1: Zero flag (Z)

The Z flag is set if the result of an immediate arithmetic operation or a data transfer is "0", and cleared if the result is anything other than "0".

•Bit 2: Interrupt disable flag (I)

The I flag disables all interrupts except for the interrupt generated by the BRK instruction.

Interrupts are disabled when the I flag is "1".

•Bit 3: Decimal mode flag (D)

The D flag determines whether additions and subtractions are executed in binary or decimal. Binary arithmetic is executed when this flag is "0"; decimal arithmetic is executed when it is "1".

Decimal correction is automatic in decimal mode. Only the ADC and SBC instructions can be used for decimal arithmetic.

•Bit 4: Break flag (B)

The B flag is used to indicate that the current interrupt was generated by the BRK instruction. The BRK flag in the processor status register is always "0". When the BRK instruction is used to generate an interrupt, the processor status register is pushed onto the stack with the break flag set to "1".

•Bit 5: Index X mode flag (T)

When the T flag is "0", arithmetic operations are performed between accumulator and memory. When the T flag is "1", direct arithmetic operations and direct data transfers are enabled between memory locations.

•Bit 6: Overflow flag (V)

The V flag is used during the addition or subtraction of one byte of signed data. It is set if the result exceeds +127 to -128. When the BIT instruction is executed, bit 6 of the memory location operated on by the BIT instruction is stored in the overflow flag.

•Bit 7: Negative flag (N)

The N flag is set if the result of an arithmetic operation or data transfer is negative. When the BIT instruction is executed, bit 7 of the memory location operated on by the BIT instruction is stored in the negative flag.

Table 5 Set and clear instructions of each bit of processor status register

	C flag	Z flag	I flag	D flag	B flag	T flag	V flag	N flag
Set instruction	SEC	—	SEI	SED	—	SET	—	—
Clear instruction	CLC	—	CLI	CLD	—	CLT	CLV	—

[CPU Mode Register (CPUM)] 003B16

The CPU mode register contains the stack page selection bit and the internal system clock selection bit etc.

The CPU mode register is allocated at address 003B16.

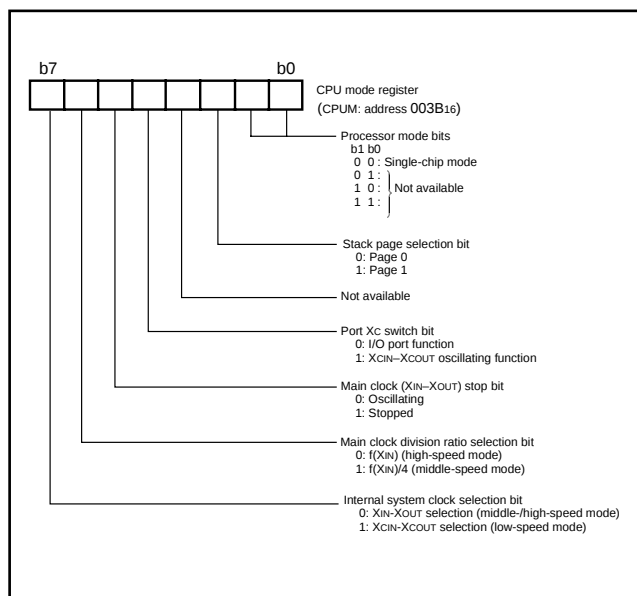


Fig. 7 Structure of CPU mode register

MEMORY

Special Function Register (SFR) Area

The special function register (SFR) area in the zero page contains control registers such as I/O ports and timers.

RAM

RAM is used for data storage and for stack area of subroutine calls and interrupts.

ROM

The first 128 bytes and the last 2 bytes of ROM are reserved for device testing, and the other areas are user areas for storing programs.

Interrupt Vector Area

The interrupt vector area contains reset and interrupt vectors.

Zero Page

The 256 bytes from addresses 0000₁₆ to 00FF₁₆ are called the zero page area. The internal RAM and the special function registers (SFR) are allocated to this area.

The zero page addressing mode can be used to specify memory and register addresses in the zero page area. Access to this area with only 2 bytes is possible in the zero page addressing mode.

Special Page

The 256 bytes from addresses FF00₁₆ to FFFF₁₆ are called the special page area. The special page addressing mode can be used to specify memory addresses in the special page area. Access to this area with only 2 bytes is possible in the special page addressing mode.

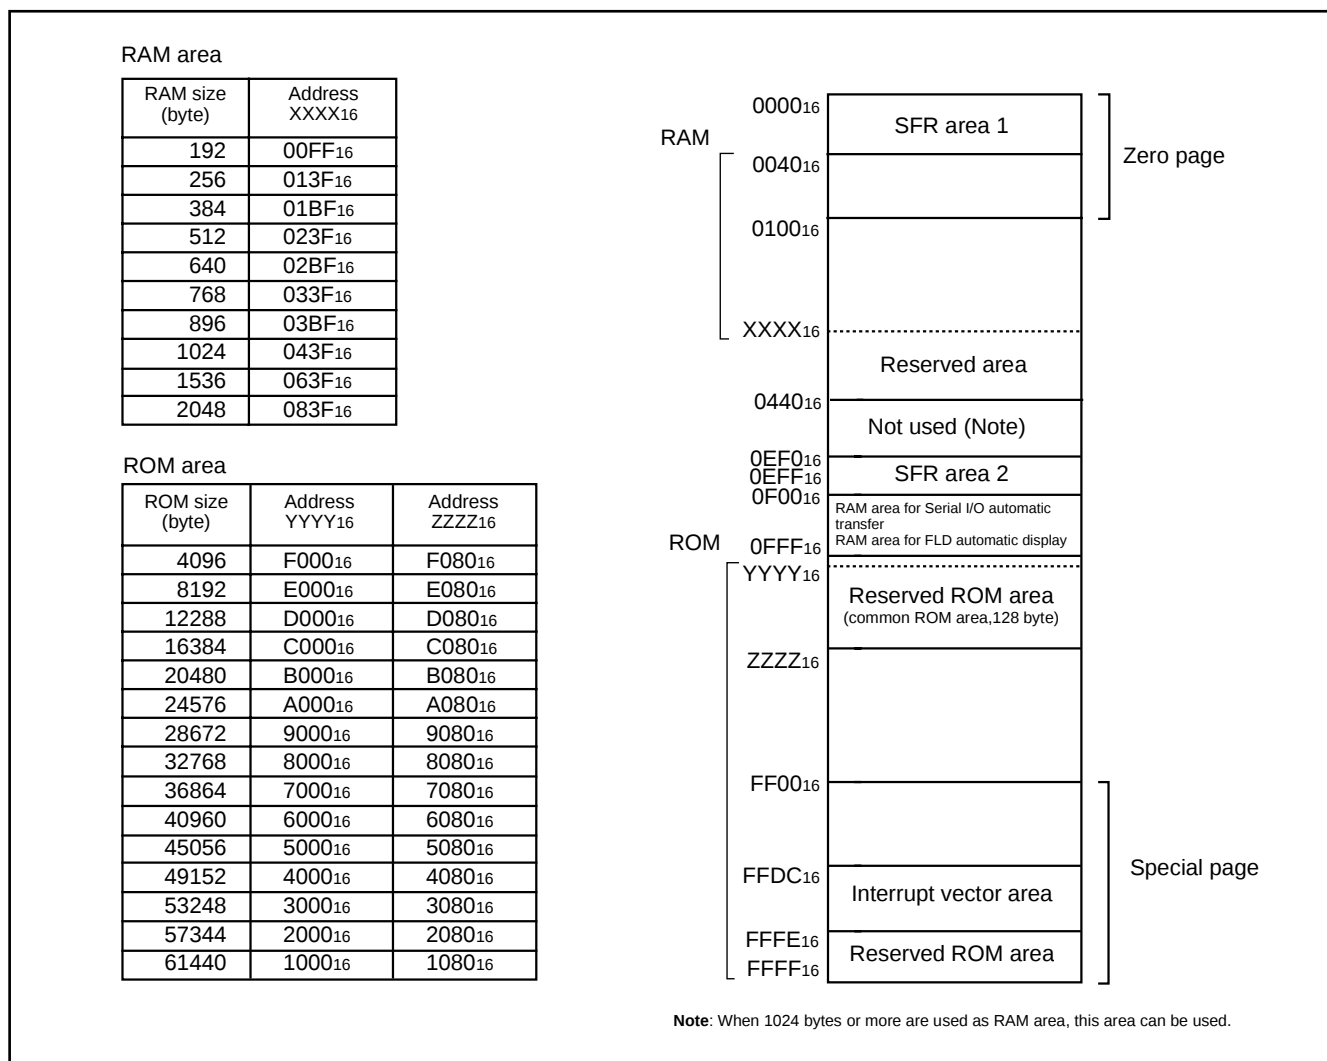


Fig. 8 Memory map diagram

0000 ₁₆	Port P0 (P0)	0020 ₁₆	Timer 1 (T1)
0001 ₁₆	Port P0 direction register (P0D)	0021 ₁₆	Timer 2 (T2)
0002 ₁₆	Port P1 (P1)	0022 ₁₆	Timer 3 (T3)
0003 ₁₆		0023 ₁₆	Timer 4 (T4)
0004 ₁₆	Port P2 (P2)	0024 ₁₆	Timer 5 (T5)
0005 ₁₆	Port P2 direction register (P2D)	0025 ₁₆	Timer 6 (T6)
0006 ₁₆	Port P3 (P3)	0026 ₁₆	PWM control register (PWMCON)
0007 ₁₆		0027 ₁₆	Timer 6 PWM register (T6PWM)
0008 ₁₆	Port P4 (P4)	0028 ₁₆	Timer 12 mode register (T12M)
0009 ₁₆	Port P4 direction register (P4D)	0029 ₁₆	Timer 34 mode register (T34M)
000A ₁₆	Port P5 (P5)	002A ₁₆	Timer 56 mode register (T56M)
000B ₁₆	Port P5 direction register (P5D)	002B ₁₆	Watchdog timer control register (WDTCON)
000C ₁₆	Port P6 (P6)	002C ₁₆	Timer X (low-order) (TXL)
000D ₁₆	Port P6 direction register (P6D)	002D ₁₆	Timer X (high-order) (TXH)
000E ₁₆	Port P7 (P7)	002E ₁₆	Timer X mode register 1 (TXM1)
000F ₁₆	Port P7 direction register (P7D)	002F ₁₆	Timer X mode register 2 (TXM2)
0010 ₁₆	Port P8 (P8)	0030 ₁₆	Interrupt interval determination register (IID)
0011 ₁₆	Port P8 direction register (P8D)	0031 ₁₆	Interrupt interval determination control register (IIDCON)
0012 ₁₆	Port P9 (P9)	0032 ₁₆	A-D control register (ADCON)
0013 ₁₆	Port P9 direction register (P9D)	0033 ₁₆	A-D conversion register (low-order) (ADL)
0014 ₁₆	PWM register (high-order) (PWMH)	0034 ₁₆	A-D conversion register (high-order) (ADH)
0015 ₁₆	PWM register (low-order) (PWM L)	0035 ₁₆	
0016 ₁₆	Baud rate generator (BRG)	0036 ₁₆	
0017 ₁₆	UART control register (UARTCON)	0037 ₁₆	
0018 ₁₆	Serial I/O1 automatic transfer data pointer (SIO1DP)	0038 ₁₆	
0019 ₁₆	Serial I/O1 control register 1 (SIO1CON1)	0039 ₁₆	Interrupt source switch register (IFR)
001A ₁₆	Serial I/O1 control register 2 (SIO1CON2)	003A ₁₆	Interrupt edge selection register (INTEDGE)
001B ₁₆	Serial I/O1 register/Transfer counter (SIO1)	003B ₁₆	CPU mode register (CPUM)
001C ₁₆	Serial I/O1 control register 3 (SIO1CON3)	003C ₁₆	Interrupt request register 1(IREQ1)
001D ₁₆	Serial I/O2 control register (SIO2CON)	003D ₁₆	Interrupt request register 2(IREQ2)
001E ₁₆	Serial I/O2 status register (SIO2STS)	003E ₁₆	Interrupt control register 1(ICON1)
001F ₁₆	Serial I/O2 transmit/receive buffer register (TB/RB)	003F ₁₆	Interrupt control register 2(ICON2)
0EF0 ₁₆	Pull-up control register 1 (PULL1)	0EF8 ₁₆	FLD data pointer (FLDDP)
0EF1 ₁₆	Pull-up control register 2 (PULL2)	0EF9 ₁₆	Port P0FLD/port switch register (P0FPR)
0EF2 ₁₆		0EFA ₁₆	Port P2FLD/port switch register (P2FPR)
0EF3 ₁₆		0EFB ₁₆	Port P8FLD/port switch register (P8FPR)
0EF4 ₁₆	FLDC mode register (FLDM)	0EFC ₁₆	Port P8FLD output control register (P8FLDCON)
0EF5 ₁₆	Tdisp time set register (TDISP)	0EFD ₁₆	Buzzer output control register (BUZCON)
0EF6 ₁₆	Toff1 time set register (TOFF1)	0EFE ₁₆	
0EF7 ₁₆	Toff2 time set register (TOFF2)	0EFF ₁₆	

Fig. 9 Memory map of special function register (SFR)

I/O PORTS

[Direction Registers] PiD

The 38B4 group has 51 programmable I/O pins arranged in eight individual I/O ports (P0, P2, P4₀–P4₆, and P5–P9). The I/O ports have direction registers which determine the input/output direction of each individual pin. Each bit in a direction register corresponds to one pin, and each pin can be set to be input port or output port. When “0” is written to the bit corresponding to a pin, that pin becomes an input pin. When “1” is written to that pin, that pin becomes an output pin. If data is read from a pin set to output, the value of the port output latch is read, not the value of the pin itself. Pins set to input (the bit corresponding to that pin must be set to “0”) are floating and the value of that pin can be read. If a pin set to input is written to, only the port output latch is written to and the pin remains floating.

[High-Breakdown-Voltage Output Ports]

The 38B4 group has 5 ports with high-breakdown-voltage pins (ports P0–P3 and P8₀–P8₃). The high-breakdown-voltage ports have P-channel open-drain output with V_{CC}-45 V of breakdown voltage. Each pin in ports P0, P1, and P3 has an internal pull-down resistor connected to V_{EE}. At reset, the P-channel output transistor of each port latch is turned off, so that it goes to V_{EE} level (“L”) by the pull-down resistor.

Writing “1” (weak drivability) to bit 7 of the FLDC mode register (address 0EF4₁₆) shows the rising transition of the output transistors for reducing transient noise. At reset, bit 7 of the FLDC mode register is set to “0” (strong drivability).

[Pull-up Control Register] PULL

Ports P5, P6₁–P6₅, P7, P8₄–P8₇ and P9 have built-in programmable pull-up resistors. The pull-up resistors are valid only in the case that the each control bit is set to “1” and the corresponding port direction registers are set to input mode.

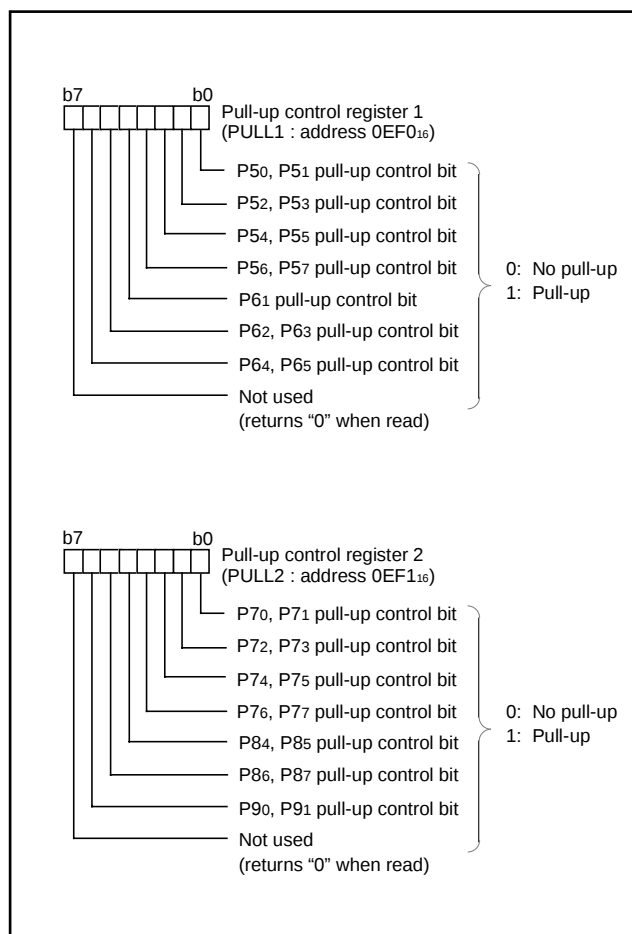


Fig. 10 Structure of pull-up control registers (PULL1 and PULL2)

Table 6 List of I/O port functions (1)

zPin	Name	Input/Output	I/O Format	Non-Port Function	Related SFRs	Ref.No.
P00/FLD8– P07/FLD15	Port P0	Input/output, individual bits	CMOS compatible input level High-breakdown voltage P- channel open-drain output with pull-down resistor	FLD automatic display function	FLDC mode register Port P0FLD/port switch register	(1)
P10/FLD16– P17/FLD23	Port P1	Output	High-breakdown voltage P- channel open-drain output with pull-down resistor		FLDC mode register	(2)
P20/BUZ02/ FLD0	Port P2	Input/output, individual bits	Low-voltage input level High-breakdown voltage P- channel open-drain output	Buzzer output (P20)	FLDC mode register	(3)
P21/FLD1– P27/FLD7				FLD automatic display function FLD automatic display function	Port P2FLD/port switch register Buzzer output control register	(1)
P30/FLD24– P37/FLD31	Port P3	Output	High-breakdown voltage P- channel open-drain output with pull-down resistor		FLDC mode register	(2)
P40/INT0, P41/INT1	Port P4	Input/output, individual bits	CMOS compatible input level N-channel open-drain output	External interrupt input In the mask option type P, INT3 cannot be used.	Interrupt edge selection register	(5)
P42/INT3						(7-1) (7-2)
P43/BUZ01				Buzzer output	Buzzer output control register	(4)
P44/PWM1				PWM output	Timer 56 mode register	(6)
P45/T1OUT				Timer output	Timer 12 mode register	(8-1)
P46/T3OUT				Timer output	Timer 34 mode register	(8-2)
P47/INT2		Input	CMOS compatible input level	External interrupt input	Interrupt edge selection register Interrupt interval determination control register	(9)
P50/SIN1	Port P5	Input/output, individual bits	CMOS compatible input level CMOS 3-state output	Serial I/O1 function I/O	Serial I/O1 control register 1, 2	(10)
P51/SOUT1, P52/SCLK11, P53/SCLK12						(11)
P54/RxD				Serial I/O2 function I/O	Serial I/O2 control register	(10)
P55/TxD, P56/SCLK21					UART control register	(11)
P57/SRDY2/ SCLK22						(12)
P60/CNTR1	Port P6		CMOS compatible input level N-channel open-drain output CMOS compatible input level CMOS 3-state output	External count input In the mask option type P, CNTR1 cannot be used.	Interrupt edge selection register	(7-1) (7-2) (13)
P61/CNTR0/ CNTR2						
P62/SRDY1/ AN8				Serial I/O1 function I/O A-D conversion input	Serial I/O1 control register 1, 2 A-D control register	(14)
P63/AN9				A-D conversion input Dimmer signal output	A-D control register P8FLD output control bit	(15)
P64/INT4/ SBUSY1/AN10				Serial I/O1 function I/O A-D conversion input External interrupt input	Serial I/O1 control register 1, 2 A-D control register Interrupt edge selection register	(16)
P65/SSTB1/ AN11				Serial I/O1 function I/O A-D conversion input	Serial I/O1 control register 1, 2 A-D control register	(17)
P70/AN0– P77/AN7	Port P7			A-D conversion input	A-D control register	(15)

Table 7 List of I/O port functions (2)


Pin	Name	Input/Output	I/O Format	Non-Port Function	Related SFRs	Ref.No.
P80/FLD32– P83/FLD35	Port P8	Input/output, individual bits	Low-voltage input level High-breakdown voltage P- channel open-drain output	FLD automatic display function	FLDC mode register Port P8FLD/port switch register	(1)
P84/FLD36			Low-voltage input level			(18)
P85/RTP0/ FLD37, P86/RTP1/ FLD38			CMOS 3-state output	FLD automatic display function Real time port output	FLDC mode register Port P8FLD/port switch register Timer X mode register 2	(19)
P87/PWM0/ FLD39				FLD automatic display function PWM output	FLDC mode register Port P8FLD/port switch register PWM control register	(20)
P90/XCIN	Port P9		CMOS compatible input level	Sub-clock generating circuit I/O	CPU mode register	(21)
P91/XCOUT			CMOS 3-state output			(22)

Notes 1 : Make sure that the input level at each pin is either 0 V or V_{CC} during execution of the STP instruction.


When an input level is at an intermediate potential, a current will flow from V_{CC} to V_{SS} through the input-stage gate.

2 : How to use double-function ports as function I/O ports, refer to the applicable sections.


(1) Ports P0, P21–P27, P80–P83

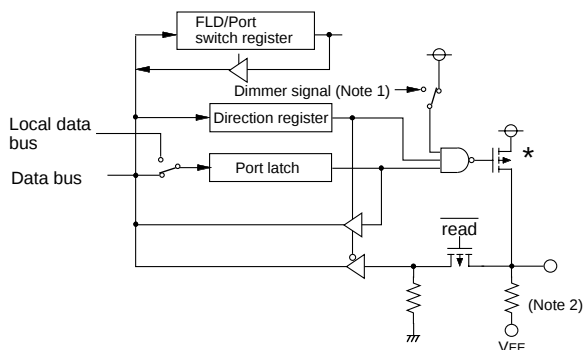


(2) Ports P1, P3

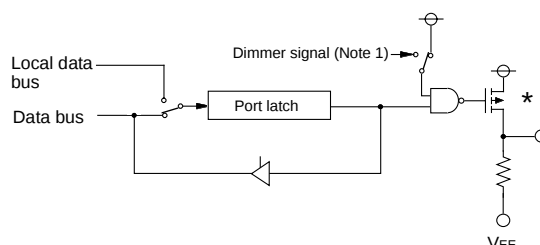


(3) Port P20

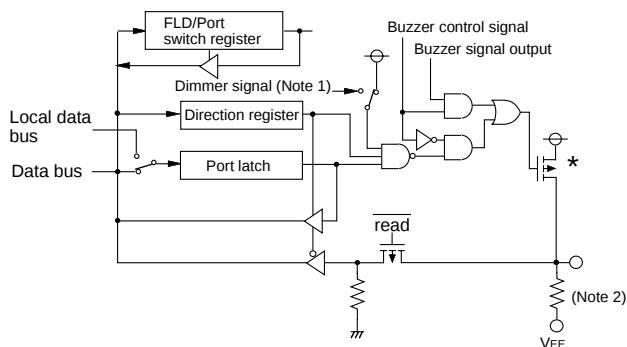


(4) Port P43

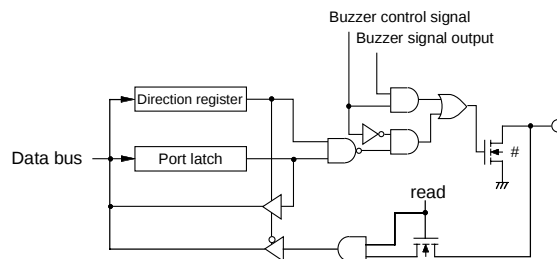

(5) Ports P40, P41

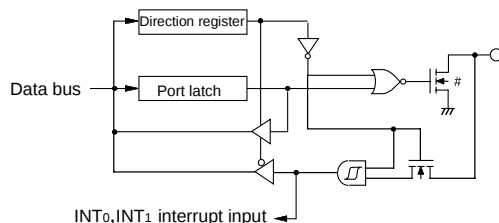

(6) Port P44

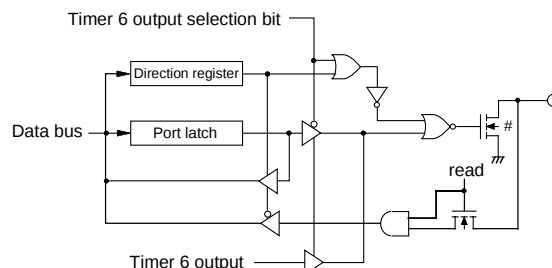

* High-breakdown-voltage P-channel transistor


Middle-breakdown-voltage N-channel transistor

Notes 1: The dimmer signal sets the Toff timing.


2: A pull-down resistor is not built in to ports P2 and P8.

Fig. 11 Port block diagram (1)


(7-1) Ports P42, P60

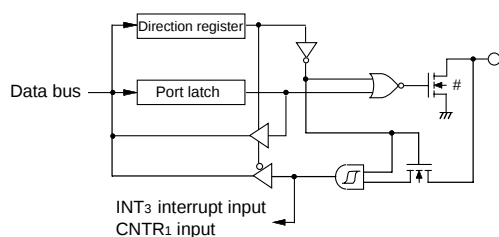


(7-2) Ports P42, P60 (mask option type P)

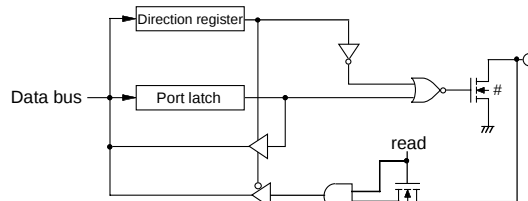


(8-1) Ports P45, P46

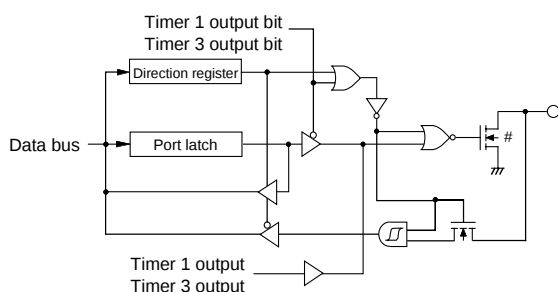


(8-2) Ports P45, P46 (mask option type P)

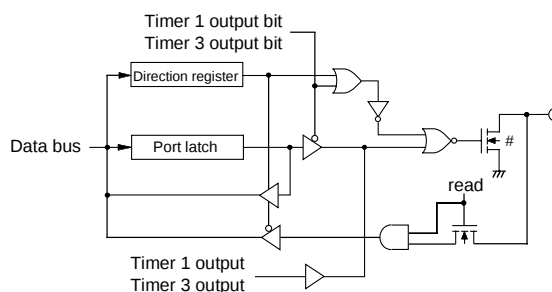

(9) Port P47

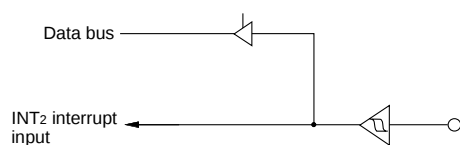


(10) Ports P50, P54

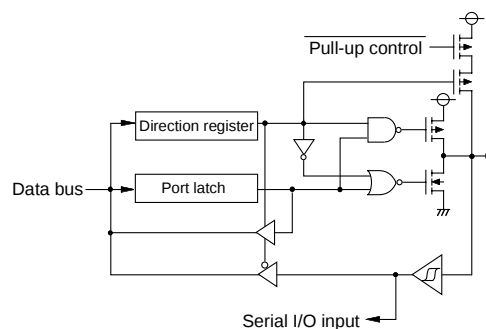


Middle-breakdown-voltage N-channel transistor

Fig. 12 Port block diagram (2)


(17) Port P65

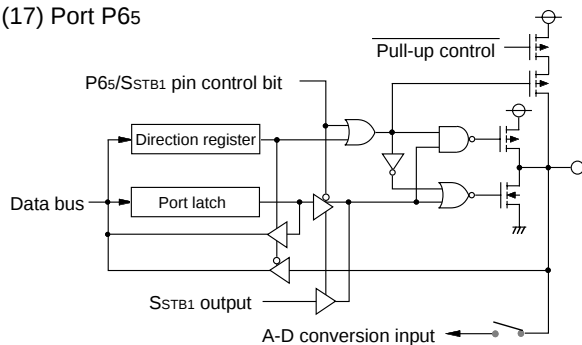


(18) Port P84

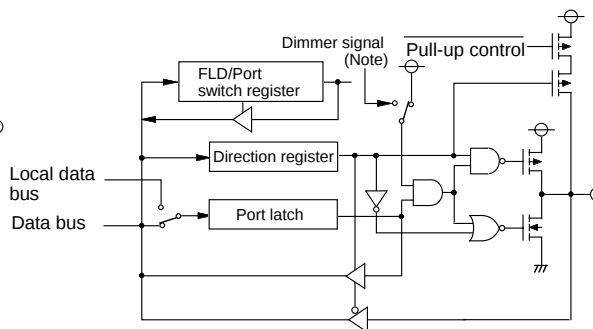


(19) Ports P85, P86

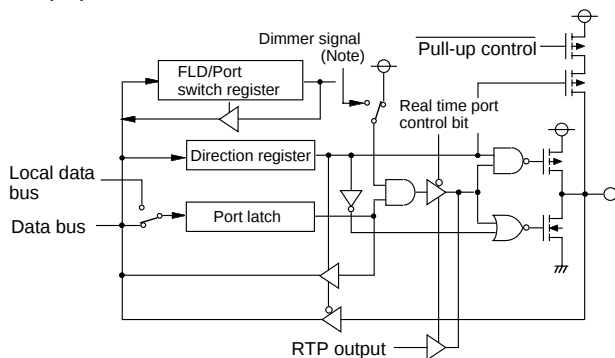


(20) Port P87

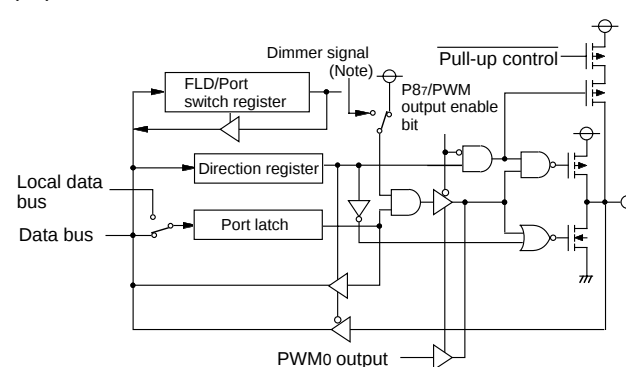

(21) Port P90

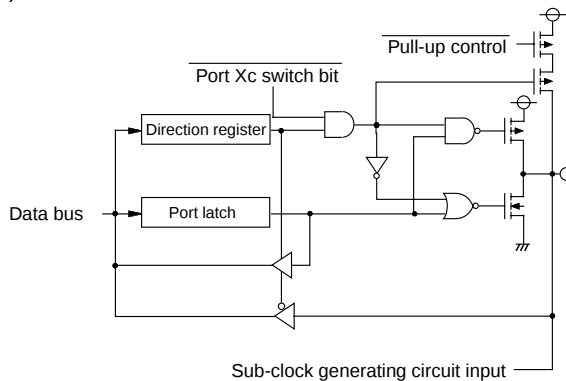

(22) Port P91

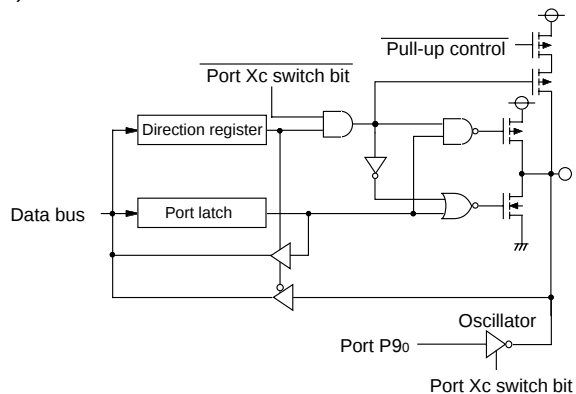

* High-breakdown-voltage P-channel transistor

Note: The dimmer signal sets the Toff timing.

Fig. 14 Port block diagram (4)

INTERRUPTS

Interrupts occur by twenty one sources: five external, fifteen internal, and one software.

Interrupt Control

Each interrupt except the BRK instruction interrupt have both an interrupt request bit and an interrupt enable bit, and is controlled by the interrupt disable flag. An interrupt occurs if the corresponding interrupt request and enable bits are "1" and the interrupt disable flag is "0". Interrupt enable bits can be set or cleared by software. Interrupt request bits can be cleared by software, but cannot be set by software. The BRK instruction interrupt and reset cannot be disabled with any flag or bit. The I flag disables all interrupts except the BRK instruction interrupt and reset. If several interrupts requests occurs at the same time the interrupt with highest priority is accepted first.

Interrupt Operation

Upon acceptance of an interrupt the following operations are automatically performed:

1. The contents of the program counter and processor status register are automatically pushed onto the stack.
2. The interrupt disable flag is set and the corresponding interrupt request bit is cleared.
3. The interrupt jump destination address is read from the vector table into the program counter.

■Notes on Use

When the active edge of an external interrupt (INT0–INT4) is set or when switching interrupt sources in the same vector address, the corresponding interrupt request bit may also be set. Therefore, please take following sequence:

- (1) Disable the external interrupt which is selected.
- (2) Change the active edge in interrupt edge selection register
- (3) Clear the set interrupt request bit to "0".
- (4) Enable the external interrupt which is selected.

Table 8 Interrupt vector addresses and priority

Interrupt Source	Priority	Vector Addresses (Note 1)		Interrupt Request Generating Conditions	Remarks
		High	Low		
Reset (Note 2)	1	FFFD ₁₆	FFFC ₁₆	At reset	Non-maskable
INT ₀	2	FFFB ₁₆	FFFA ₁₆	At detection of either rising or falling edge of INT ₀ input	External interrupt (active edge selectable)
INT ₁	3	FFF9 ₁₆	FFF8 ₁₆	At detection of either rising or falling edge of INT ₁ input	External interrupt (active edge selectable)
INT ₂	4	FFF7 ₁₆	FFF6 ₁₆	At detection of either rising or falling edge of INT ₂ input	External interrupt (active edge selectable)
Remote control/ counter overflow				At 8-bit counter overflow	Valid when interrupt interval determination is operating
Serial I/O1	5	FFF5 ₁₆	FFF4 ₁₆	At completion of data transfer	Valid when serial I/O ordinary mode is selected
Serial I/O auto- automatic transfer				At completion of the last data transfer	Valid when serial I/O automatic transfer mode is selected
Timer X	6	FFF3 ₁₆	FFF2 ₁₆	At timer X underflow	
Timer 1	7	FFF1 ₁₆	FFF0 ₁₆	At timer 1 underflow	
Timer 2	8	FFEF ₁₆	FFEE ₁₆	At timer 2 underflow	STP release timer underflow
Timer 3	9	FFED ₁₆	FFEC ₁₆	At timer 3 underflow	
Timer 4	10	FFEB ₁₆	FFEA ₁₆	At timer 4 underflow	(Note 3)
Timer 5	11	FFE9 ₁₆	FFE8 ₁₆	At timer 5 underflow	
Timer 6	12	FFE7 ₁₆	FFE6 ₁₆	At timer 6 underflow	
Serial I/O2 receive	13	FFE5 ₁₆	FFE4 ₁₆	At completion of serial I/O2 data receive	
INT ₃	14	FFE3 ₁₆	FFE2 ₁₆	At detection of either rising or falling edge of INT ₃ input	External interrupt (Note 4) (active edge selectable)
Serial I/O2 transmit				At completion of serial I/O2 data transmit	
INT ₄	15	FFE1 ₁₆	FFE0 ₁₆	At detection of either rising or falling edge of INT ₄ input	External interrupt (active edge selectable) Valid when INT ₄ interrupt is selected
A-D conversion				At completion of A-D conversion	Valid when A-D conversion is selected
FLD blanking	16	FFDF ₁₆	FFDE ₁₆	At falling edge of the last timing immediately before blanking period starts	Valid when FLD blanking interrupt is selected
FLD digit				At rising edge of digit (each timing)	Valid when FLD digit interrupt is selected
BRK instruction	17	FFDD ₁₆	FFDC ₁₆	At BRK instruction execution	Non-maskable software interrupt

Notes 1 : Vector addresses contain interrupt jump destination addresses.

2 : Reset function in the same way as an interrupt with the highest priority.

3 : In the mask option type P, timer 4 interrupt whose count source is CNTR₁ input cannot be used.

4 : In the mask option type P, INT₃ interrupt cannot be used.


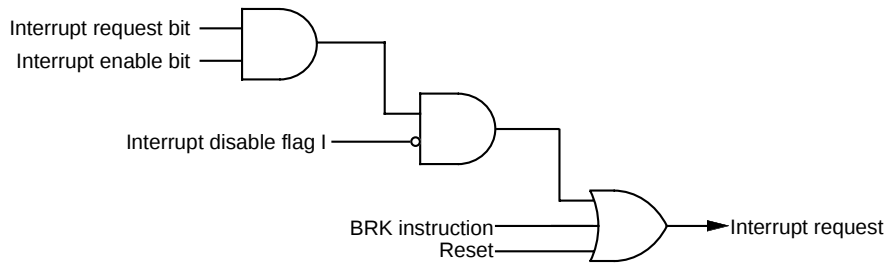


Fig. 15 Interrupt control

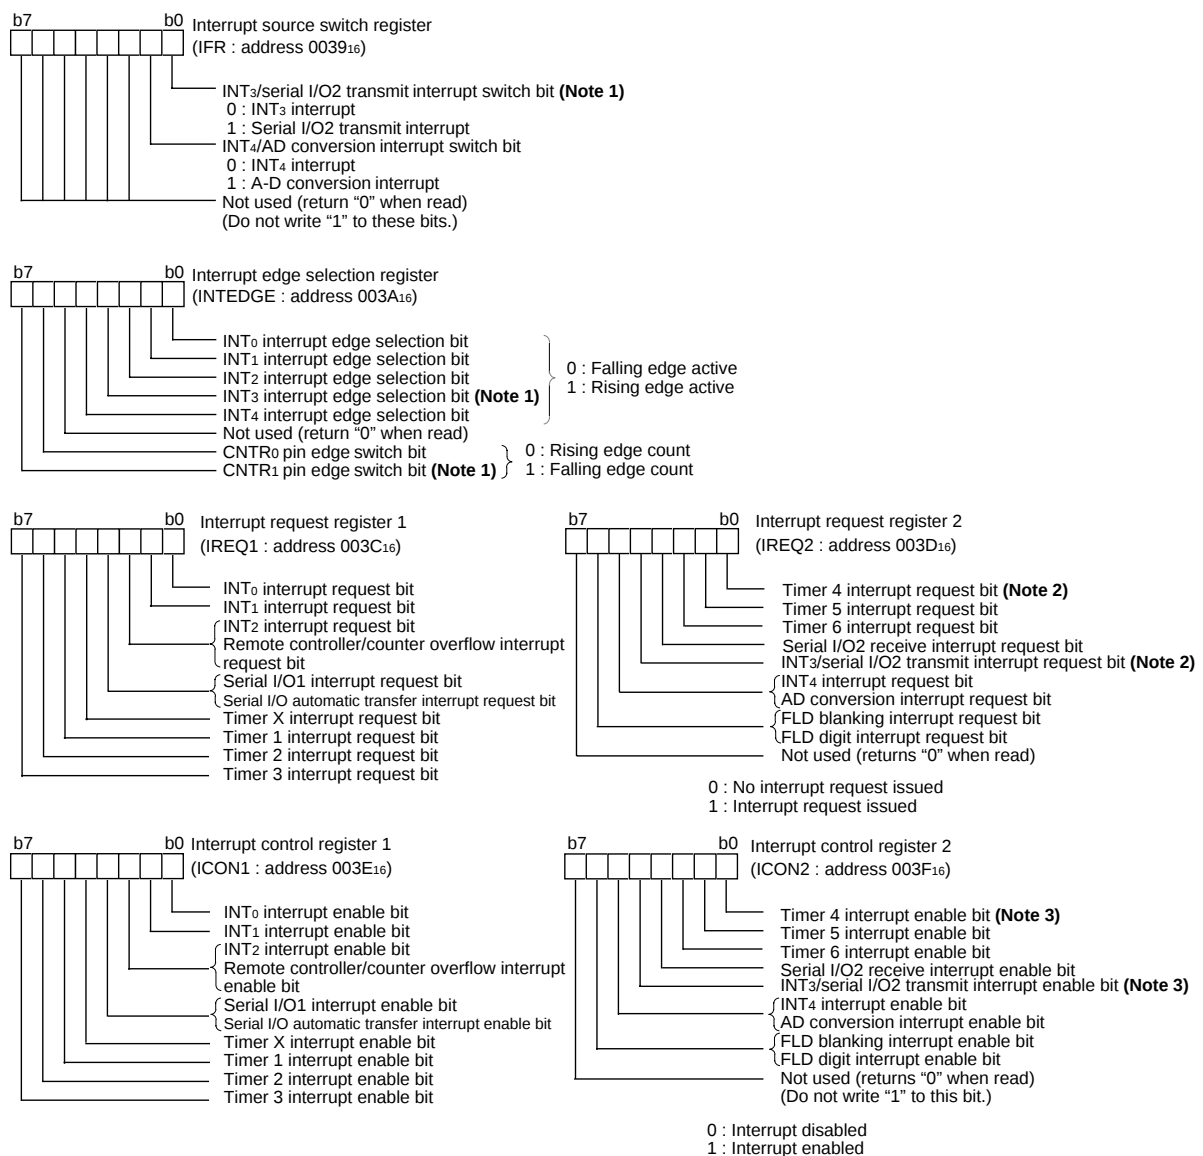

Notes 1: In the mask option type P, these bits are not available because CNTR1 function and INT3 function cannot be used.
2: In the mask option type P, if timer 4 interrupt whose count source is CNTR1 input and INT3 interrupt are selected, these bits do not become "1".
3: In the mask option type P, timer 4 interrupt whose count source is CNTR1 input and INT3 interrupt are not available.

Fig. 16 Structure of interrupt related registers

TIMERS

8-Bit Timer

The 38B4 group has six built-in timers : Timer 1, Timer 2, Timer 3, Timer 4, Timer 5, and Timer 6.

Each timer has the 8-bit timer latch. All timers are down-counters. When the timer reaches "00₁₆", an underflow occurs with the next count pulse. Then the contents of the timer latch is reloaded into the timer and the timer continues down-counting. When a timer underflows, the interrupt request bit corresponding to that timer is set to "1".

The count can be stopped by setting the stop bit of each timer to "1". The internal system clock can be set to either the high-speed mode or low-speed mode with the CPU mode register. At the same time, timer internal count source is switched to either $f(X_{IN})$ or $f(X_{CIN})$.

●Timer 1, Timer 2

The count sources of timer 1 and timer 2 can be selected by setting the timer 12 mode register. A rectangular waveform of timer 1 underflow signal divided by 2 can be output from the P4₅/T1_{OUT} pin. The active edge of the external clock CNTR₀ can be switched with the bit 6 of the interrupt edge selection register.

At reset or when executing the STP instruction, all bits of the timer 12 mode register are cleared to "0", timer 1 is set to "FF₁₆", and timer 2 is set to "01₁₆".

●Timer 3, Timer 4

The count sources of timer 3 and timer 4 can be selected by setting the timer 34 mode register. A rectangular waveform of timer 3 underflow signal divided by 2 can be output from the P4₆/T3_{OUT} pin. The active edge of the external clock CNTR₁ (**Note**) can be switched with the bit 7 of the interrupt edge selection register.

Note: In the mask option type P, CNTR₁ function cannot be used.

●Timer 5, Timer 6

The count sources of timer 5 and timer 6 can be selected by setting the timer 56 mode register. A rectangular waveform of timer 6 underflow signal divided by 2 can be output from the P4₄/PWM₁ pin.

(1) Timer 6 PWM₁ mode

Timer 6 can output a PWM rectangular waveform with "H" duty cycle $n/(n+m)$ from the P4₄/PWM₁ pin by setting the timer 56 mode register (refer to Figure 19). The n is the value set in timer 6 latch (address 0025₁₆) and m is the value in the timer 6 PWM register (address 0027₁₆). If n is "0", the PWM output is "L", if m is "0", the PWM output is "H" ($n = 0$ is prior than $m = 0$). In the PWM mode, interrupts occur at the rising edge of the PWM output.

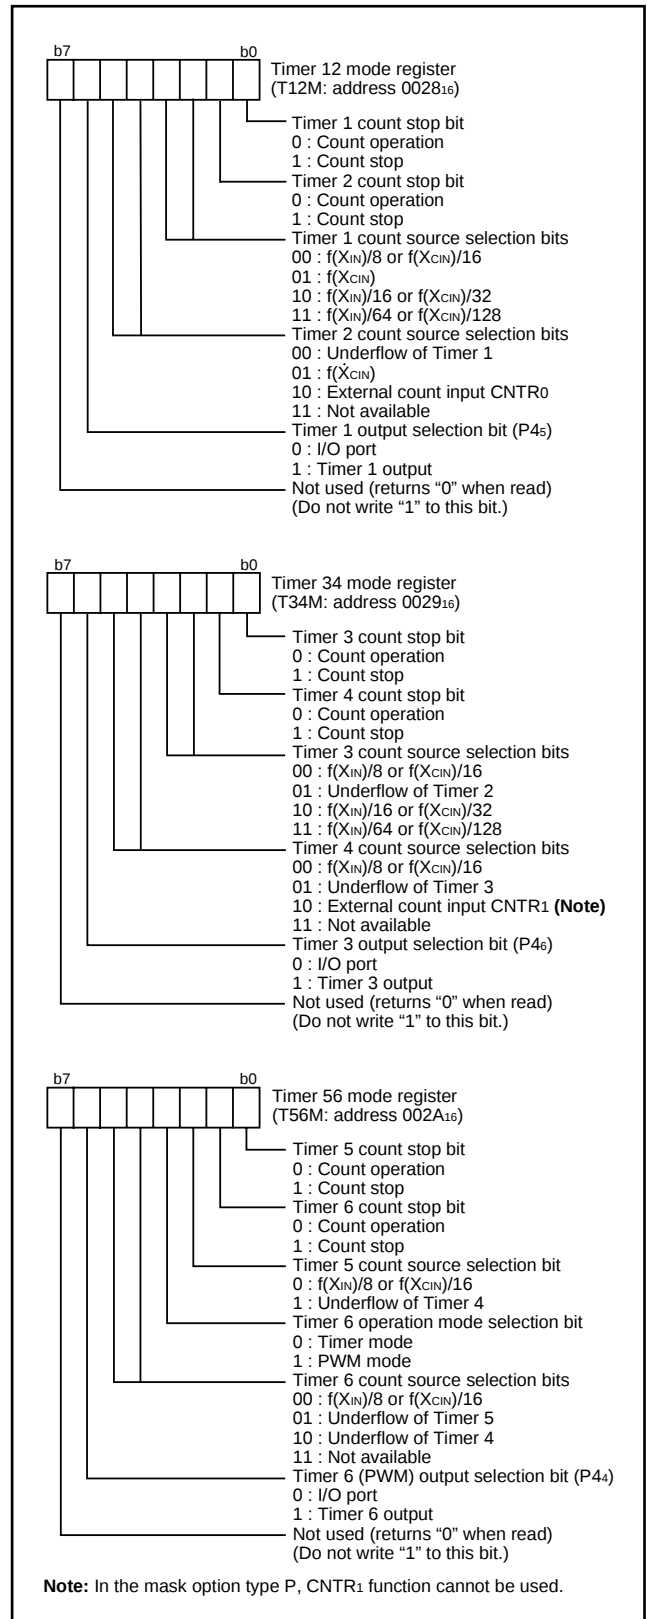


Fig. 17 Structure of timer related register

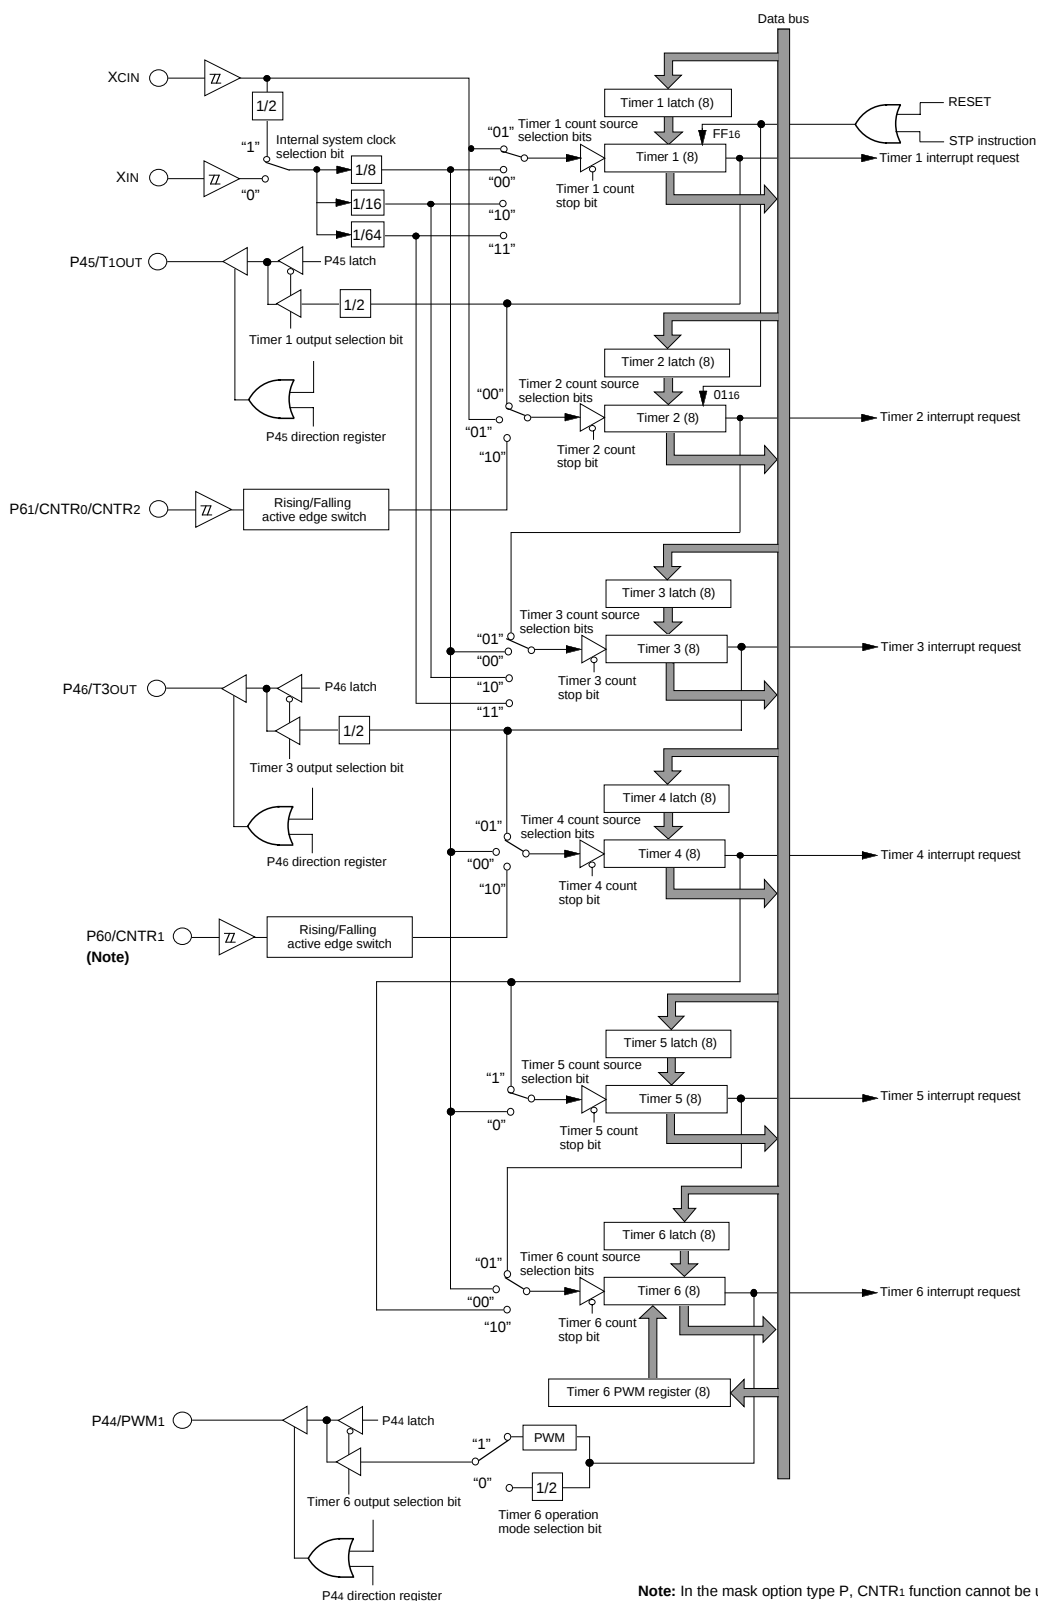


Fig. 18 Block diagram of timer

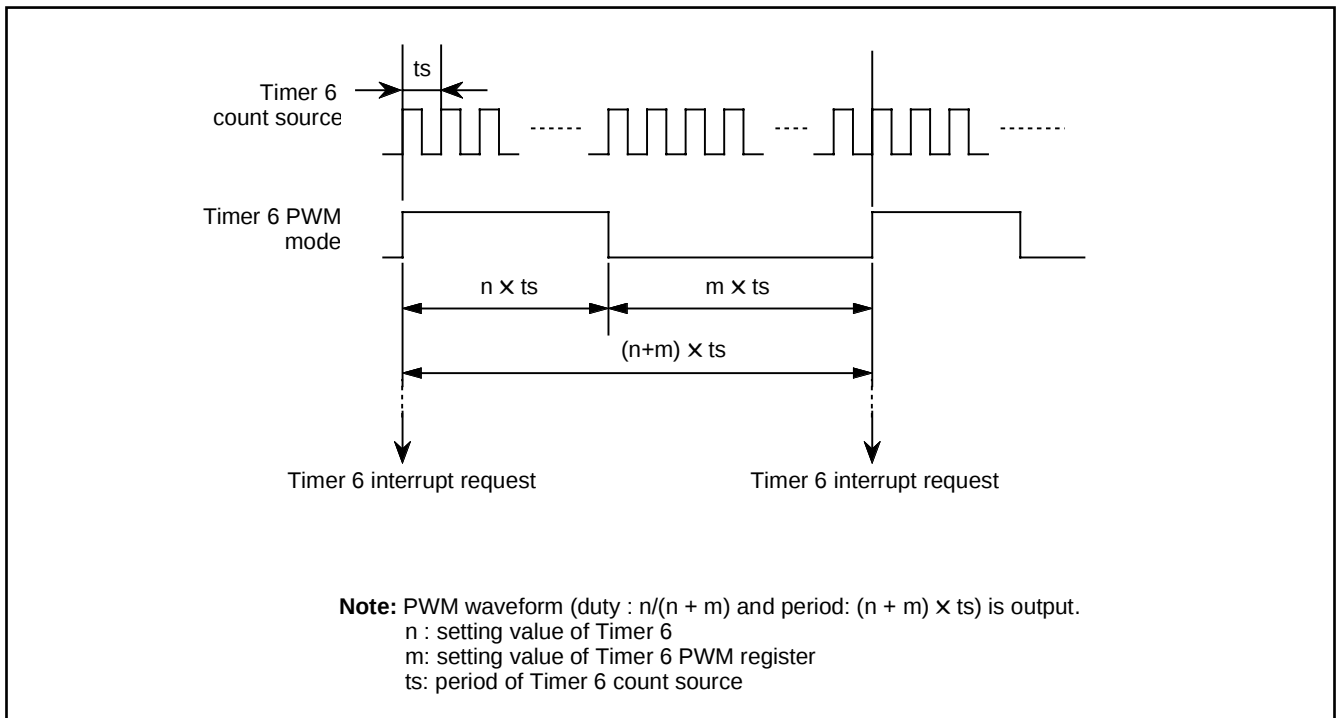


Fig. 19 Timing chart of timer 6 PWM₁ mode

16-Bit Timer

Timer X is a 16-bit timer that can be selected in one of four modes by the Timer X mode registers 1, 2 and can be controlled the timer X write and the real time port by setting the timer X mode registers. Read and write operation on 16-bit timer must be performed for both high- and low-order bytes. When reading a 16-bit timer, read from the high-order byte first. When writing to 16-bit timer, write to the low-order byte first. The 16-bit timer cannot perform the correct operation when reading during write operation, or when writing during read operation.

●Timer X

Timer X is a down-counter. When the timer reaches "0000₁₆", an underflow occurs with the next count pulse. Then the contents of the timer latch is reloaded into the timer and the timer continues down-counting. When a timer underflows, the interrupt request bit corresponding to that timer is set to "1".

(1) Timer mode

A count source can be selected by setting the Timer X count source selection bits (bits 1 and 2) of the Timer X mode register 1.

(2) Pulse output mode

Each time the timer underflows, a signal output from the CNTR₂ pin is inverted. Except for this, the operation in pulse output mode is the same as in timer mode. When using a timer in this mode, set the port shared with the CNTR₂ pin to output.

(3) Event counter mode

The timer counts signals input through the CNTR₂ pin. Except for this, the operation in event counter mode is the same as in timer mode. When using a timer in this mode, set the port shared with the CNTR₂ pin to input.

(4) Pulse width measurement mode

A count source can be selected by setting the Timer X count source selection bits (bits 1 and 2) of the Timer X mode register 1. When CNTR₂ active edge switch bit is "0", the timer counts while the input signal of the CNTR₂ pin is at "H". When it is "1", the timer counts while the input signal of the CNTR₂ pin is at "L". When using a timer in this mode, set the port shared with the CNTR₂ pin to input.

■ Note

•Timer X Write Control

If the timer X write control bit is "0", when the value is written in the address of timer X, the value is loaded in the timer X and the latch at the same time.

If the timer X write control bit is "1", when the value is written in the address of timer X, the value is loaded only in the latch. The value in the latch is loaded in timer X after timer X underflows.

When the value is written in latch only, unexpected value may be set in the high-order counter if the writing in high-order latch and the underflow of timer X are performed at the same timing.

•Real Time Port Control

While the real time port function is valid, data for the real time port are output from ports P8₅ and P8₆ each time the timer X underflows. (However, if the real time port control bit is changed from "0" to "1", data are output without the timer X.) When the data for the real time port is changed while the real time port function is valid, the changed data are output at the next underflow of timer X.

Before using this function, set the corresponding port direction registers to output mode.

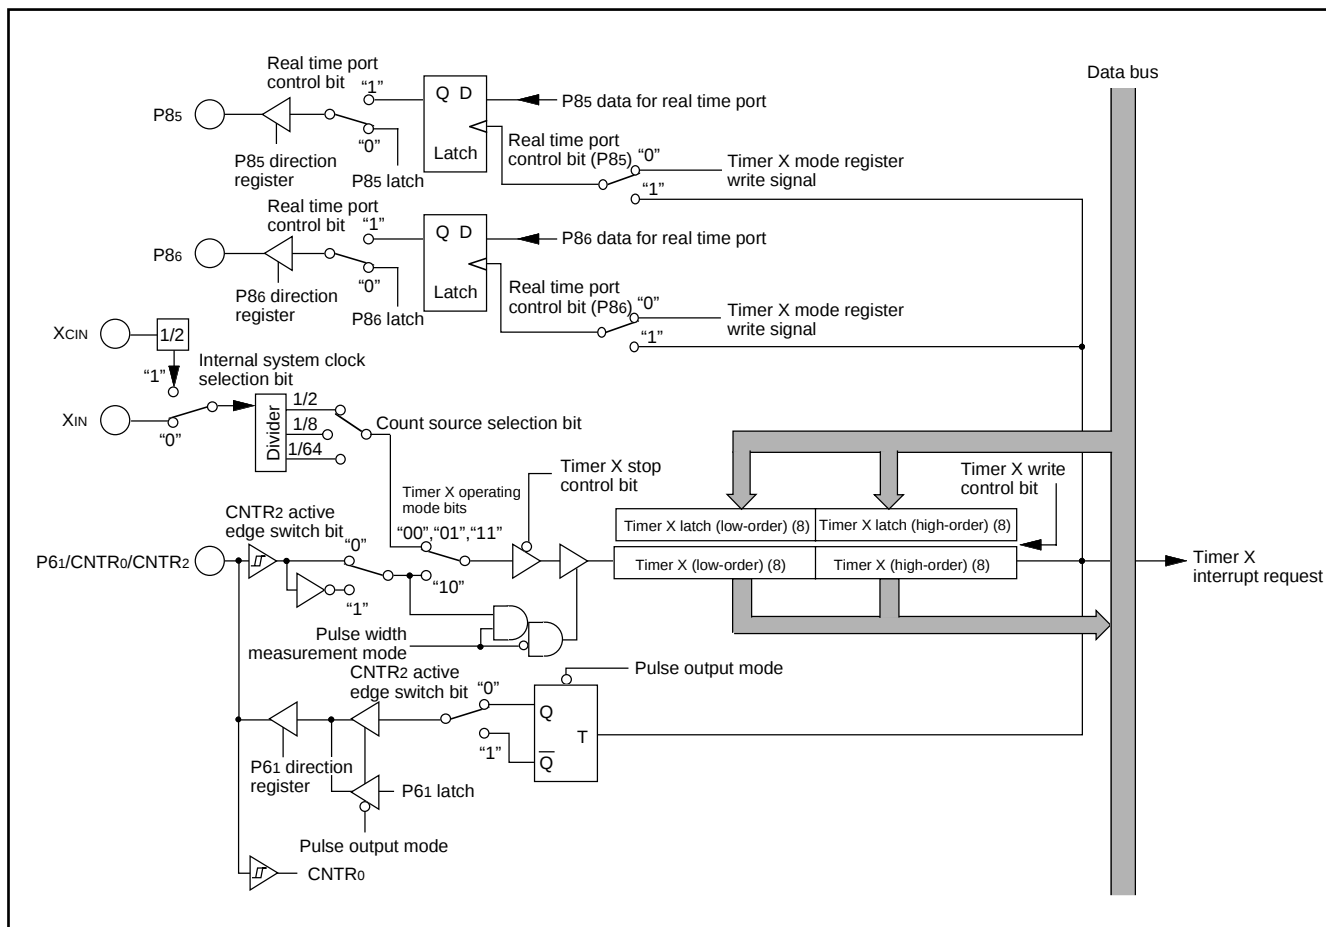


Fig. 20 Block diagram of timer X

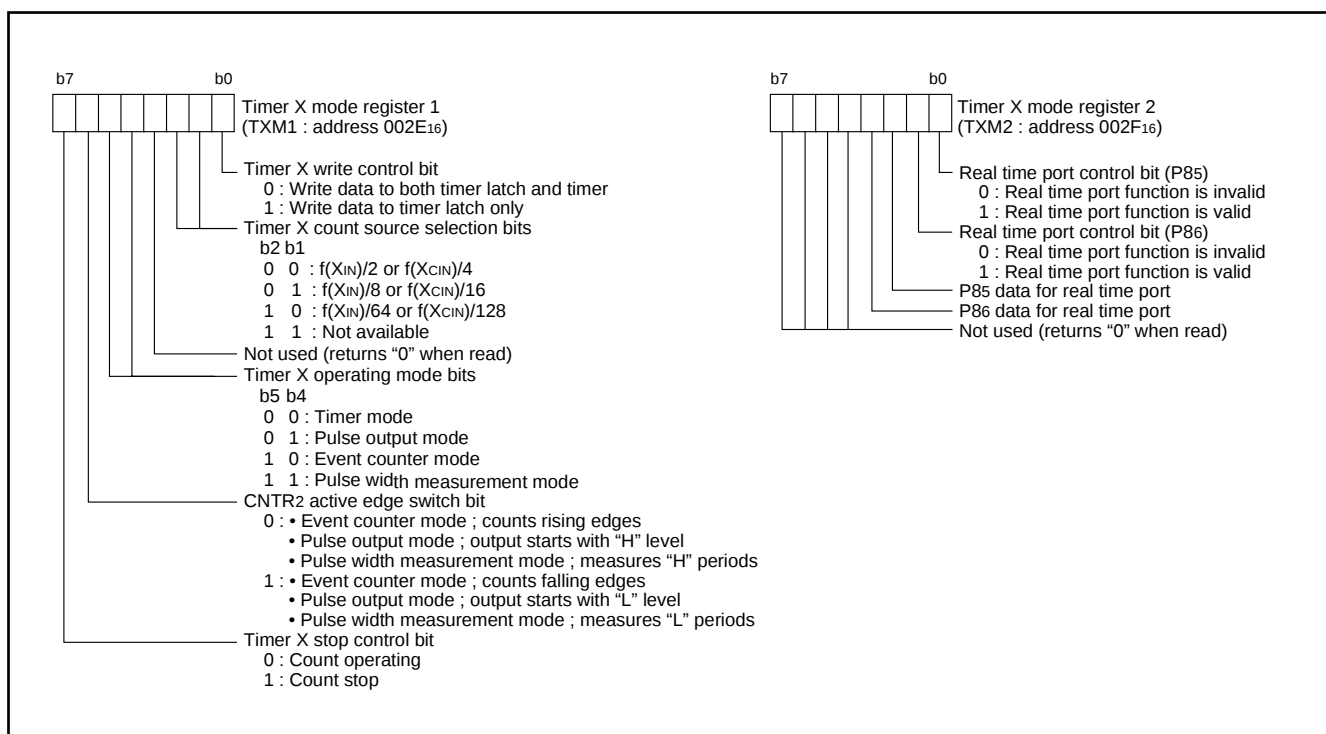


Fig. 21 Structure of timer X related registers

SERIAL I/O

Serial I/O1

Serial I/O1 is used as the clock synchronous serial I/O and has an ordinary mode and an automatic transfer mode. In the automatic transfer mode, serial transfer is performed through the serial I/O automatic transfer RAM which has up to 256 bytes (addresses 0F00₁₆ to 0FFF₁₆: addresses 0F60₁₆ to 0FFF₁₆ are also used as

FLD automatic display RAM).

The P62/SRDY1/AN8, P64/INT4/SBUSY1/AN10, and P65/SSTB1/AN11 pins each have a handshake I/O signal function and can select either "H" active or "L" active for active logic.

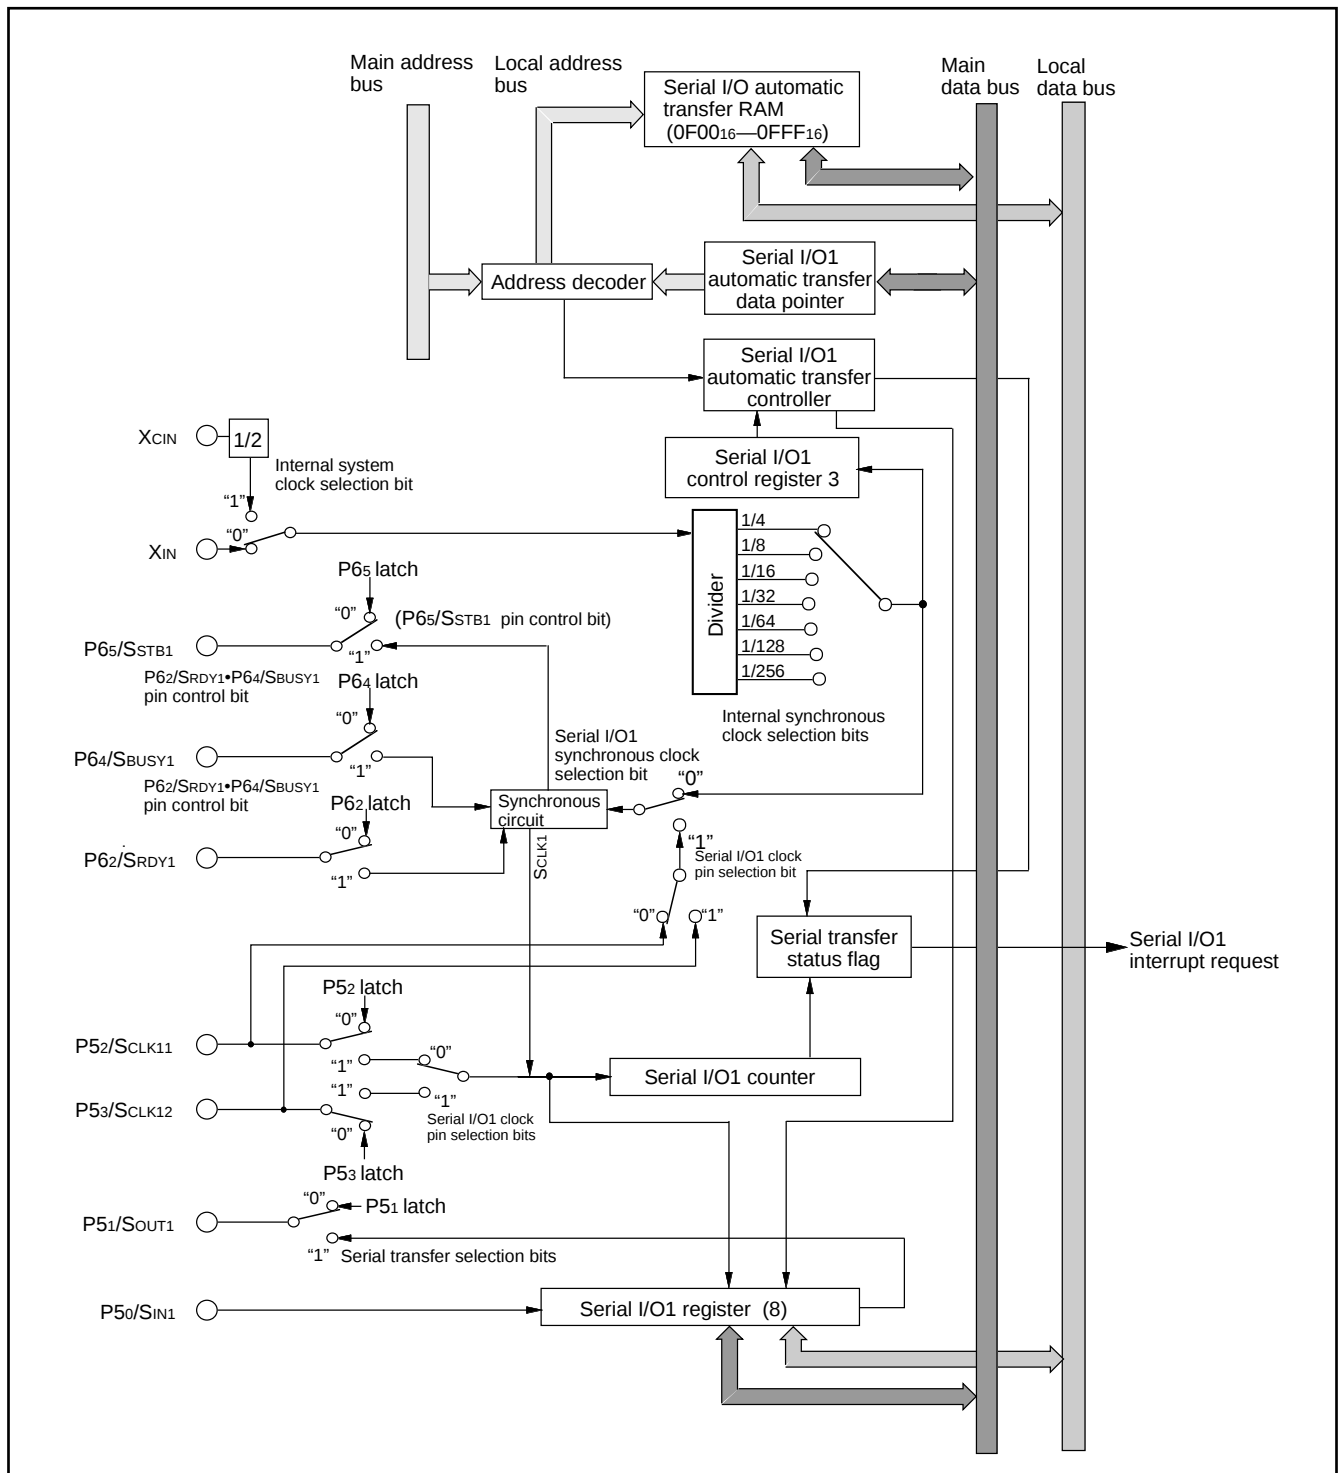


Fig. 22 Block diagram of serial I/O1

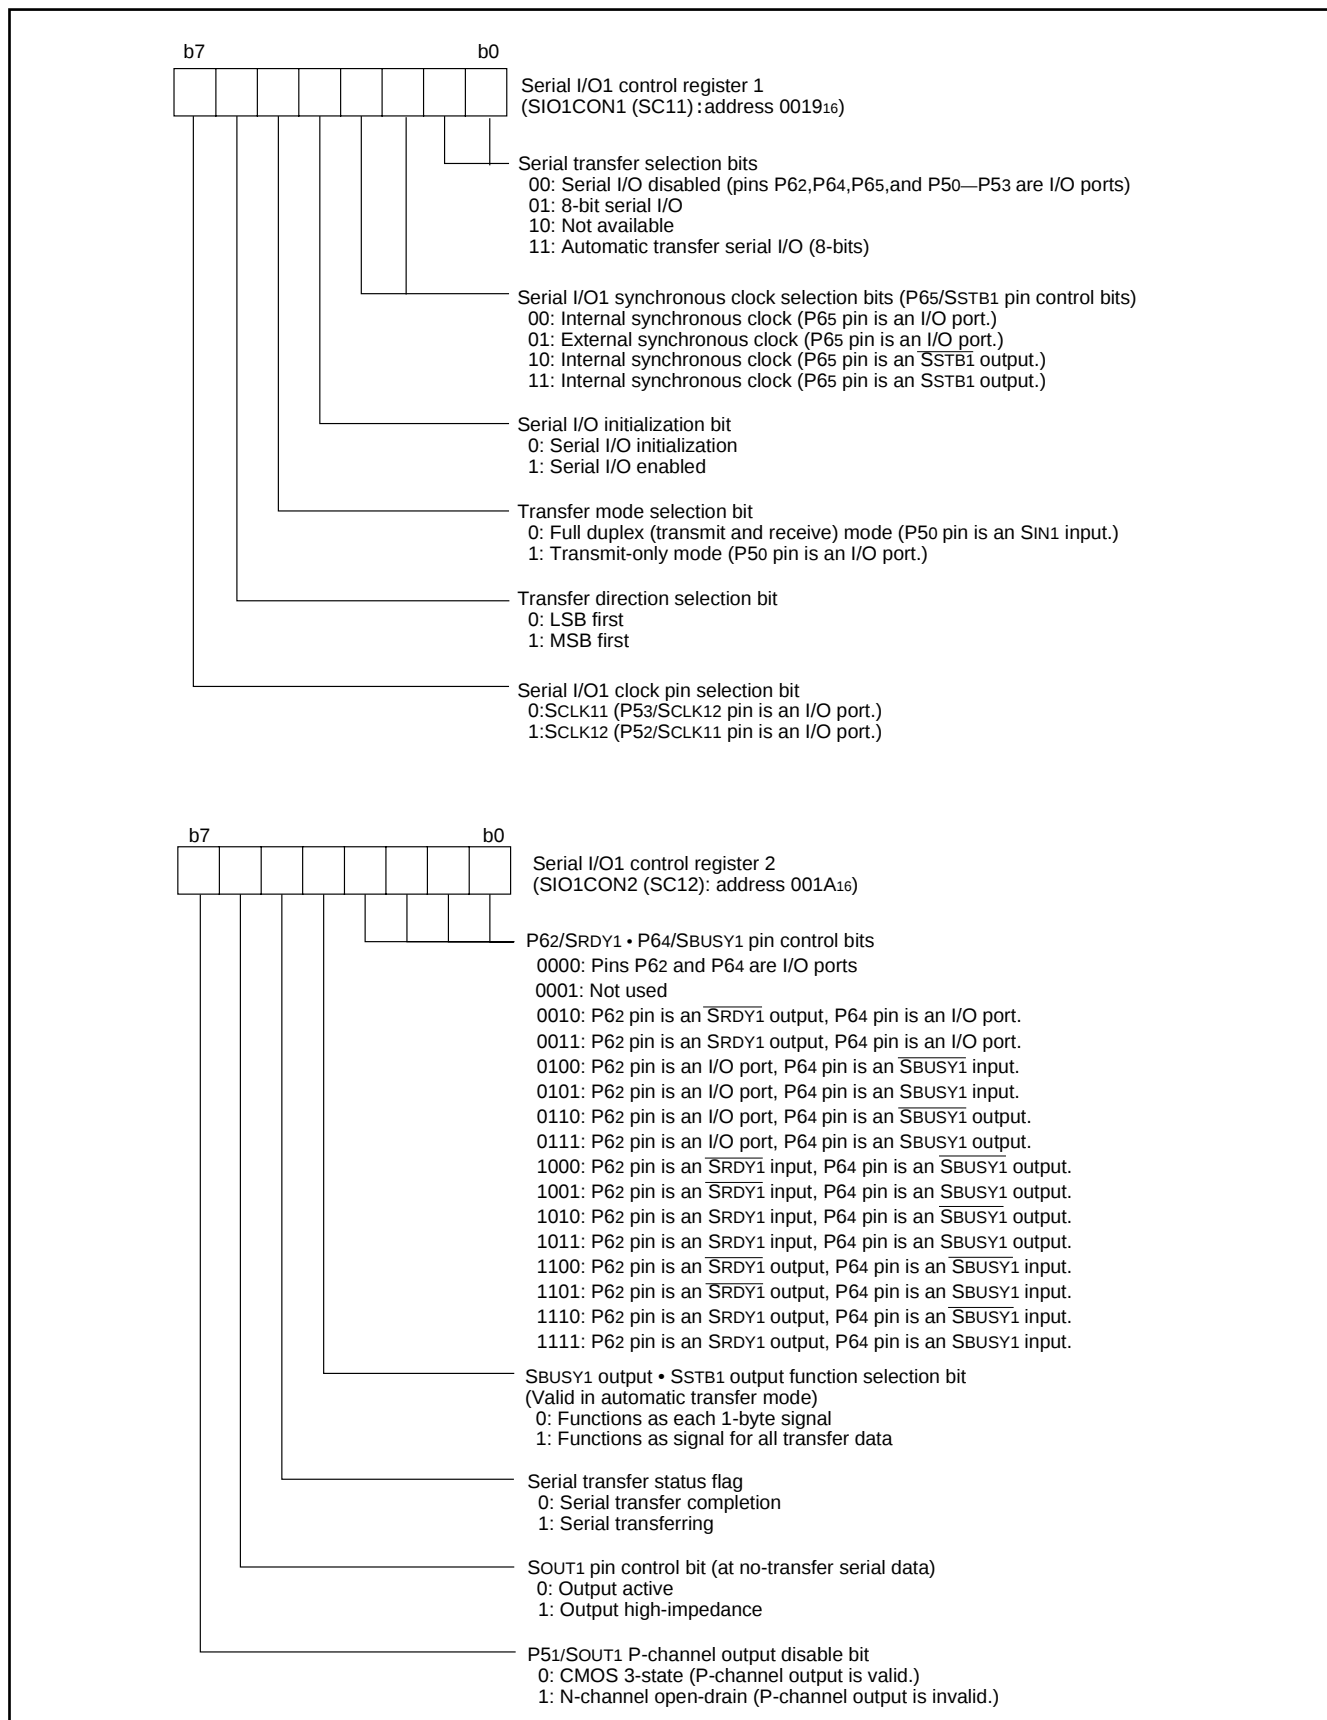


Fig. 23 Structure of serial I/O1 control registers 1, 2

●Serial I/O1 operation

Either the internal synchronous clock or external synchronous clock can be selected by the serial I/O1 synchronous clock selection bits (b2 and b3 of address 0019₁₆) of serial I/O1 control register 1 as synchronous clock for serial transfer.

The internal synchronous clock has a built-in dedicated divider where 7 different clocks are selected by the internal synchronous clock selection bits (b5, b6 and b7 of address 001C₁₆) of serial I/O1 control register 3.

The P62/SRDY1/AN8, P64/INT4/SBUSY1/AN10, and P65/SSTB1/AN11 pins each select either I/O port or handshake I/O signal by the serial I/O1 synchronous clock selection bits (b2 and b3 of address 0019₁₆) of serial I/O1 control register 1 as well as the P62/SRDY1 • P64/SBUSY1 pin control bits (b0 to b3 of address 001A₁₆) of serial I/O1 control register 2.

For the SOUT1 being used as an output pin, either CMOS output or N-channel open-drain output is selected by the P51/SOUT1 P-channel output disable bit (b7 of address 001A₁₆) of serial I/O1 control register 2.

Either output active or high-impedance can be selected as a SOUT1 pin state at serial non-transfer by the SOUT1 pin control bit (b6 of address 001A₁₆) of serial I/O1 control register 2. However, when the external synchronous clock is selected, perform the following setup to put the SOUT1 pin into a high-impedance state.

When the SCLK1 input is "H" after completion of transfer, set the SOUT1 pin control bit to "1".

When the SCLK1 input goes to "L" after the start of the next serial transfer, the SOUT1 pin control bit is automatically reset to "0" and put into an output active state.

Regardless of whether the internal synchronous clock or external synchronous clock is selected, the full duplex mode and the transmit-only mode are available for serial transfer, one of which is selected by the transfer mode selection bit (b5 of address 0019₁₆) of serial I/O1 control register 1.

Either LSB first or MSB first is selected for the I/O sequence of the serial transfer bit strings by the transfer direction selection bit (b6 of address 0019₁₆) of serial I/O1 control register 1.

When using serial I/O1, first select either 8-bit serial I/O or automatic transfer serial I/O by the serial transfer selection bits (b0 and b1 of address 0019₁₆) of serial I/O1 control register 1, after completion of the above bit setup. Next, set the serial I/O initialization bit (b4 of address 0019₁₆) of serial I/O1 control register 1 to "1" (Serial I/O enable) .

When stopping serial transfer while data is being transferred, regardless of whether the internal or external synchronous clock is selected, reset the serial I/O initialization bit (b4) to "0".

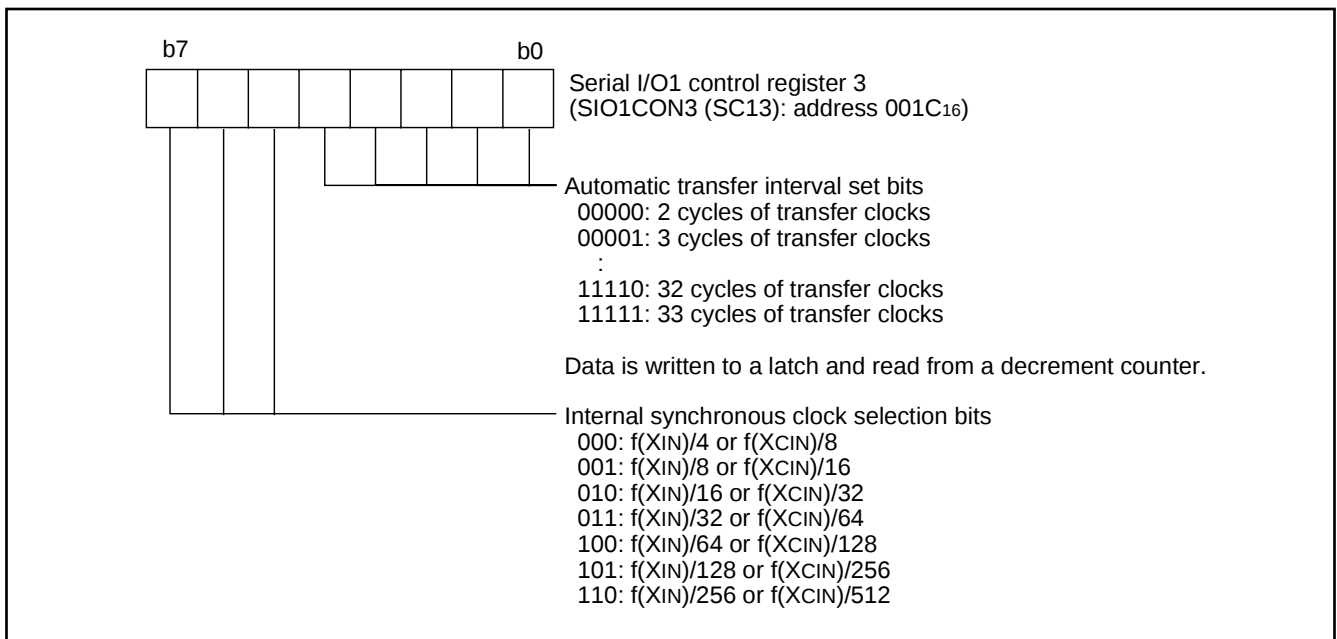


Fig. 24 Structure of serial I/O1 control register 3

(1) 8-bit serial I/O mode

Address 001B₁₆ is assigned to the serial I/O1 register.

When the internal synchronous clock is selected, a serial transfer of the 8-bit serial I/O is started by a write signal to the serial I/O1 register (address 001B₁₆).

The serial transfer status flag (b5 of address 001A₁₆) of serial I/O1 control register 2 indicates the shift register status of serial I/O1, and is set to "1" by writing into the serial I/O1 register, which becomes a transfer start trigger and reset to "0" after completion of 8-bit transfer. At the same time, a serial I/O1 interrupt request occurs. When the external synchronous clock is selected, the contents of the serial I/O1 register are continuously shifted while transfer clocks are input to SCLK₁. Therefore, the clock needs to be controlled externally.

(2) Automatic transfer serial I/O mode

The serial I/O1 automatic transfer controller controls the write and read operations of the serial I/O1 register, so the function of address 001B₁₆ is used as a transfer counter (1-byte units).

When performing serial transfer through the serial I/O automatic transfer RAM (addresses 0F00₁₆ to 0FFF₁₆), it is necessary to set the serial I/O1 automatic transfer data pointer (address 0018₁₆) beforehand.

Input the low-order 8 bits of the first data store address to be serially transferred to the automatic transfer data pointer set bits.

When the internal synchronous clock is selected, the transfer interval for each 1-byte data can be set by the automatic transfer interval set bits (b0 to b4 of address 001C₁₆) of serial I/O1 control register 3 in the following cases:

1. When using no handshake signal
2. When using the SRDY₁ output, S_{BSY}₁ output, and S_{STB}₁ output of the handshake signal independently
3. When using a combination of SRDY₁ output and S_{STB}₁ output or a combination of S_{BSY}₁ output and S_{STB}₁ output of the handshake signal

It is possible to select one of 32 different values, namely 2 to 33 cycles of the transfer clock, as a setting value.

When using the S_{BSY}₁ output and selecting the S_{BSY}₁ output • S_{STB}₁ output function selection bit (b4 of address 001A₁₆) of serial I/O1 control register 2 as the signal for all transfer data, provided

that the automatic transfer interval setting is valid, a transfer interval is placed before the start of transmission/reception of the first data and after the end of transmission/reception of the last data.

For S_{STB}₁ output, regardless of the contents of the S_{BSY}₁ output • S_{STB}₁ output function selection bit (b4), the transfer interval for each 1-byte data is longer than the set value by 2 cycles.

Furthermore, when using a combination of S_{BSY}₁ output and S_{STB}₁ output as a signal for all transfer data, the transfer interval after the end of transmission/reception of the last data is longer than the set value by 2 cycles.

When the external synchronous clock is selected, automatic transfer interval setting is disabled.

After completion of the above bit setup, if the internal synchronous clock is selected, automatic serial transfer is started by writing the value of "number of transfer bytes - 1" into the transfer counter (address 001B₁₆).

When the external synchronous clock is selected, write the value of "number of transfer bytes - 1" into the transfer counter and input an internal system clock interval of 5 cycles or more. After that, input transfer clock to SCLK₁.

As a transfer interval for each 1-byte data transfer, input an internal system clock interval of 5 cycles or more from the clock rise time of the last bit.

Regardless of whether the internal or external synchronous clock is selected, the automatic transfer data pointer and the transfer counter are decremented after each 1-byte data is received and then written into the automatic transfer RAM. The serial transfer status flag (b5 of address 001A₁₆) is set to "1" by writing data into the transfer counter. Writing data becomes a transfer start trigger, and the serial transfer status flag is reset to "0" after the last data is written into the automatic transfer RAM. At the same time, a serial I/O1 interrupt request occurs.

The values written in the automatic transfer data pointer set bits (b0 to b7 of address 0018₁₆) and the automatic transfer interval set bits (b0 to b4 of address 001C₁₆) are held in the latch.

When data is written into the transfer counter, the values latched in the automatic transfer data pointer set bits (b0 to b7) and the automatic transfer interval set bits (b0 to b4) are transferred to the decrement counter.

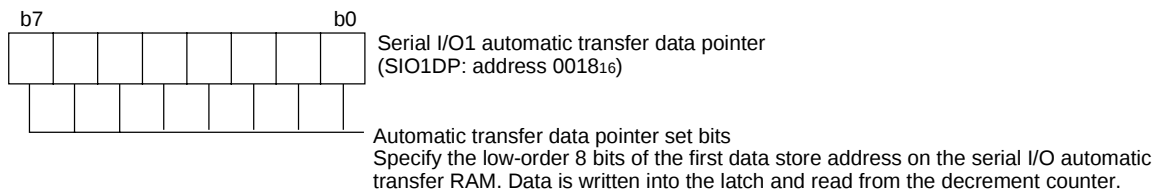


Fig. 25 Structure of serial I/O1 automatic transfer data pointer

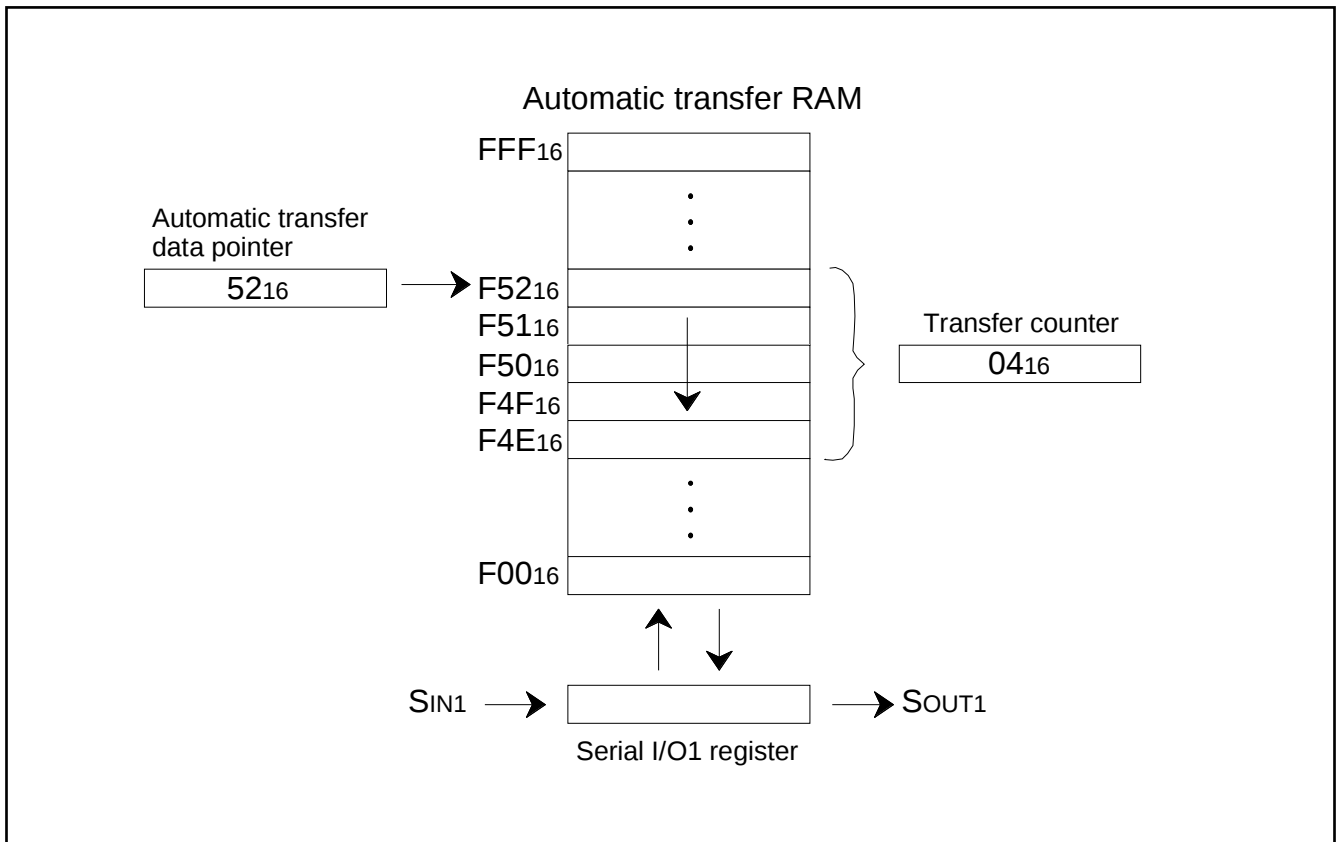


Fig. 26 Automatic transfer serial I/O operation

●Handshake signal

1. S_{STB1} output signal

The S_{STB1} output is a signal to inform an end of transmission/reception to the serial transfer destination. The S_{STB1} output signal can be used only when the internal synchronous clock is selected. In the initial status, namely, in the status in which the serial I/O initialization bit (b4) is reset to "0", the S_{STB1} output goes to "L", or the S_{STB1} output goes to "H".

At the end of transmit/receive operation, when the data of the serial I/O1 register is all output from S_{OUT1}, pulses are output in the period of 1 cycle of the transfer clock so as to cause the S_{STB1} output to go "H" or the S_{STB1} output to go "L." After that, each pulse is returned to the initial status in which S_{STB1} output goes to "L" or the S_{STB1} output goes to "H".

Furthermore, after 1 cycle, the serial transfer status flag (b5) is reset to "0".

In the automatic transfer serial I/O mode, whether the S_{STB1} output is to be active at an end of each 1-byte data or after completion of transfer of all data can be selected by the S_{BSY1} output • S_{STB1} output function selection bit (b4 of address 001A16) of serial I/O1 control register 2.

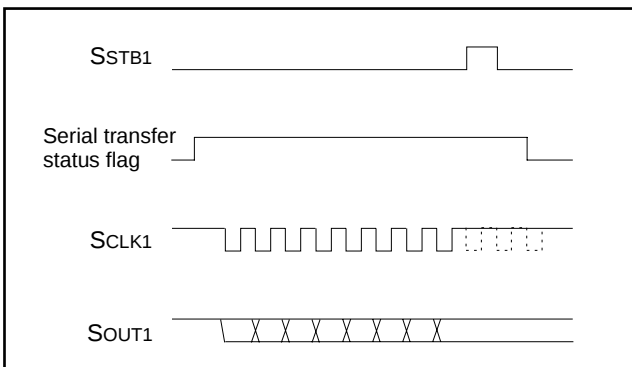


Fig. 27 S_{STB1} output operation

2. S_{BSY1} input signal

The S_{BSY1} input is a signal which receives a request for a stop of transmission/reception from the serial transfer destination.

When the internal synchronous clock is selected, input an "H" level signal into the S_{BSY1} input and an "L" level signal into the S_{BSY1} input in the initial status in which transfer is stopped.

When starting a transmit/receive operation, input an "L" level signal into the S_{BSY1} input and an "H" level signal into the S_{BSY1} input in the period of 1.5 cycles or more of the transfer clock. Then, transfer clocks are output from the SCLK1 output.

When an "H" level signal is input into the S_{BSY1} input and an "L" level signal into the S_{BSY1} input after a transmit/receive operation is started, this transmit/receive operation are not stopped immediately and the transfer clocks from the SCLK1 output is not stopped until the specified number of bits are transmitted and received.

The handshake unit of the 8-bit serial I/O is 8 bits and that of the automatic transfer serial I/O is 8 bits.

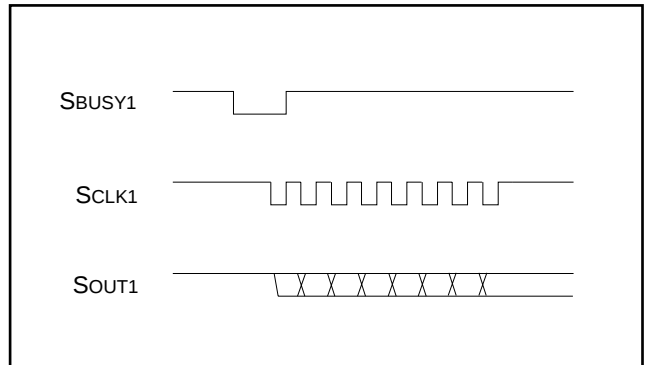


Fig. 28 S_{BSY1} input operation (internal synchronous clock)

When the external synchronous clock is selected, input an "H" level signal into the S_{BSY1} input and an "L" level signal into the S_{BSY1} input in the initial status in which transfer is stopped. At this time, the transfer clocks to be input in SCLK1 become invalid.

During serial transfer, the transfer clocks to be input in SCLK1 become valid, enabling a transmit/receive operation, while an "L" level signal is input into the S_{BSY1} input and an "H" level signal is input into the S_{BSY1} input.

When changing the input values in the S_{BSY1} input and the S_{BSY1} input at these operations, change them when the SCLK1 input is in a high state.

When the high impedance of the S_{OUT1} output is selected by the S_{OUT1} pin control bit (b6), the S_{OUT1} output becomes active, enabling serial transfer by inputting a transfer clock to SCLK1, while an "L" level signal is input into the S_{BSY1} input and an "H" level signal is input into the S_{BSY1} input.

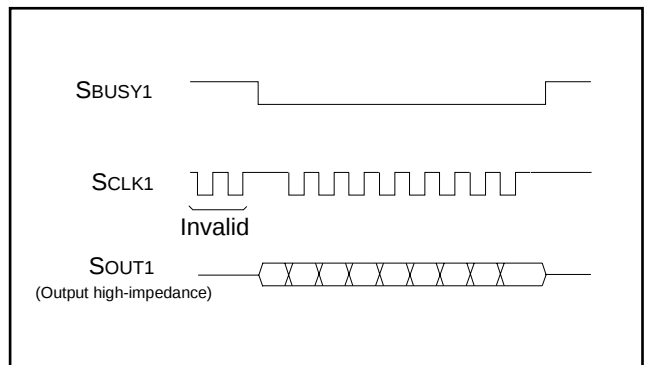


Fig. 29 S_{BSY1} input operation (external synchronous clock)

3. S_{BSY1} output signal

The S_{BSY1} output is a signal which requests a stop of transmission/reception to the serial transfer destination. In the automatic transfer serial I/O mode, regardless of the internal or external synchronous clock, whether the S_{BSY1} output is to be active at transfer of each 1-byte data or during transfer of all data can be selected by the S_{BSY1} output • S_{STB1} output function selection bit (b4).

In the initial status, the status in which the serial I/O initialization bit (b4) is reset to "0", the S_{BSY1} output goes to "H" and the S_{BSY1} output goes to "L".

When the internal synchronous clock is selected, in the 8-bit serial I/O mode and the automatic transfer serial I/O mode (S_{BUSY1} output function outputs in 1-byte units), the S_{BUSY1} output goes to "L" and the S_{BUSY1} output goes to "H" before 0.5 cycle (transfer clock) of the timing at which the transfer clock from the SCLK1 output goes to "L" at a start of transmit/receive operation.

In the automatic transfer serial I/O mode (the S_{BUSY1} output function outputs all transfer data), the S_{BUSY1} output goes to "L" and the S_{BUSY1} output goes to "H" when the first transmit data is written into the serial I/O1 register (address 001B16).

When the external synchronous clock is selected, the S_{BUSY1} output goes to "L" and the S_{BUSY1} output goes to "H" when transmit

data is written into the serial I/O1 register to start a transmit operation, regardless of the serial I/O transfer mode.

At termination of transmit/receive operation, the S_{BUSY1} output returns to "H" and the S_{BUSY1} output returns to "L", the initial status, when the serial transfer status flag is set to "0", regardless of whether the internal or external synchronous clock is selected.

Furthermore, in the automatic transfer serial I/O mode (S_{BUSY1} output function outputs in 1-byte units), the S_{BUSY1} output goes to "H" and the S_{BUSY1} output goes to "L" each time 1-byte of receive data is written into the automatic transfer RAM.

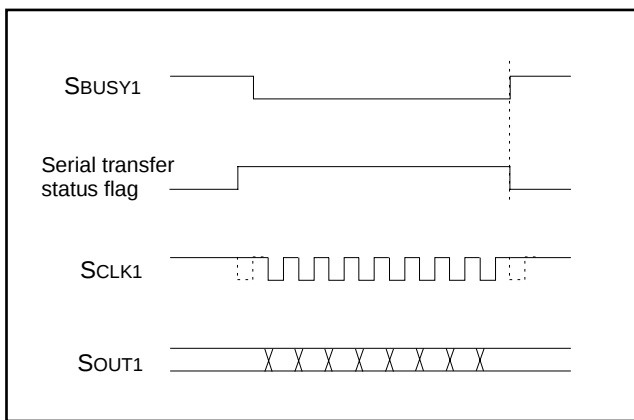


Fig. 30 S_{BUSY1} output operation
(internal synchronous clock, 8-bits serial I/O)

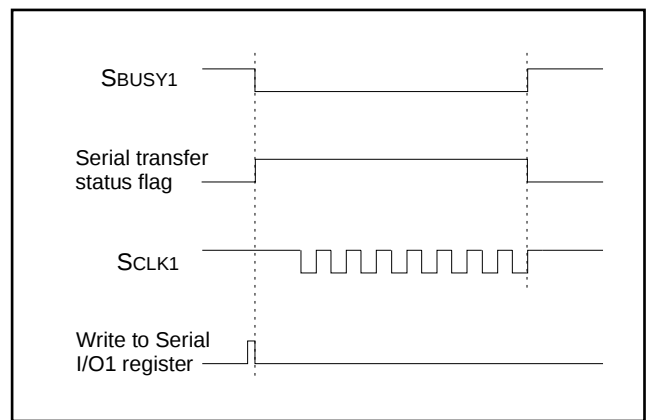


Fig. 31 S_{BUSY1} output operation
(external synchronous clock, 8-bits serial I/O)

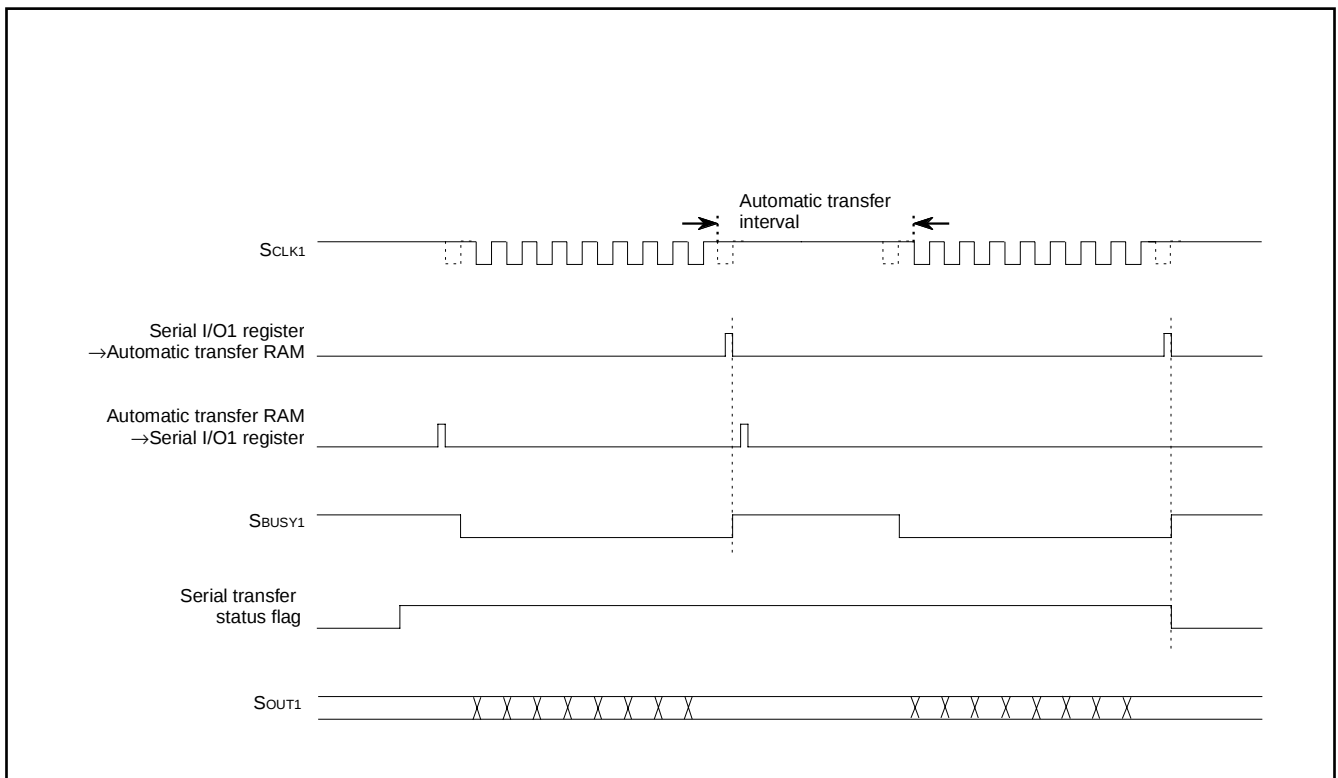


Fig. 32 S_{BUSY1} output operation in automatic transfer serial I/O mode
(internal synchronous clock, S_{BUSY1} output function outputs each 1-byte)

4. SRDY1 output signal

The SRDY1 output is a transmit/receive enable signal which informs the serial transfer destination that transmit/receive is ready. In the initial status, when the serial I/O initialization bit (b4) is reset to "0", the SRDY1 output goes to "L" and the $\overline{\text{SRDY1}}$ output goes to "H". After transmitted data is stored in the serial I/O1 register (address 001B16) and a transmit/receive operation becomes ready, the SRDY1 output goes to "H" and the $\overline{\text{SRDY1}}$ output goes to "L". When a transmit/receive operation is started and the transfer clock goes to "L", the SRDY1 output goes to "L" and the $\overline{\text{SRDY1}}$ output goes to "H".

5. SRDY1 input signal

The SRDY1 input signal becomes valid only when the SRDY1 input and the SBUSY1 output are used. The SRDY1 input is a signal for receiving a transmit/receive ready completion signal from the serial transfer destination.

When the internal synchronous clock is selected, input a low level signal into the SRDY1 input and a high level signal into the $\overline{\text{SRDY1}}$ input in the initial status in which the transfer is stopped.

When an "H" level signal is input into the SRDY1 input and an "L" level signal is input into the $\overline{\text{SRDY1}}$ input for a period of 1.5 cycles or more of transfer clock, transfer clocks are output from the SCLK1 output and a transmit/receive operation is started.

After the transmit/receive operation is started and an "L" level signal is input into the SRDY1 input and an "H" level signal into the $\overline{\text{SRDY1}}$ input, this operation cannot be immediately stopped.

After the specified number of bits are transmitted and received, the transfer clocks from the SCLK1 output is stopped. The handshake unit of the 8-bit serial I/O and that of the automatic transfer serial I/O are of 8 bits.

When the external synchronous clock is selected, the SRDY1 input becomes one of the triggers to output the SBUSY1 signal.

To start a transmit/receive operation (SBUSY1 output: "L", SBUSY1 output: "H"), input an "H" level signal into the SRDY1 input and an "L" level signal into the $\overline{\text{SRDY1}}$ input, and also write transmit data into the serial I/O1 register.

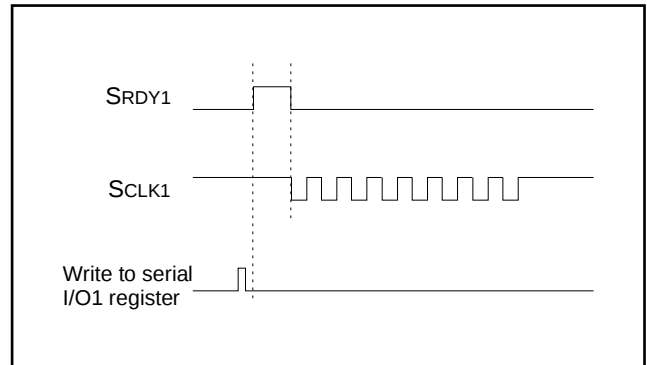


Fig. 33 SRDY1 output operation

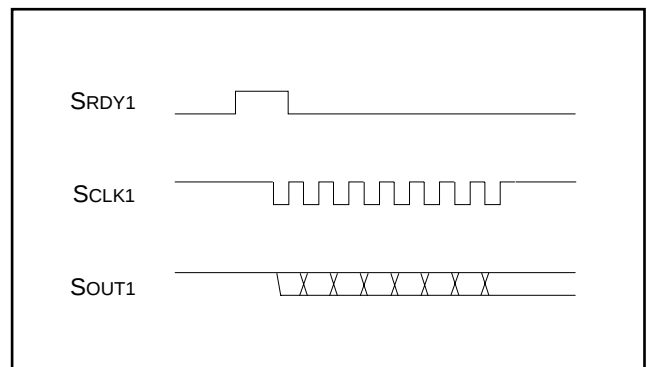


Fig. 34 SRDY1 input operation (internal synchronous clock)

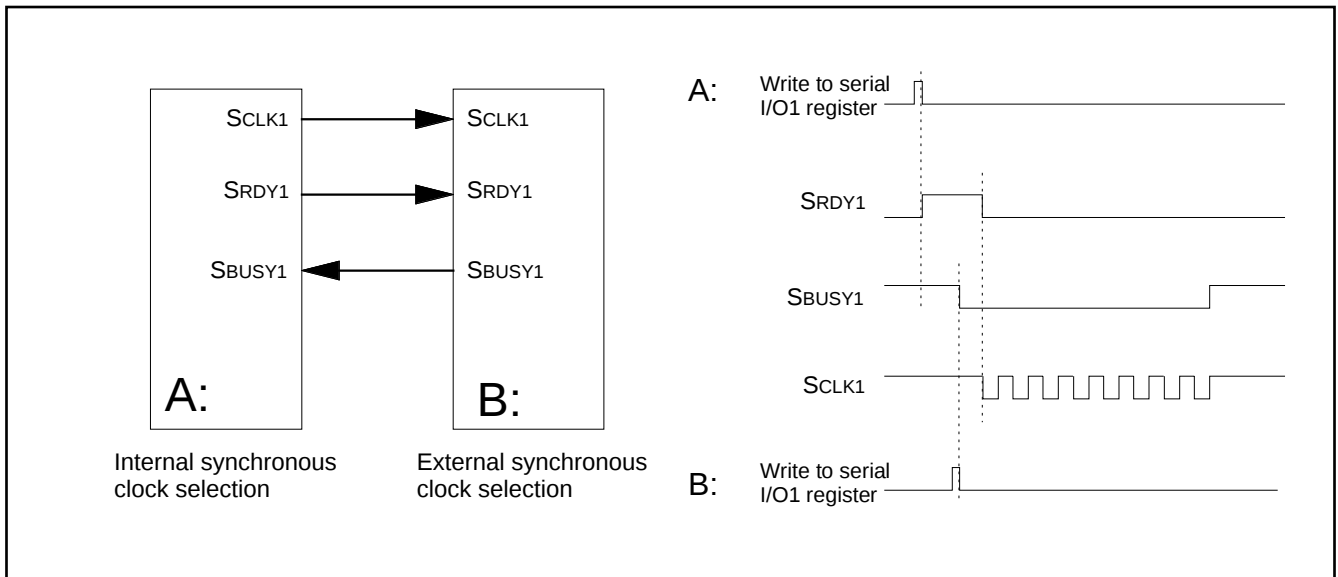


Fig. 35 Handshake operation at serial I/O1 mutual connecting (1)

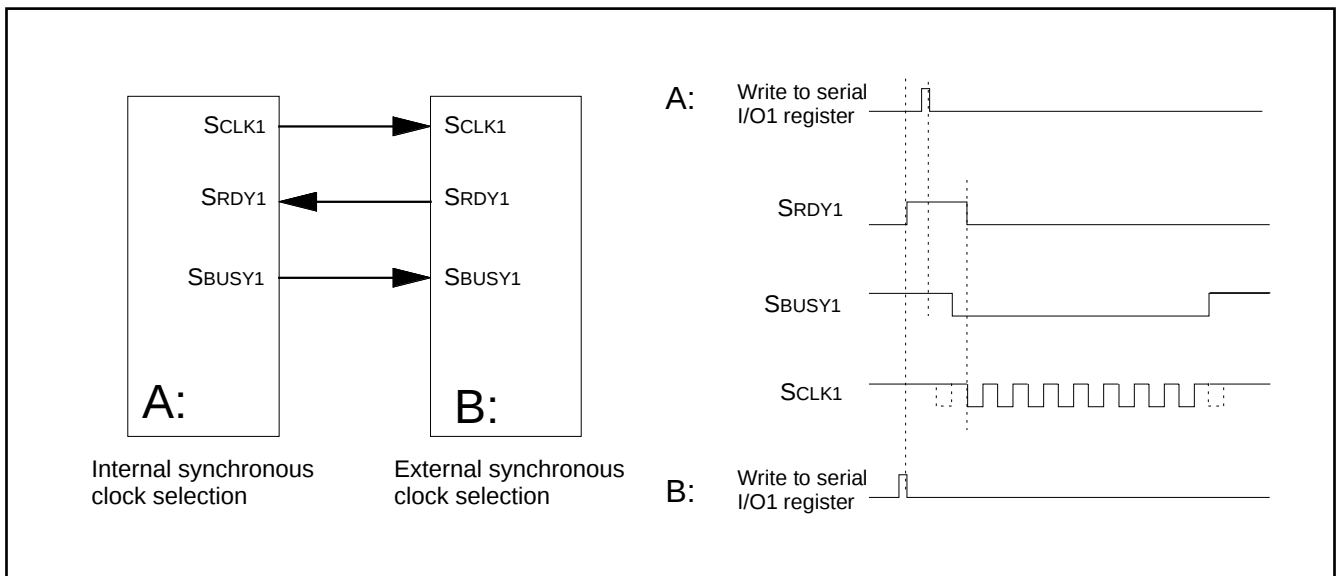


Fig. 36 Handshake operation at serial I/O1 mutual connecting (2)

(2) Asynchronous serial I/O (UART) mode

The asynchronous serial I/O (UART) mode can be selected by clearing the serial I/O2 mode selection bit (b6) of the serial I/O2 control register (address 001D₁₆) to "0". Eight serial data transfer formats can be selected and the transfer formats used by the transmitter and receiver must be identical.

The transmit and receive shift registers each have a buffer (the two buffers have the same address in memory). Since the shift register cannot be written to or read from directly, transmit data is written to the transmit buffer, and receive data is read from the receive buffer. The transmit buffer can also hold the next data to be transmitted, and the receive buffer can receive 2-byte data continuously.

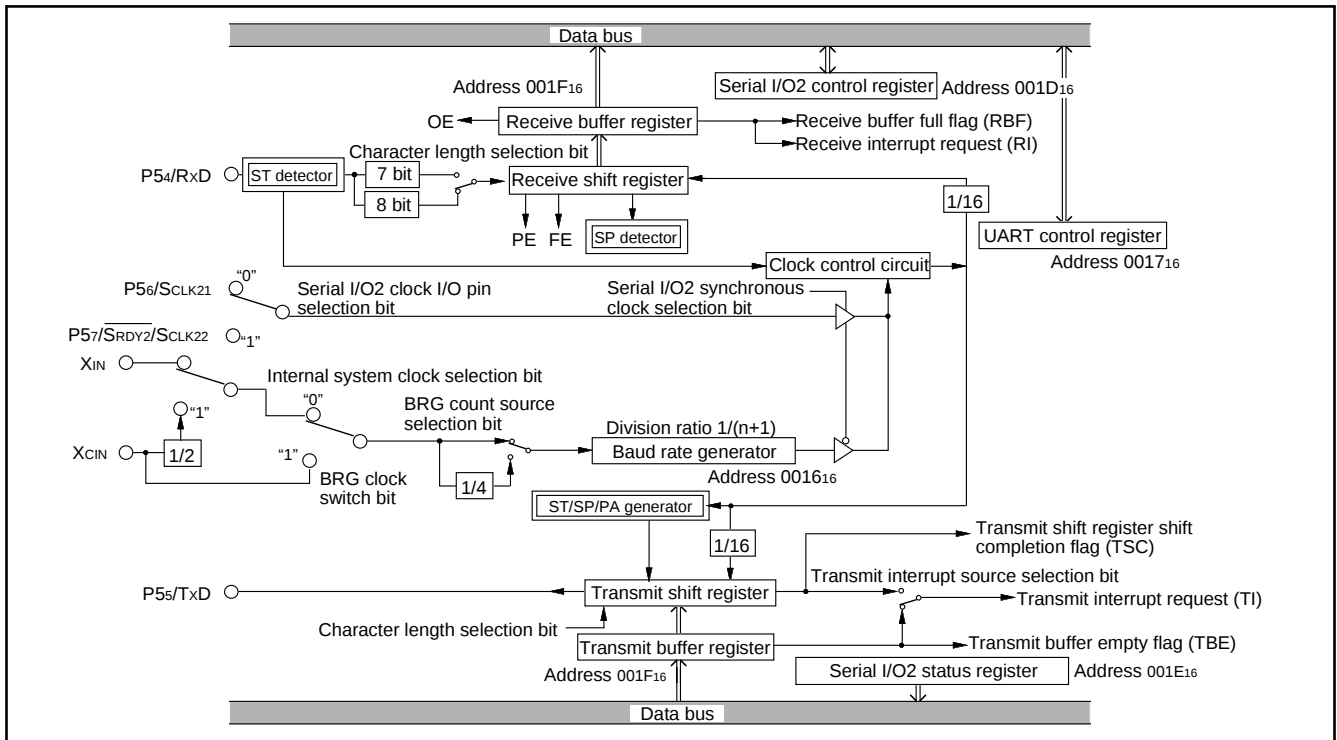


Fig. 39 Block diagram of UART serial I/O2

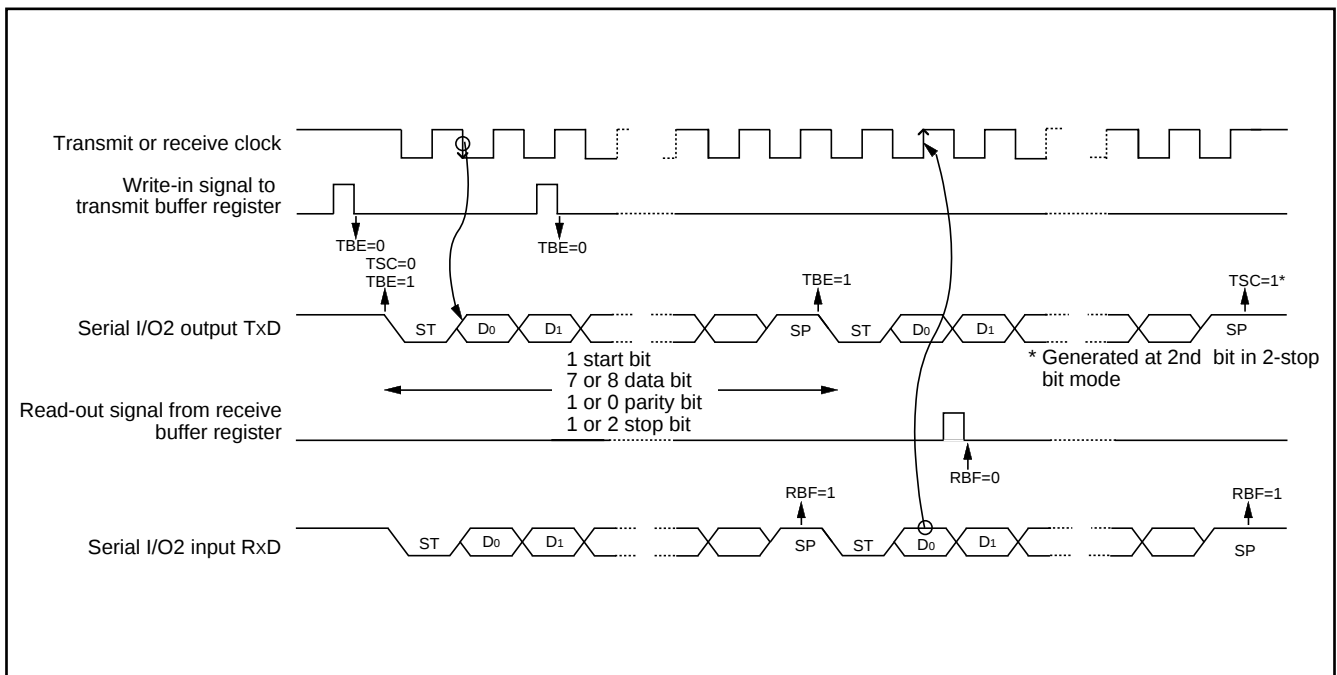


Fig. 40 Operation of UART serial I/O2 function

[Serial I/O2 Control Register] SIO2CON (001D16)

The serial I/O2 control register contains eight control bits for serial I/O2 functions.

[UART Control Register] UARTCON (001716)

This is a 7 bit register containing four control bits, which are valid when UART is selected, two control bits, which are valid when using serial I/O2, and one control bit, which is always valid.

Data format of serial data receive/transfer and the output structure of the P55/TxD pin, etc. are set by this register.

[Serial I/O2 Status Register] SIO2STS (001E16)

The read-only serial I/O2 status register consists of seven flags (b0 to b6) which indicate the operating status of the serial I/O2 function and various errors. Three of the flags (b4 to b6) are only valid in the UART mode. The receive buffer full flag (b1) is cleared to "0" when the receive buffer is read.

The error detection is performed at the same time data is transferred from the receive shift register to the receive buffer register, and the receive buffer full flag is set. A writing to the serial I/O2 status regis-

ter clears error flags OE, PE, FE, and SE (b3 to b6, respectively). Writing "0" to the serial I/O2 enable bit (SIOE : b7 of the serial I/O2 control register) also clears all the status flags, including the error flags.

All bits of the serial I/O2 status register are initialized to "0" at reset, but if the transmit enable bit (b4) of the serial I/O2 control register has been set to "1", the transmit shift register shift completion flag (b2) and the transmit buffer empty flag (b0) become "1".

[Serial I/O2 Transmit Buffer Register/Receive Buffer Register] TB/RB (001F16)

The transmit buffer and the receive buffer are located in the same address. The transmit buffer is write-only and the receive buffer is read-only. If a character bit length is 7 bits, the MSB of data stored in the receive buffer is "0".

[Baud Rate Generator] BRG (001616)

The baud rate generator determines the baud rate for serial transfer. With the 8-bit counter having a reload register, the baud rate generator divides the frequency of the count source by $1/(n+1)$, where n is the value written to the baud rate generator.

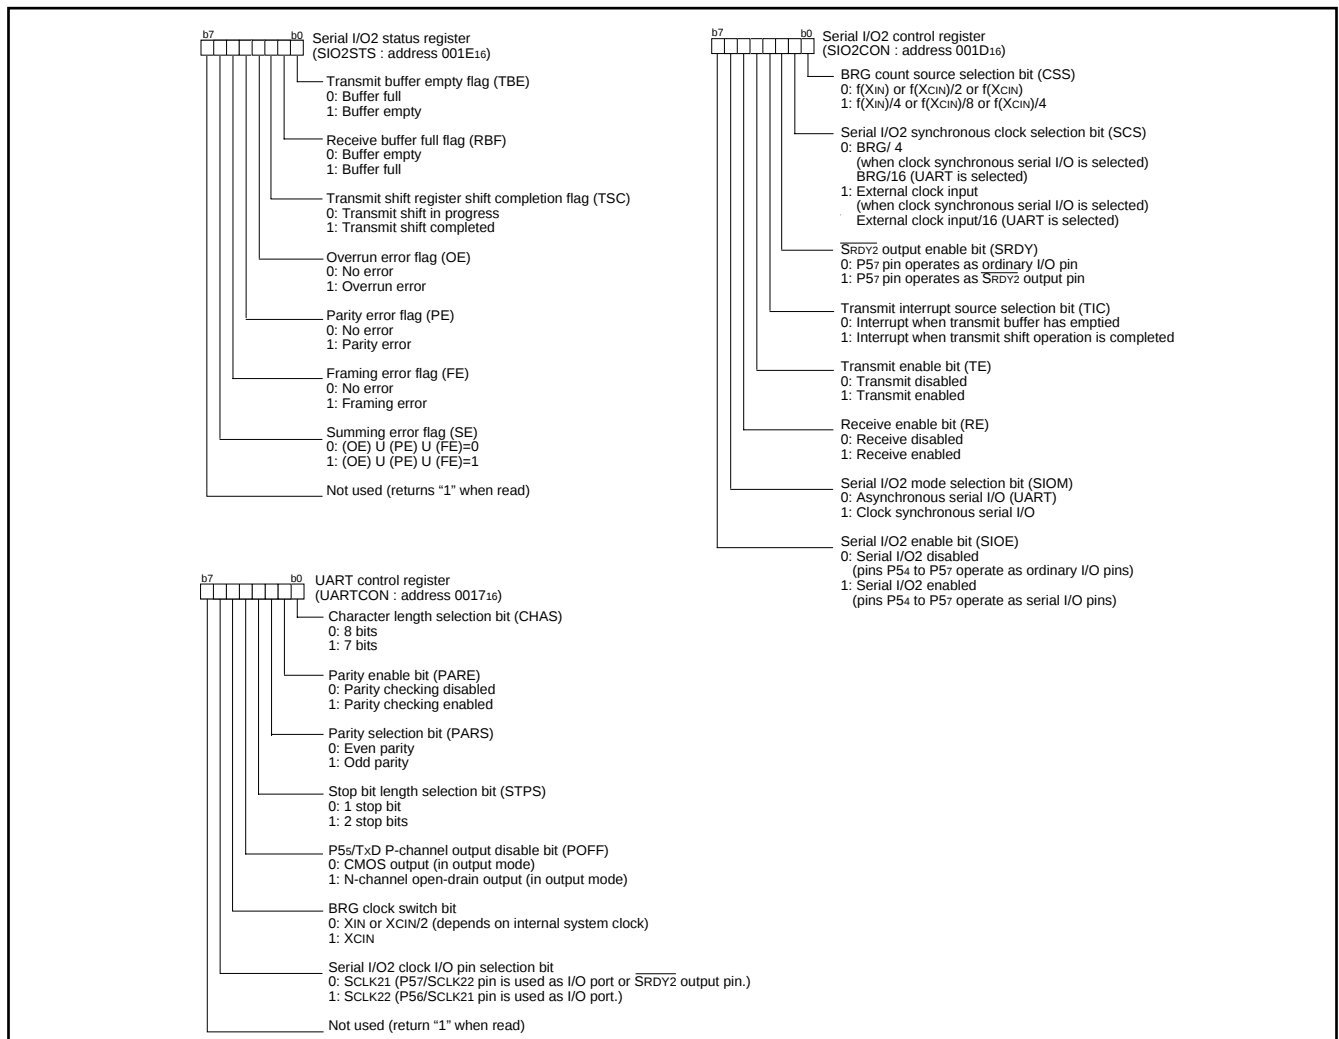


Fig. 41 Structure of serial I/O2 related register

FLD CONTROLLER

The 38B4 group has fluorescent display (FLD) drive and control circuits.

The FLD controller consists of the following components:

- 40 pins for FLD control pins
- FLDC mode register
- FLD data pointer
- FLD data pointer reload register
- Tdisp time set register

- Toff1 time set register
- Toff2 time set register
- Port P0FLD/port switch register
- Port P2FLD/port switch register
- Port P8FLD/port switch register
- Port P8 FLD output control register
- FLD automatic display RAM (max. 160 bytes)

A gradation display mode can be used for bright/dark display as a display function.

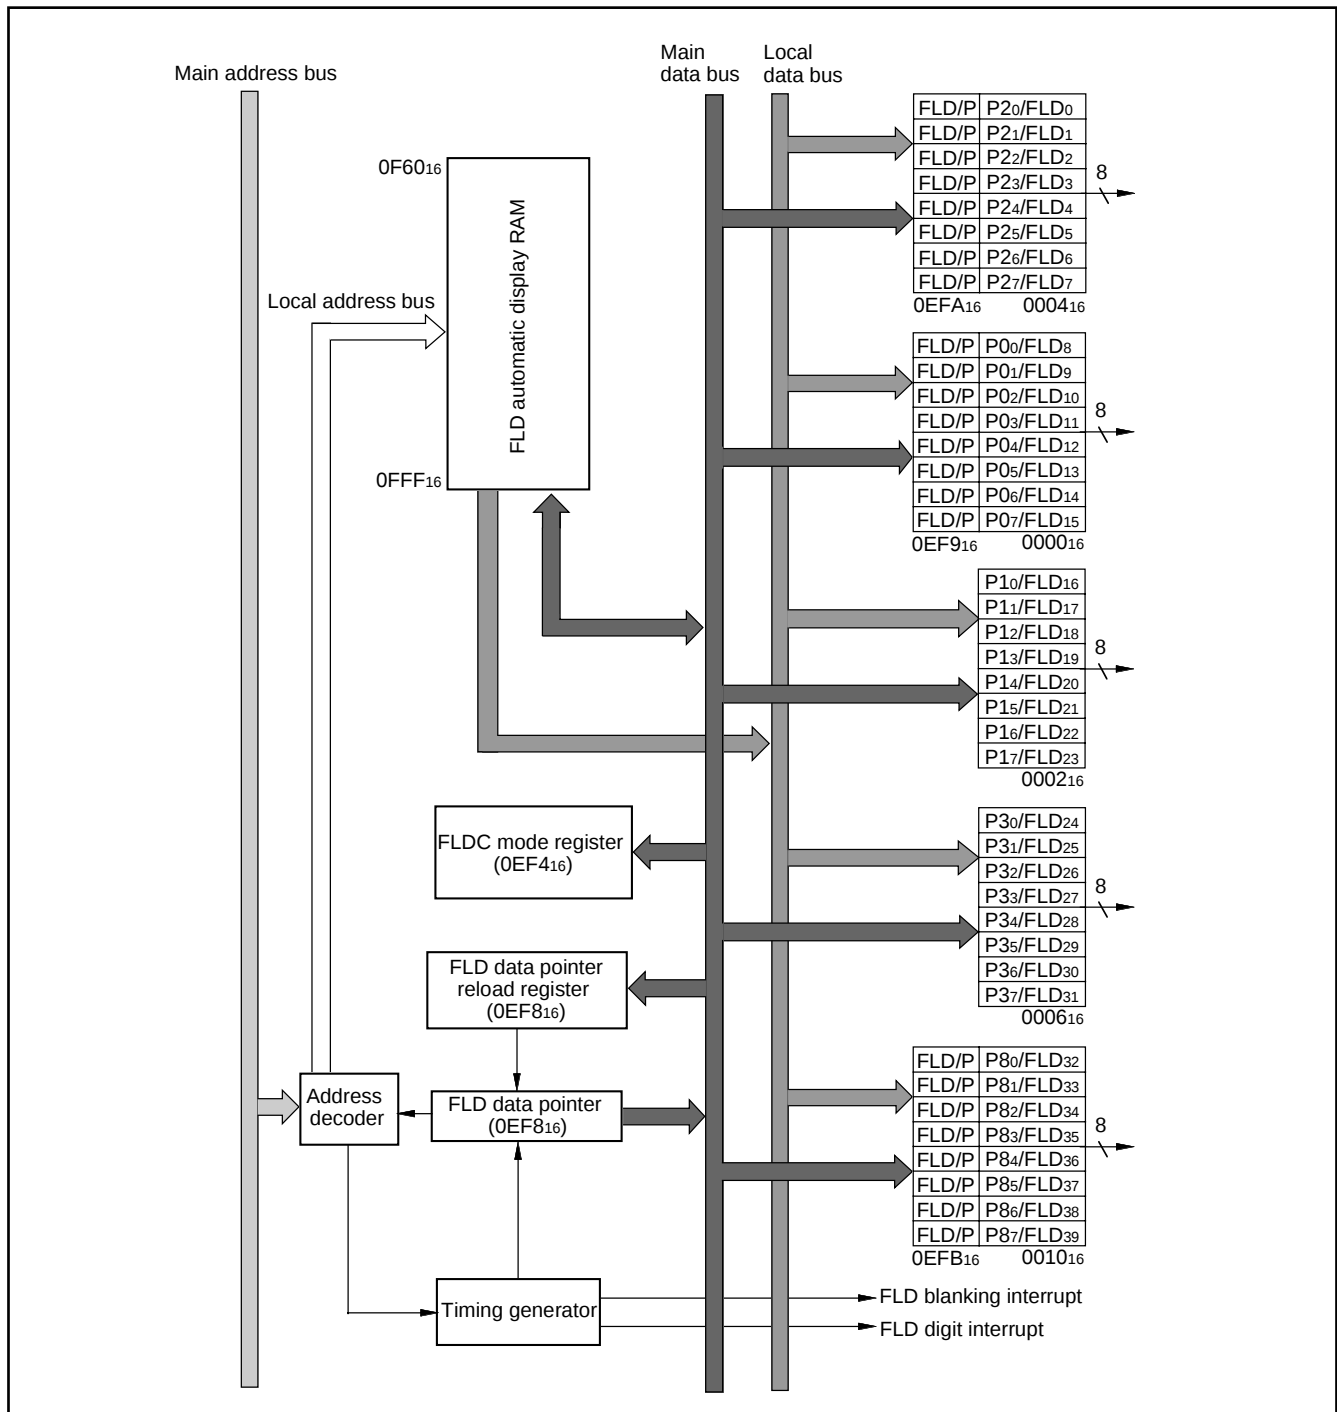


Fig. 42 Block diagram for FLD control circuit

[FLDC Mode Register] FLDM

The FLDC mode register is a 8-bit register respectively which is used to control the FLD automatic display and to set the blanking time Tscan for key-scan.

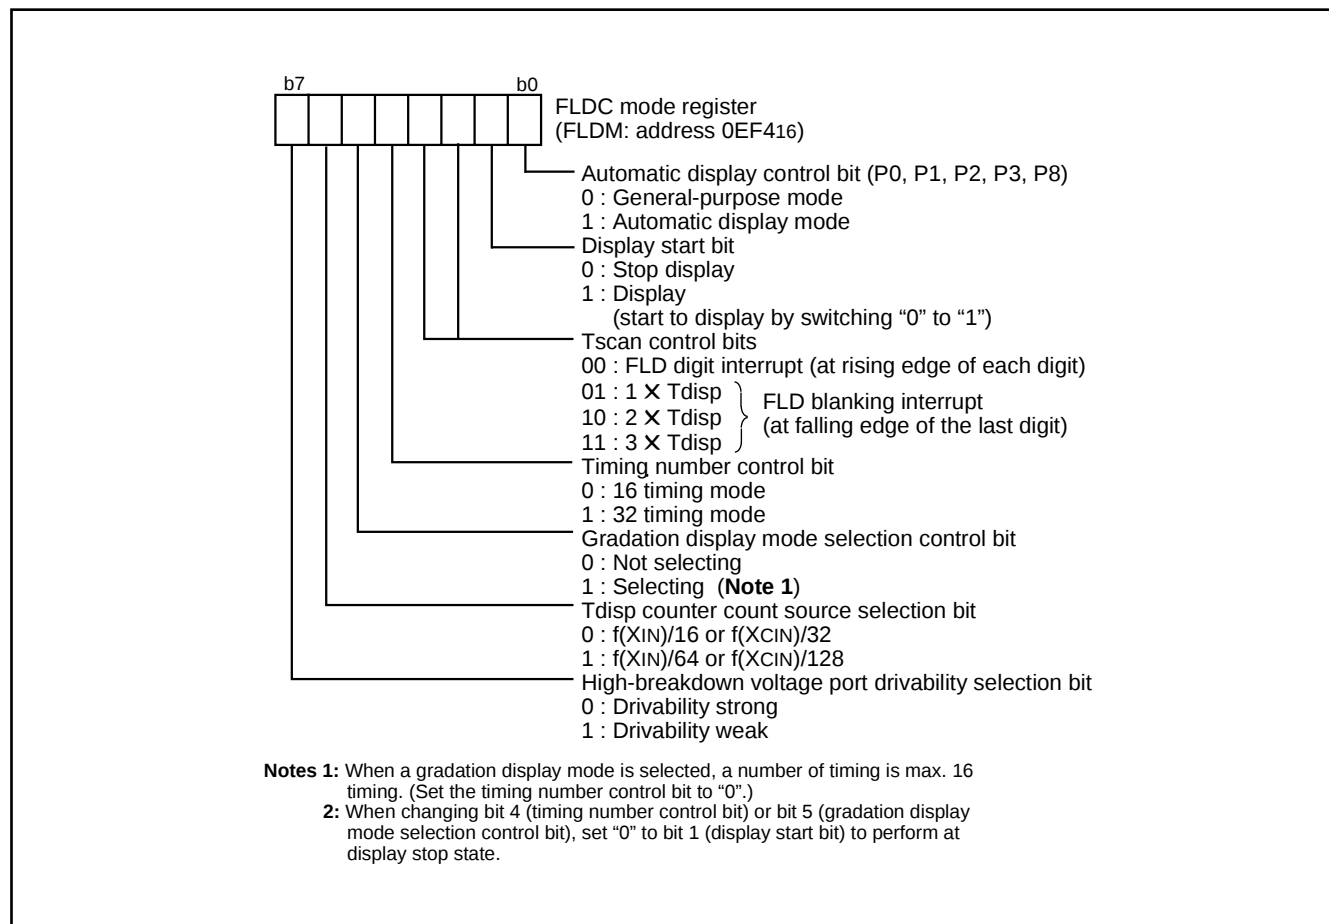


Fig. 43 Structure of FLDC mode register

FLD Automatic Display Pins

When the automatic display control bits of the FLDC mode register (address 0EF4₁₆) are set to “1,” the ports of P0, P1, P2, P3 and P8 are used as FLD automatic display pins.

When using the FLD automatic display mode, set each port to the FLD pin or the general-purpose port using the respective switch register in accordance with the number of segments and the number of digits.

This setting is performed by writing a value into the FLD/port switch register (addresses 0EF9₁₆ to 0EFB₁₆) of each port.

This setting can be performed in units of bit. When “0” is set, the port is set to the general-purpose port. When “1” is set, the port is set to the FLD pin. There is no restriction on whether the FLD pin is to be used as a segment pin or a digit pin.

Table 9 Pins in FLD automatic display mode

Port Name	Automatic Display Pins	Setting Method
P0, P2, P80–P83	FLD0–FLD15 FLD32–FLD35	The individual bits of the FLD/port switch register (addresses 0EF9 ₁₆ –0EFB ₁₆) can be set each pin either FLD port (“1”) or general-purpose port (“0”).
P1, P3	FLD16–FLD31	None (FLD only)
P84–P87	FLD36–FLD39	The individual bits of the FLD/port switch register (address 0EFB ₁₆) can be set each pin to either FLD port (“1”) or general-purpose port (“0”). The output can be reversed by the port P8 FLD output control register (address 0EFC ₁₆). The port output format is the CMOS output format. When using the port as a display pin, a driver must be installed externally.

	Setting example 1	Setting example 2	Setting example 3	Setting example 4
Number of segments	15	25	18	16
Number of digits	8	15	20	10
Port P2	0 P20 0 P21 0 P22 0 P23 0 P24 0 P25 0 P26 0 P27	1 FLD0(SEG1) 1 FLD1(SEG2) 1 FLD2(SEG3) 1 FLD3(SEG4) 1 FLD4(SEG5) 1 FLD5(SEG6) 1 FLD6(SEG7) 1 FLD7(SEG8)	0 P20 0 P21 1 FLD2(SEG1) 1 FLD3(SEG2) 1 FLD4(SEG3) 1 FLD5(SEG4) 1 FLD6(SEG5) 1 FLD7(SEG6)	0 P20 0 P21 0 P22 0 P23 0 P24 0 P25 1 FLD4(SEG1) 1 FLD5(SEG2)
Port P0	1 FLD8(SEG1) 0 P01 0 P02 0 P03 0 P04 0 P05 1 FLD14(SEG2) 1 FLD15(SEG3)	1 FLD8(SEG9) 1 FLD9(SEG10) 1 FLD10(SEG11) 1 FLD11(SEG12) 1 FLD12(SEG13) 1 FLD13(SEG14) 1 FLD14(SEG15) 1 FLD15(SEG16)	1 FLD8(DIG1) 1 FLD9(DIG2) 1 FLD10(DIG3) 1 FLD11(DIG4) 1 FLD12(DIG5) 1 FLD13(DIG6) 1 FLD14(DIG7) 1 FLD15(DIG8)	1 FLD6(SEG3) 1 FLD7(SEG4) 1 FLD8(SEG5) 1 FLD9(SEG6) 1 FLD10(SEG7) 1 FLD11(SEG8) 1 FLD12(SEG9) 1 FLD13(SEG10)
Port P1	FLD16(DIG1) 1 FLD17(DIG2) 1 FLD18(DIG3) 1 FLD19(DIG4) 1 FLD20(SEG4) 0 FLD21(SEG5) 0 FLD22(SEG6) 0 FLD23(SEG7) 0	FLD16(DIG1) 1 FLD17(DIG2) 1 FLD18(DIG3) 1 FLD19(DIG4) 1 FLD20(DIG5) 1 FLD21(DIG6) 1 FLD22(DIG7) 1 FLD23(DIG8) 1	FLD16(DIG9) 1 FLD17(DIG10) 1 FLD18(DIG11) 1 FLD19(DIG12) 1 FLD20(DIG13) 1 FLD21(DIG14) 1 FLD22(DIG15) 1 FLD23(DIG16) 1	FLD16(DIG1) 1 FLD17(DIG2) 1 FLD18(DIG3) 1 FLD19(DIG4) 1 FLD20(DIG5) 1 FLD21(DIG6) 1 FLD22(DIG7) 1 FLD23(DIG8) 1
Port P3	FLD24(SEG8) 0 FLD25(SEG9) 0 FLD26(SEG10) 0 FLD27(SEG11) 0 FLD28(DIG5) 1 FLD29(DIG6) 1 FLD30(DIG7) 1 FLD31(DIG8) 1	FLD24(DIG9) 1 FLD25(DIG10) 1 FLD26(DIG11) 1 FLD27(DIG12) 1 FLD28(DIG13) 1 FLD29(DIG14) 1 FLD30(DIG15) 1 FLD31(SEG17) 0	FLD24(DIG17) 1 FLD25(DIG18) 1 FLD26(DIG19) 1 FLD27(DIG20) 1 FLD28(SEG7) 0 FLD29(SEG8) 0 FLD30(SEG9) 0 FLD31(SEG10) 0	FLD24(DIG9) 1 FLD25(DIG10) 1 FLD14(SEG11) 0 FLD15(SEG12) 0 FLD26(SEG13) 0 FLD27(SEG14) 0 FLD28(SEG15) 0 FLD29(SEG16) 0
Port P8	1 FLD32(SEG12) 1 FLD33(SEG13) 1 FLD34(SEG14) 1 FLD35(SEG15) 0 P84 0 P85 0 P86 0 P87	1 FLD32(SEG18) 1 FLD33(SEG19) 1 FLD34(SEG20) 1 FLD35(SEG21) 1 FLD36(SEG22) 1 FLD37(SEG23) 1 FLD38(SEG24) 1 FLD39(SEG25)	1 FLD32(SEG11) 1 FLD33(SEG12) 1 FLD34(SEG13) 1 FLD35(SEG14) 1 FLD36(SEG15) 1 FLD37(SEG16) 1 FLD38(SEG17) 1 FLD39(SEG18)	0 P80 0 P81 0 P82 0 P83 0 P84 0 P85 0 P86 0 P87
	↑ Value of FLD/port switch register			↑ Value of FLDRAM write disable register If data is set to “1”, data is protected. This setting does not decide the FLD port function (SEG/DIG).

Fig. 44 Segment/Digit setting example

FLD Automatic Display RAM

The FLD automatic display RAM uses the 160 bytes of addresses 0F60₁₆ to 0FFF₁₆. For FLD, the 3 modes of 16-timing ordinary mode, 16-timing•gradation display mode and 32-timing mode are available depending on the number of timings and the presence/absence of gradation display.

The automatic display RAM in each mode is as follows:

(1) 16-timing•ordinary mode

The 80 bytes of addresses 0FB0₁₆ to 0FFF₁₆ are used as a FLD display data store area. Because addresses 0F60₁₆ to 0FAF₁₆ are not used as the automatic display RAM, they can be the ordinary RAM or serial I/O automatic transfer RAM.

(2) 16-timing•gradation display mode

The 160 bytes of addresses 0F60₁₆ to 0FFF₁₆ are used. The 80 bytes of addresses 0FB0₁₆ to 0FFF₁₆ are used as an FLD display data store area, while the 80 bytes of addresses 0F60₁₆ to 0FAF₁₆ are used as a gradation display control data store area.

(3) 32-timing mode

The 160 bytes of addresses 0F60₁₆ to 0FFF₁₆ are used as an FLD display data store area.

[FLD Data Pointer and FLD Data Pointer Reload Register] FLDDP (0EF8₁₆)

Both the FLD data pointer and FLD data pointer reload register are 8-bit registers assigned at address 0EF8₁₆. When writing data to this address, the data is written to the FLD data pointer reload register; when reading data from this address, the value in the FLD data pointer is read.

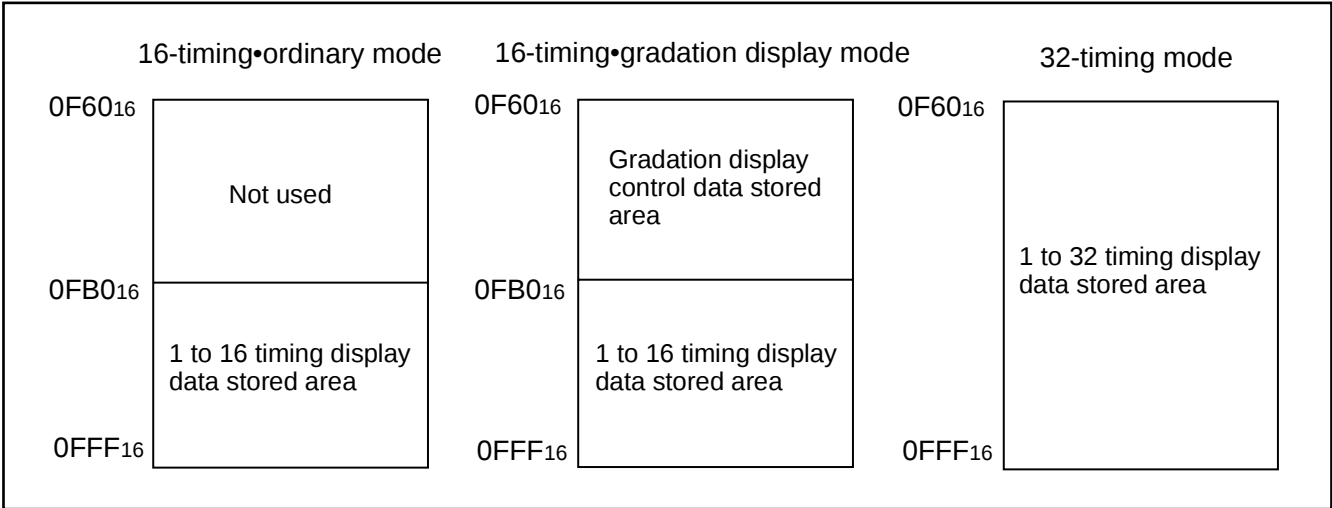


Fig. 45 FLD automatic display RAM assignment

Data Setup

(1) 16-timing•ordinary mode

The area of addresses 0FB0₁₆ to 0FFF₁₆ are used as a FLD automatic display RAM.

When data is stored in the FLD automatic display RAM, the last data of FLD port P2 is stored at address 0FB0₁₆, the last data of FLD port P0 is stored at address 0FC0₁₆, the last data of FLD port P1 is stored at address 0FD0₁₆, the last data of FLD port P3 is stored at address 0FE0₁₆, and the last data of FLD port P8 is stored at address 0FF0₁₆, to assign in sequence from the last data respectively.

The first data of the FLD port P2, P0, P1, P3, and P8 is stored at an address which adds the value of (the timing number – 1) to the corresponding address 0FB0₁₆, 0FC0₁₆, 0FD0₁₆, 0FE0₁₆, and 0FF0₁₆.

Set the FLD data pointer reload register to the value given by the timing number – 1. "1" is always written to bits 7, 6, and 5. Note that "0" is always read from bits 7, 6, and 5 when reading. "1" is always set to bit 4, but this bit become written value when reading.

(2) 16-timing•gradation display mode

Display data setting is performed in the same way as that of the 16-timing•ordinary mode. Gradation display control data is arranged at an address resulting from subtracting 0050₁₆ from the display data store address of each timing and pin. Bright display is performed by setting "0", and dark display is performed by setting "1".

Set the FLD data pointer reload register to the value given by the timing number – 1. "1" is always written to bits 7, 6, and 5. Note that "0" is always read from bits 7, 6, and 5 when reading. "1" is always set to bit 4, but this bit become written value when reading.

(3) 32-timing mode

The area of addresses 0F60₁₆ to 0FFF₁₆ are used as a FLD automatic display RAM. When data is stored in the FLD automatic display RAM, the last data of FLD port P2 is stored at address 0F60₁₆, the last data of FLD port P0 is stored at address 0F80₁₆, the last data of FLD port P1 is stored at address 0FA0₁₆, the last data of FLD port P3 is stored at address 0FC0₁₆, and the last data of FLD port P8 is stored at address 0FE0₁₆, to assign in sequence from the last data respectively.

The first data of the FLD port P2, P0, P1, P3, and P8 is stored at an address which adds the value of (the timing number – 1) to the corresponding address 0F60₁₆, 0F80₁₆, 0FA0₁₆, 0FC0₁₆, and 0FE0₁₆.

Set the FLD data pointer reload register to the value given by the timing number – 1. "1" is always written to bits 7, 6, and 5. Note that "0" is always read from bits 7, 6, and 5 when reading.

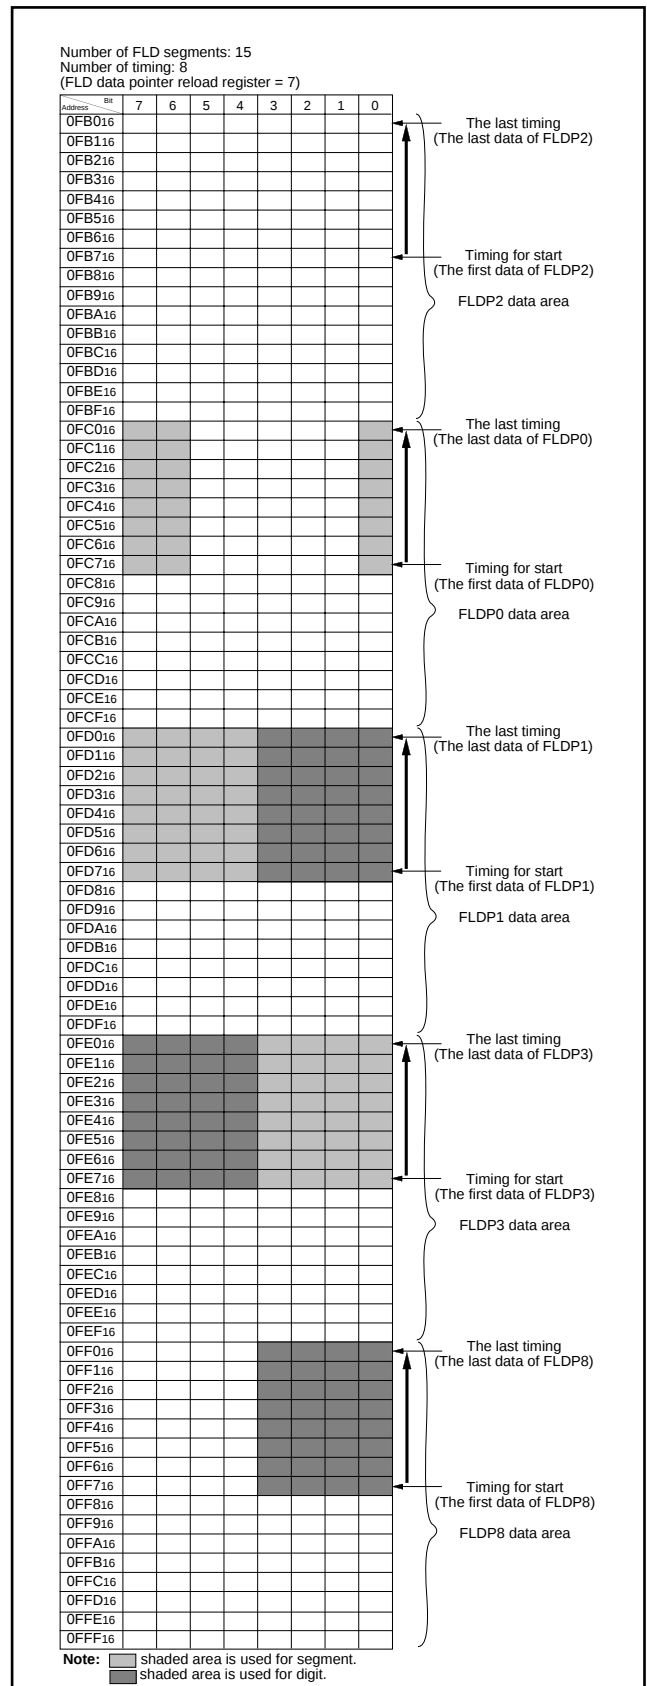


Fig. 46 Example of using FLD automatic display RAM in 16-timing•ordinary mode

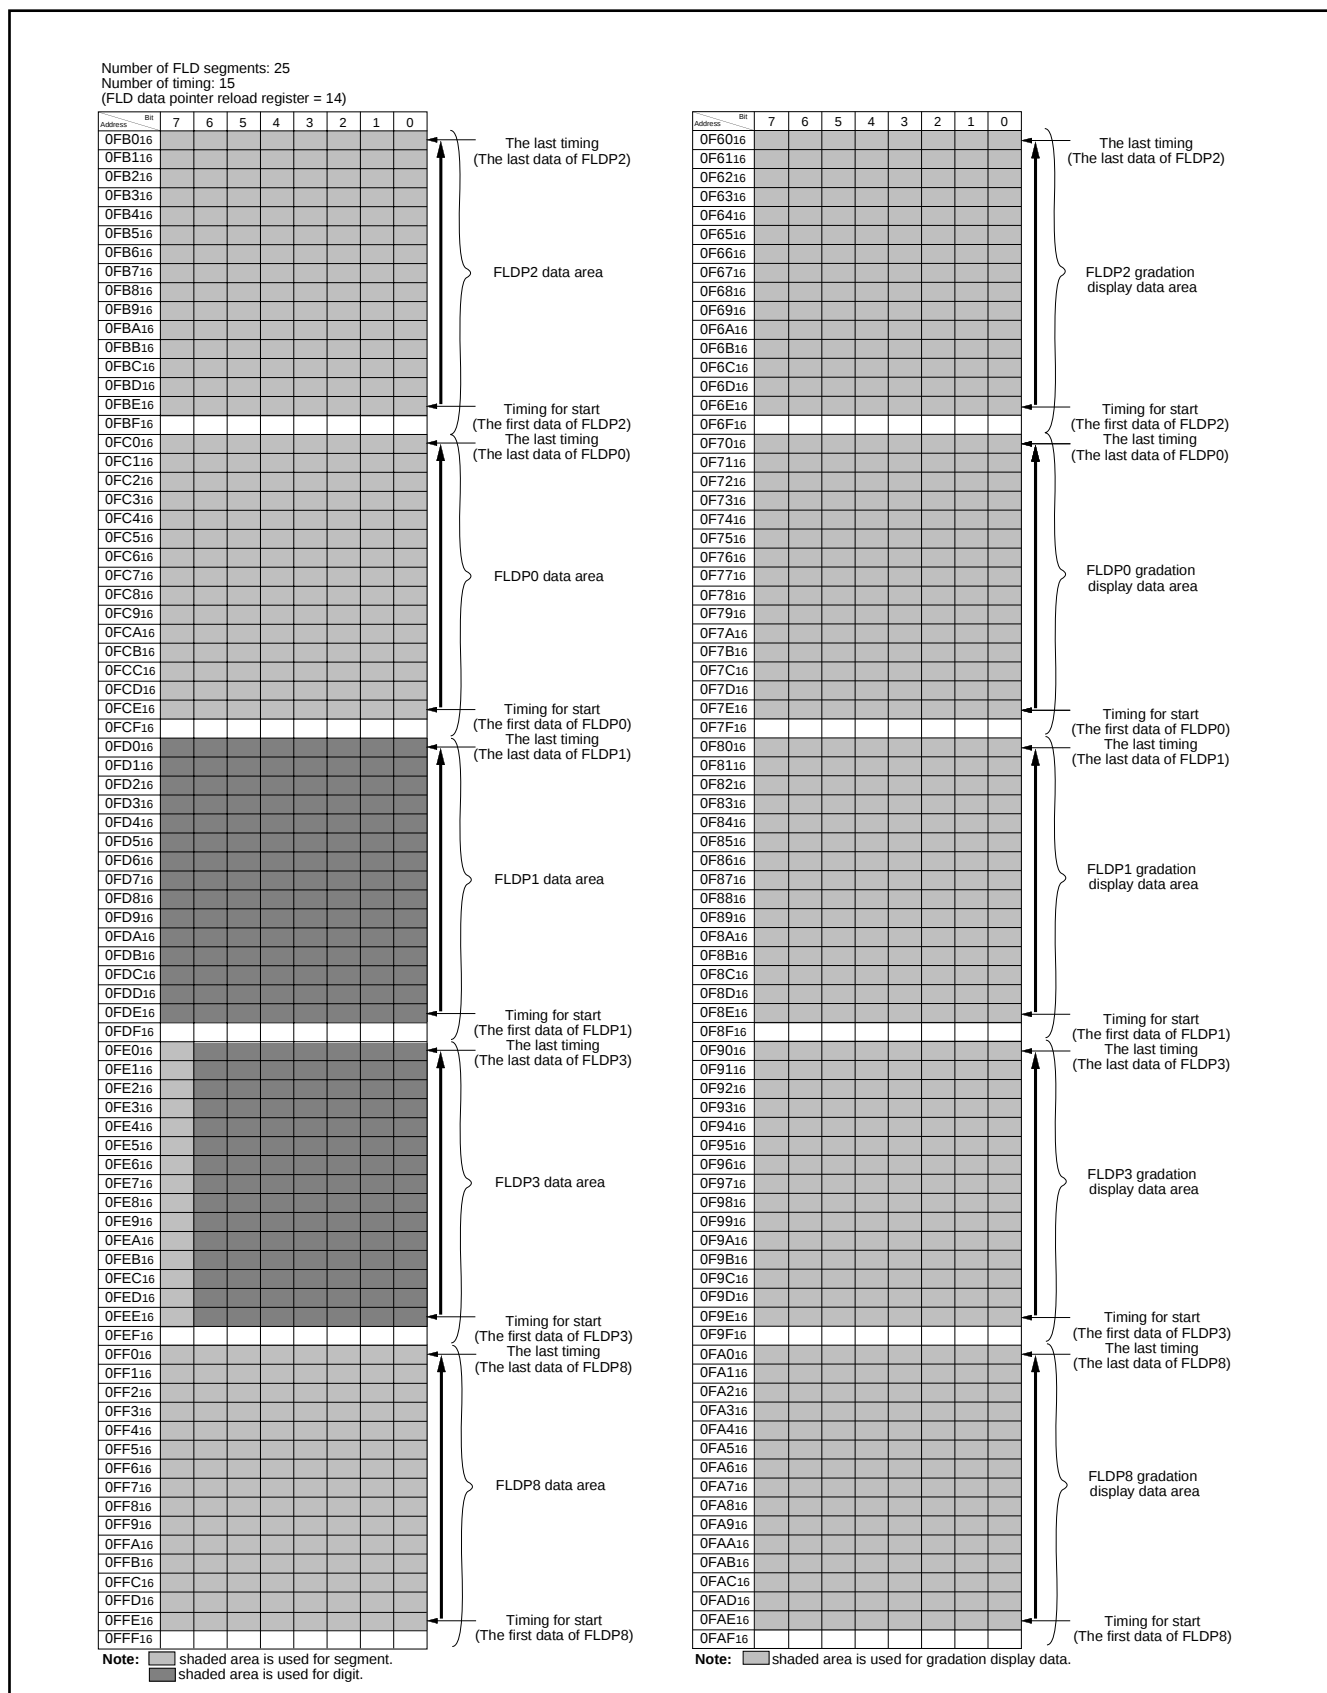


Fig. 47 Example of using FLD automatic display RAM in 16-timing•gradation display mode

Number of FLD segments: 18
 Number of timing: 20
 (FLD data pointer reload register = 19)

Address	7	6	5	4	3	2	1	0
0FB0 ₁₆								
0FB1 ₁₆								
0FB2 ₁₆								
0FB3 ₁₆								
0FB4 ₁₆								
0FB5 ₁₆								
0FB6 ₁₆								
0FB7 ₁₆								
0FB8 ₁₆								
0FB9 ₁₆								
0FBA ₁₆								
0FBB ₁₆								
0FBC ₁₆								
0FBD ₁₆								
0FBE ₁₆								
0FBF ₁₆								
0FC0 ₁₆								
0FC1 ₁₆								
0FC2 ₁₆								
0FC3 ₁₆								
0FC4 ₁₆								
0FC5 ₁₆								
0FC6 ₁₆								
0FC7 ₁₆								
0FC8 ₁₆								
0FC9 ₁₆								
0FCA ₁₆								
0FCB ₁₆								
0FCC ₁₆								
0FCD ₁₆								
0FCE ₁₆								
0FCF ₁₆								
0FD0 ₁₆								
0FD1 ₁₆								
0FD2 ₁₆								
0FD3 ₁₆								
0FD4 ₁₆								
0FD5 ₁₆								
0FD6 ₁₆								
0FD7 ₁₆								
0FD8 ₁₆								
0FD9 ₁₆								
0FDA ₁₆								
0FDB ₁₆								
0FDC ₁₆								
0FDD ₁₆								
0FDE ₁₆								
0FDF ₁₆								
0FE0 ₁₆								
0FE1 ₁₆								
0FE2 ₁₆								
0FE3 ₁₆								
0FE4 ₁₆								
0FE5 ₁₆								
0FE6 ₁₆								
0FE7 ₁₆								
0FE8 ₁₆								
0FE9 ₁₆								
0FEA ₁₆								
0FEB ₁₆								
0FEC ₁₆								
0FED ₁₆								
0FEE ₁₆								
0FEF ₁₆								
0FF0 ₁₆								
0FF1 ₁₆								
0FF2 ₁₆								
0FF3 ₁₆								
0FF4 ₁₆								
0FF5 ₁₆								
0FF6 ₁₆								
0FF7 ₁₆								
0FF8 ₁₆								
0FF9 ₁₆								
0FFA ₁₆								
0FFB ₁₆								
0FFC ₁₆								
0FFD ₁₆								
0FFE ₁₆								
0FFF ₁₆								

Note:  shaded area is used for segment.
 shaded area is used for digit.

Address	7	6	5	4	3	2	1	0
0F60 ₁₆								
0F61 ₁₆								
0F62 ₁₆								
0F63 ₁₆								
0F64 ₁₆								
0F65 ₁₆								
0F66 ₁₆								
0F67 ₁₆								
0F68 ₁₆								
0F69 ₁₆								
0F6A ₁₆								
0F6B ₁₆								
0F6C ₁₆								
0F6D ₁₆								
0F6E ₁₆								
0F6F ₁₆								
0F70 ₁₆								
0F71 ₁₆								
0F72 ₁₆								
0F73 ₁₆								
0F74 ₁₆								
0F75 ₁₆								
0F76 ₁₆								
0F77 ₁₆								
0F78 ₁₆								
0F79 ₁₆								
0F7A ₁₆								
0F7B ₁₆								
0F7C ₁₆								
0F7D ₁₆								
0F7E ₁₆								
0F7F ₁₆								
0F80 ₁₆								
0F81 ₁₆								
0F82 ₁₆								
0F83 ₁₆								
0F84 ₁₆								
0F85 ₁₆								
0F86 ₁₆								
0F87 ₁₆								
0F88 ₁₆								
0F89 ₁₆								
0F8A ₁₆								
0F8B ₁₆								
0F8C ₁₆								
0F8D ₁₆								
0F8E ₁₆								
0F8F ₁₆								
0F90 ₁₆								
0F91 ₁₆								
0F92 ₁₆								
0F93 ₁₆								
0F94 ₁₆								
0F95 ₁₆								
0F96 ₁₆								
0F97 ₁₆								
0F98 ₁₆								
0F99 ₁₆								
0F9A ₁₆								
0F9B ₁₆								
0F9C ₁₆								
0F9D ₁₆								
0F9E ₁₆								
0F9F ₁₆								
0FA0 ₁₆								
0FA1 ₁₆								
0FA2 ₁₆								
0FA3 ₁₆								
0FA4 ₁₆								
0FA5 ₁₆								
0FA6 ₁₆								
0FA7 ₁₆								
0FA8 ₁₆								
0FA9 ₁₆								
0FAA ₁₆								
0FAB ₁₆								
0FAC ₁₆								
0FAD ₁₆								
0FAE ₁₆								
0FAF ₁₆								

The last timing
 (The last data of FLDP2)

FLDP2 data area

Timing for start
 (The first data of FLDP2)

The last timing
 (The last data of FLDP0)

FLDP0 data area

Timing for start
 (The first data of FLDP0)

The last timing
 (The last data of FLDP1)

FLDP1 data area

Fig. 48 Example of using FLD automatic display RAM in 32-timing mode

Setting Method When Using Grid Scan Type FLD

When using the grid scan type FLD, set "1" in the RAM area corresponding to the digit ports that output "1" at each timing. Set "0" in the RAM area corresponding to the other digit ports.

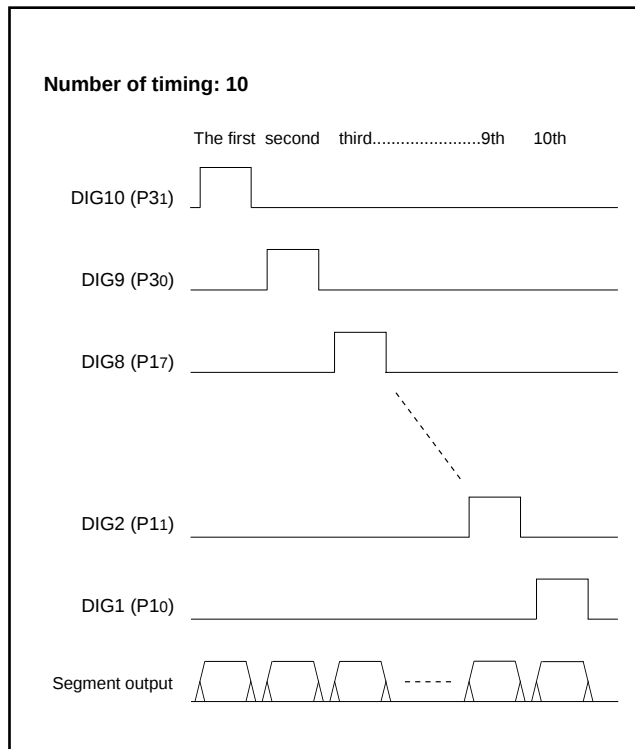


Fig. 49 Example of digit timing using grid scan type

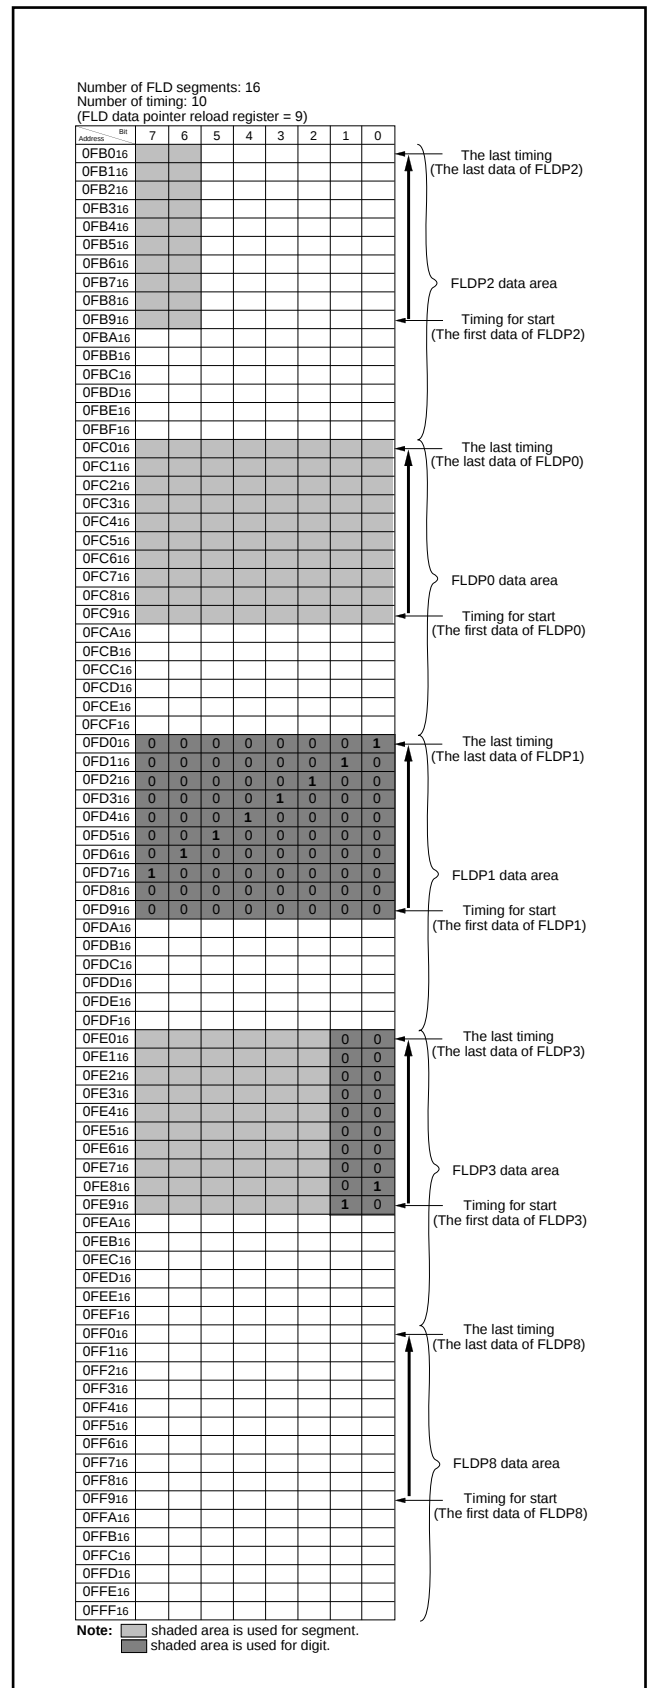


Fig. 50 Example of using FLD automatic display RAM using grid scan type

Timing Setting

Each timing is set by the FLDC mode register, Tdisp time set register, Toff1 time set register, and Toff2 time set register.

●Tdisp time setting

Set the Tdisp time by the Tdisp counter count source selection bit of the FLDC mode register and the Tdisp time set register. Supposing that the value of the Tdisp time set register is n, the Tdisp time is represented as $Tdisp = (n+1) \times t$ (t: count source synchronization).

When the Tdisp counter count source selection bit of the FLDC mode register is "0" and the value of the Tdisp time set register is 200 (C8₁₆), the Tdisp time is: $Tdisp = (200+1) \times 4$ (at $X_{IN} = 4$ MHz) = 804 μs. When reading the Tdisp time set register, the value in the counter is read out.

●Toff1 time setting

Set the Toff1 time by the Toff1 time set register.

Supposing that the value of the Toff1 time set register is n1, the Toff1 time is represented as $Toff1 = n1 \times t$.

When the Tdisp counter count source selection bit of the FLDC mode register is "0" and the value of the Toff1 time set register is 30 (1E₁₆), $Toff1 = 30 \times 4$ (at $X_{IN} = 4$ MHz) = 120 μs.

Set a value of 03₁₆ or more to the Toff1 time set register (address 0EF6₁₆).

●Toff2 time setting

Set the Toff2 time by the Toff2 time set register.

Supposing that the value of the Toff2 time set register is n2, the Toff2 time is represented as $Toff2 = n2 \times t$.

When the Tdisp counter count source selection bit of the FLDC mode register is "0" and the value of the Toff2 time set register is 180 (B4₁₆), $Toff2 = 180 \times 4$ (at $X_{IN} = 4$ MHz) = 720 μs.

This Toff2 time setting is valid only for FLD ports which are in the gradation display mode and whose gradation display control RAM value is "1".

When setting "1" to bit 7 of the P8FLD output control register (address 0EFC₁₆), set a value of 03₁₆ or more to the Toff2 time set register (address 0EF7₁₆).

FLD Automatic Display Start

To perform FLD automatic display, set the following registers.

- Port P0FLD/port switch register
- Port P2FLD/port switch register
- Port P8FLD/port switch register
- FLDC mode register
- Tdisp time set register
- Toff1 time set register
- Toff2 time set register
- FLD data pointer

FLD automatic display mode is selected by writing "1" to the bit 0 of the FLDC mode register (address 0EF4₁₆), and the automatic display is started by writing "1" to bit 1. During FLD automatic display, bit 1 of the FLDC mode register (address 0EF4₁₆) always keeps "1", and FLD automatic display can be interrupted by writing "0" to bit 1.

Key-scan

When a key-scan is performed with the segment during key-scan blanking period Tscan, take the following sequence:

1. Write "0" to bit 0 of the FLDC mode register (address 0EF4₁₆).
2. Set the port corresponding to the segment for key-scan to the output port.
3. Perform the key-scan.
4. After the key-scan is performed, write "1" to bit 0 of FLDC mode register (address 0EF4₁₆).

■ Note

When performing a key-scan according to the above step 1 to 4, take the following points into consideration.

1. Do not set "0" in bit 1 of the FLDC mode register (address 0EF4₁₆).
2. Do not set "1" in the ports corresponding to digits.

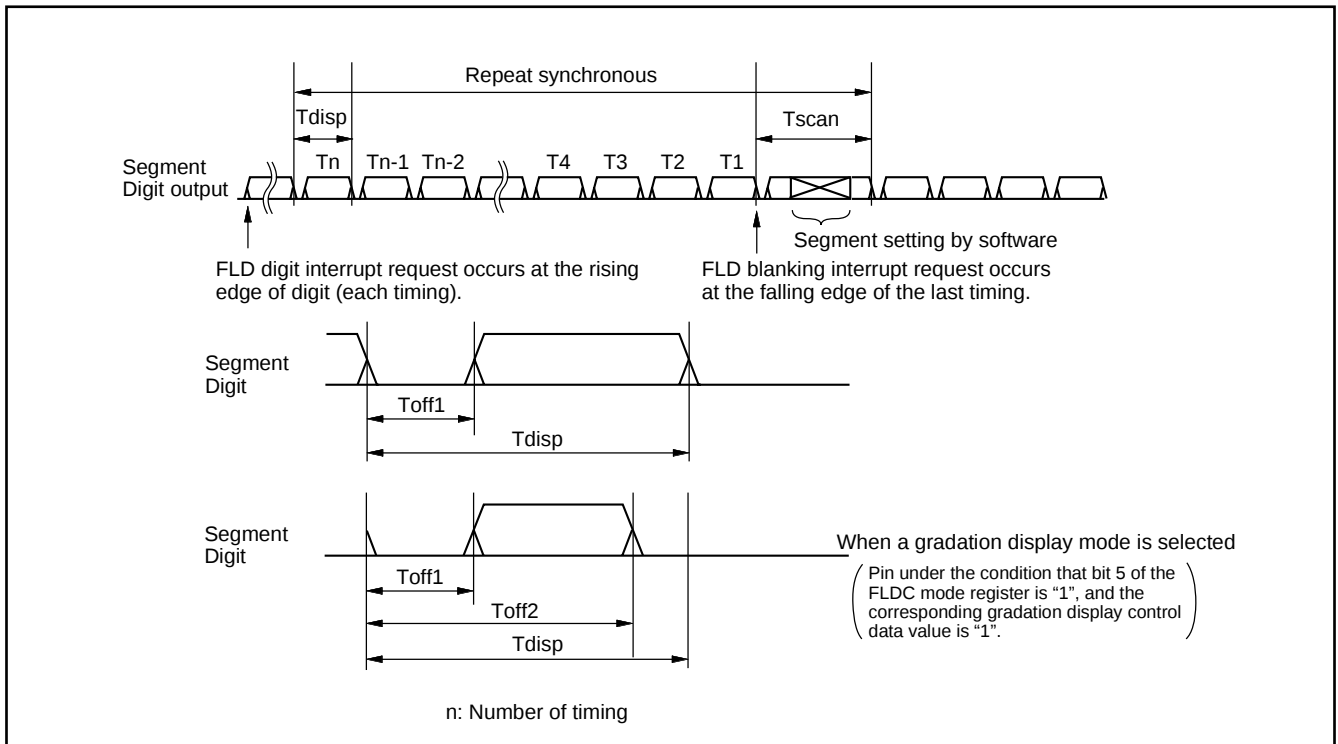


Fig. 51 FLDC timing

P84 to P87 FLD Output Reverse Function

P84 to P87 are provided with a function to reverse the polarity of the FLD output. This function is useful in adjusting the polarity when using an externally installed driver.

The output polarity can be reversed by setting "1" to bit 0 of the port P8 FLD output control register.

P84 to P87 Toff Invalid Function

P84 to P87 can output waveform in which Toff is invalid, when P84 to P87 is selected FLD ports (See Figure 52).

The function is useful when using a 4 bits →16 bits decoder. The Toff can be invalid by setting "1" to bit 2 of the port P8FLD output control register (address 0EFC16).

P84 to P87 Output Delay Function

P84 to P87 can output waveform in which is delayed for 16 μs, when selecting FLD port and selecting Toff invalid function (See Figure 52). When using a 4 bits →16 bits decoder, the function can be useful for prevention of leak radiation caused by phase discrepancy between segment output waveform and digit output waveform. This function can be set by setting "1" to bit 3 of the port P8FLD output control register (address 0EFC16).

Dimmer Signal Output Function

P63 can output the dimmer signal. When using a 4 bits →16 bits decoder, the dimmer signal can be used as a control signal for a 4 bits →16 bits decoder. When using M35501FP, the dimmer signal can be used as the CLK signal. The dimmer signal can be output by setting "1" to bit 4 of the port P8FLD output control register (address 0EFC16).

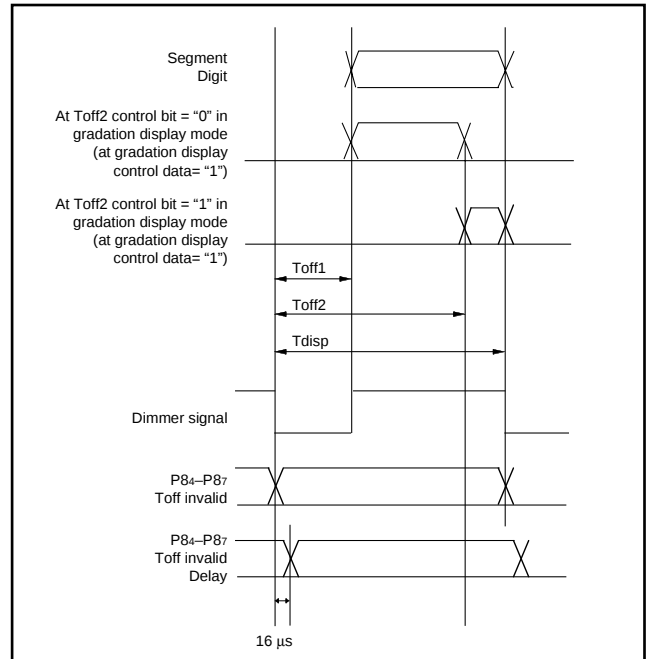


Fig. 52 P84 to P87 FLD output waveform

Toff2 Control Bit

The value of the Toff2 time set register is valid when gradation display mode is selected. The FLD ports output (set) the data of display RAM at the end of the Toff1 time and output "0" (reset) at the end of the Toff2 time, when bit 7 of the port P8FLD output control register is "0".

The FLD ports output (set) the data of display RAM at the end of the Toff2 time and output "0" (reset) at the end of Tdisp time, when bit 7 of the port P8FLD output control register is "1".

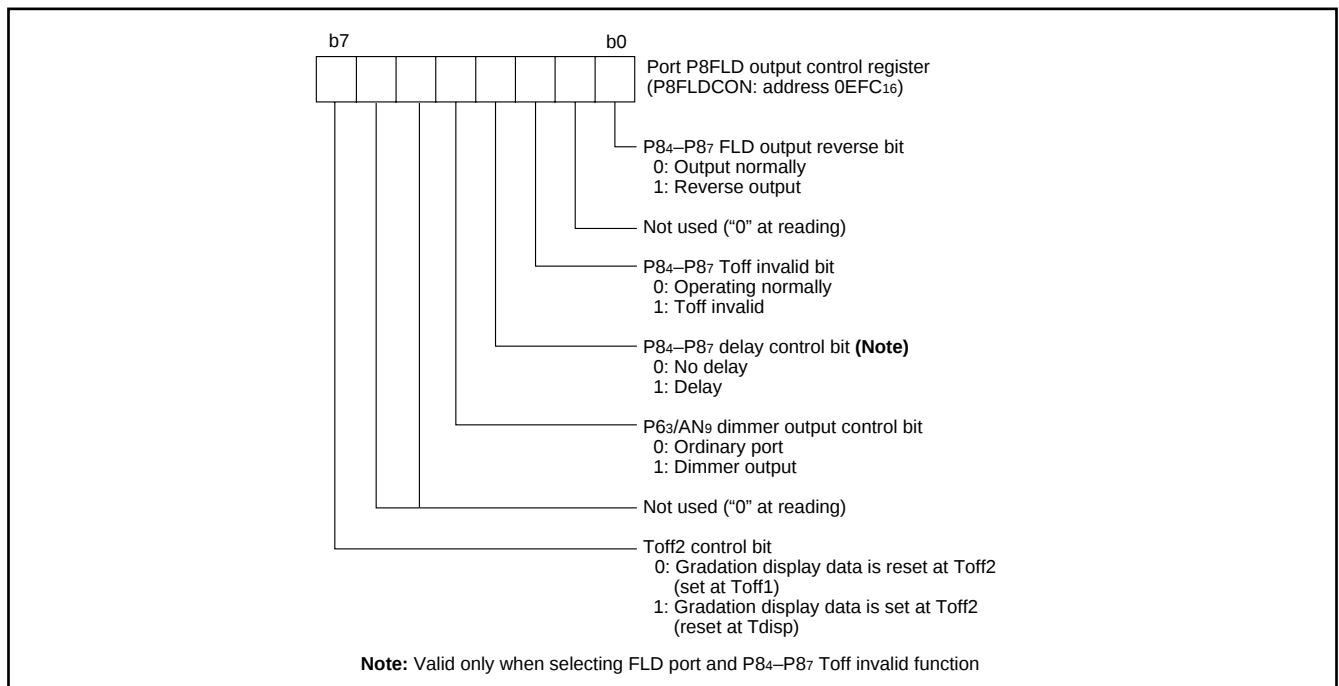


Fig. 53 Structure of port P8 FLD output control register

A-D CONVERTER

The 38B4 group has a 10-bit A-D converter. The A-D converter performs successive approximation conversion.

[A-D Conversion Register] AD

One of these registers is a high-order register, and the other is a low-order register. The high-order 8 bits of a conversion result is stored in the A-D conversion register (high-order) (address 0034₁₆), and the low-order 2 bits of the same result are stored in bit 7 and bit 6 of the A-D conversion register (low-order) (address 0033₁₆). During A-D conversion, do not read these registers.

[A-D Control Register] ADCON

This register controls A-D converter. Bits 3 to 0 are analog input pin selection bits. Bit 4 is an AD conversion completion bit and "0" during A-D conversion. This bit is set to "1" upon completion of A-D conversion.

A-D conversion is started by setting "0" in this bit.

[Comparison Voltage Generator]

The comparison voltage generator divides the voltage between AV_{SS} and VREF, and outputs the divided voltages.

[Channel Selector]

The channel selector selects one of the input ports P7₇/AN₇–P7₀/AN₀, and P6₅/SSTB₁/AN₁₁–P6₂/SRDY₁/AN₈ and inputs it to the comparator.

When port P6₄ is selected as an analog input pin, an external interrupt function (INT₄) is invalid.

[Comparator and Control Circuit]

The comparator and control circuit compares an analog input voltage with the comparison voltage and stores the result in the A-D conversion register. When an A-D conversion is completed, the control circuit sets the AD conversion completion bit and the AD

conversion interrupt request bit to "1".

Note that the comparator is constructed linked to a capacitor, so set f(X_{IN}) to at least 250 kHz during A-D conversion. Use a CPU system clock dividing the main clock X_{IN} as the internal system clock.

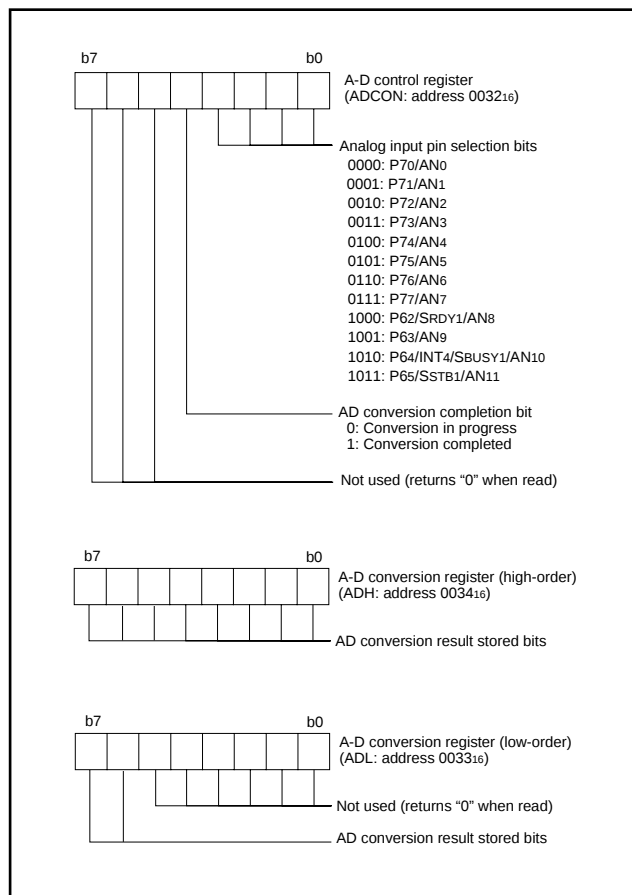


Fig. 54 Structure of A-D control register

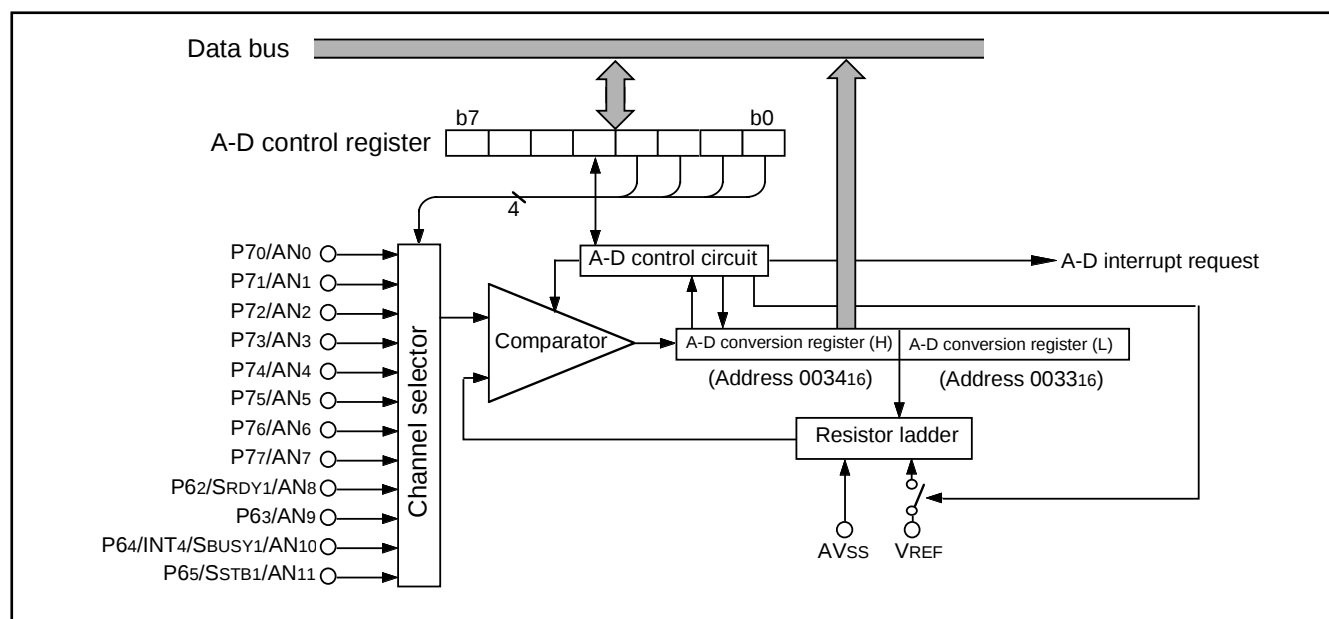


Fig. 55 Block diagram of A-D converter

PULSE WIDTH MODULATION (PWM)

The 38B4 group has a PWM function with a 14-bit resolution. When the oscillation frequency X_{IN} is 4 MHz, the minimum resolution bit width is 250 ns and the cycle period is 4096 μ s. The PWM timing generator supplies a PWM control signal based on a signal that is the frequency of the X_{IN} clock.

The explanation in the rest assumes $X_{IN} = 4$ MHz.

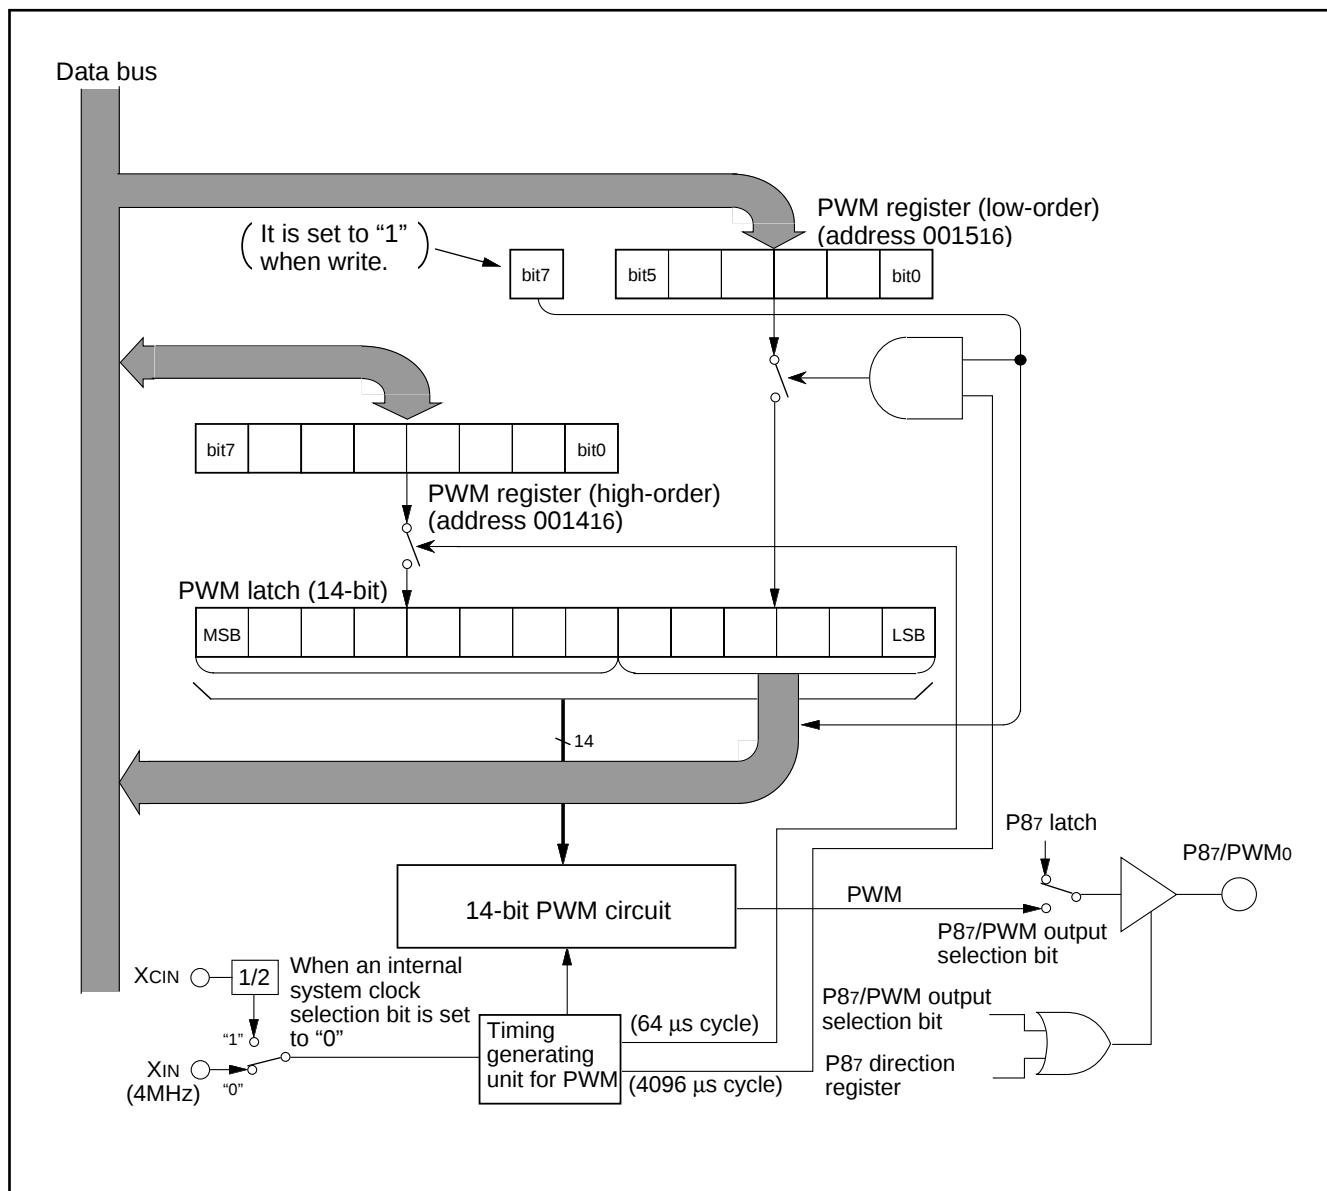


Fig. 56 PWM block diagram

Data Setup

The PWM output pin also function as port P87. Set port P87 to be the PWM output pin by setting bit 0 of the PWM control register (address 0026₁₆) to "1". The high-order 8 bits of output data are set in the high-order PWM register PWMH (address 0014₁₆) and the low-order 6 bits are set in the low-order PWM register PWML (address 0015₁₆).

PWM Operation

The timing of the 14-bit PWM function is shown in Figure 57.

The 14-bit PWM data is divided into the low-order 6 bits and the high-order 8 bits in the PWM latch.

The high-order 8 bits of data determine how long an "H" level signal is output during each sub-period. There are 64 sub-periods in each period, and each sub-period t is $256 \times \tau$ ($= 64 \mu\text{s}$) long. The signal's "H" has a length equal to N times τ , and its minimum resolution = 250 ns.

The last bit of the sub-period becomes the ADD bit which is specified either "H" or "L", by the contents of PWML. As shown in Table 10, the ADD bit is decided either "H" or "L".

That is, only in the sub-period t_m shown in Table 10 in the PWM cycle period $T = 64t$, the "H" duration is lengthened during the minimum resolution width τ period in comparison with the other period. For example, if the high-order eight bits of the 14-bit data are "03₁₆" and the low-order six bits are "05₁₆", the length of the "H" level output in sub-periods t_8 , t_{24} , t_{32} , t_{40} and t_{56} is 4τ , and its length 3τ in all other sub-periods.

Time at the "H" level of each sub-period almost becomes equal because the time becomes length set in the high-order 8 bits or becomes the value plus τ , and this sub-period t ($= 64 \mu\text{s}$, approximate 15.6 kHz) becomes cycle period approximately.

Transfer From Register To Latch

Data written to the PWML register is transferred to the PWM latch once in each PWM period (every 4096 μs), and data written to the PWMH register is transferred to the PWM latch once in each sub-period (every 64 μs). When the PWML register is read, the contents of the latch are read. However, bit 7 of the PWML register indicates whether the transfer to the PWM latch is completed; the transfer is completed when bit 7 is "0".

Table 10 Relationship between low-order 6-bit data and setting period of ADD bit

Low-order 6-bit data	Sub-periods t_m lengthened ($m = 0$ to 63)
0 0 0 0 0 0 ^{LSB}	None
0 0 0 0 0 1	$m = 32$
0 0 0 0 1 0	$m = 16, 48$
0 0 0 1 0 0	$m = 8, 24, 40, 56$
0 0 1 0 0 0	$m = 4, 12, 20, 28, 36, 44, 52, 60$
0 1 0 0 0 0	$m = 2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62$
1 0 0 0 0 0	$m = 1, 3, 5, 7, \dots, 57, 59, 61, 63$

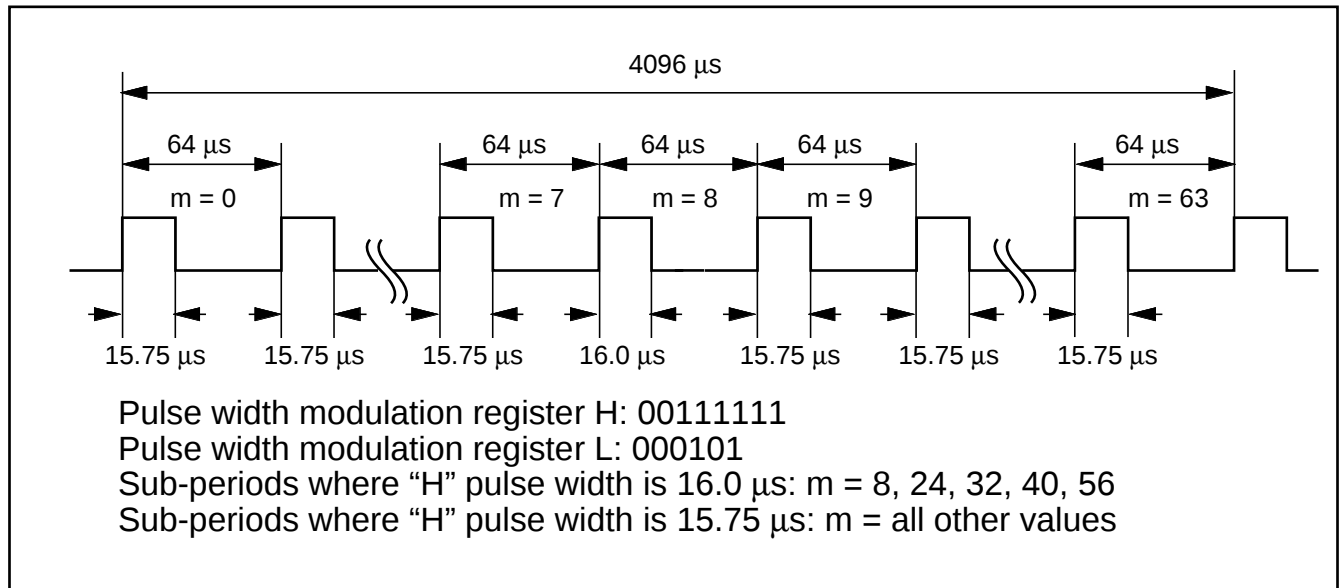


Fig. 57 PWM timing

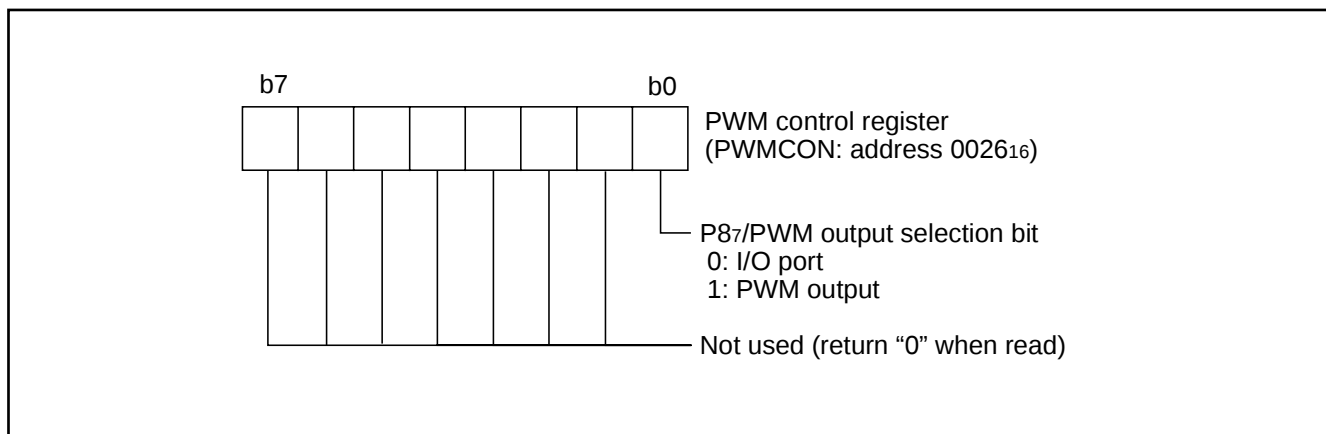


Fig. 58 Structure of PWM control register

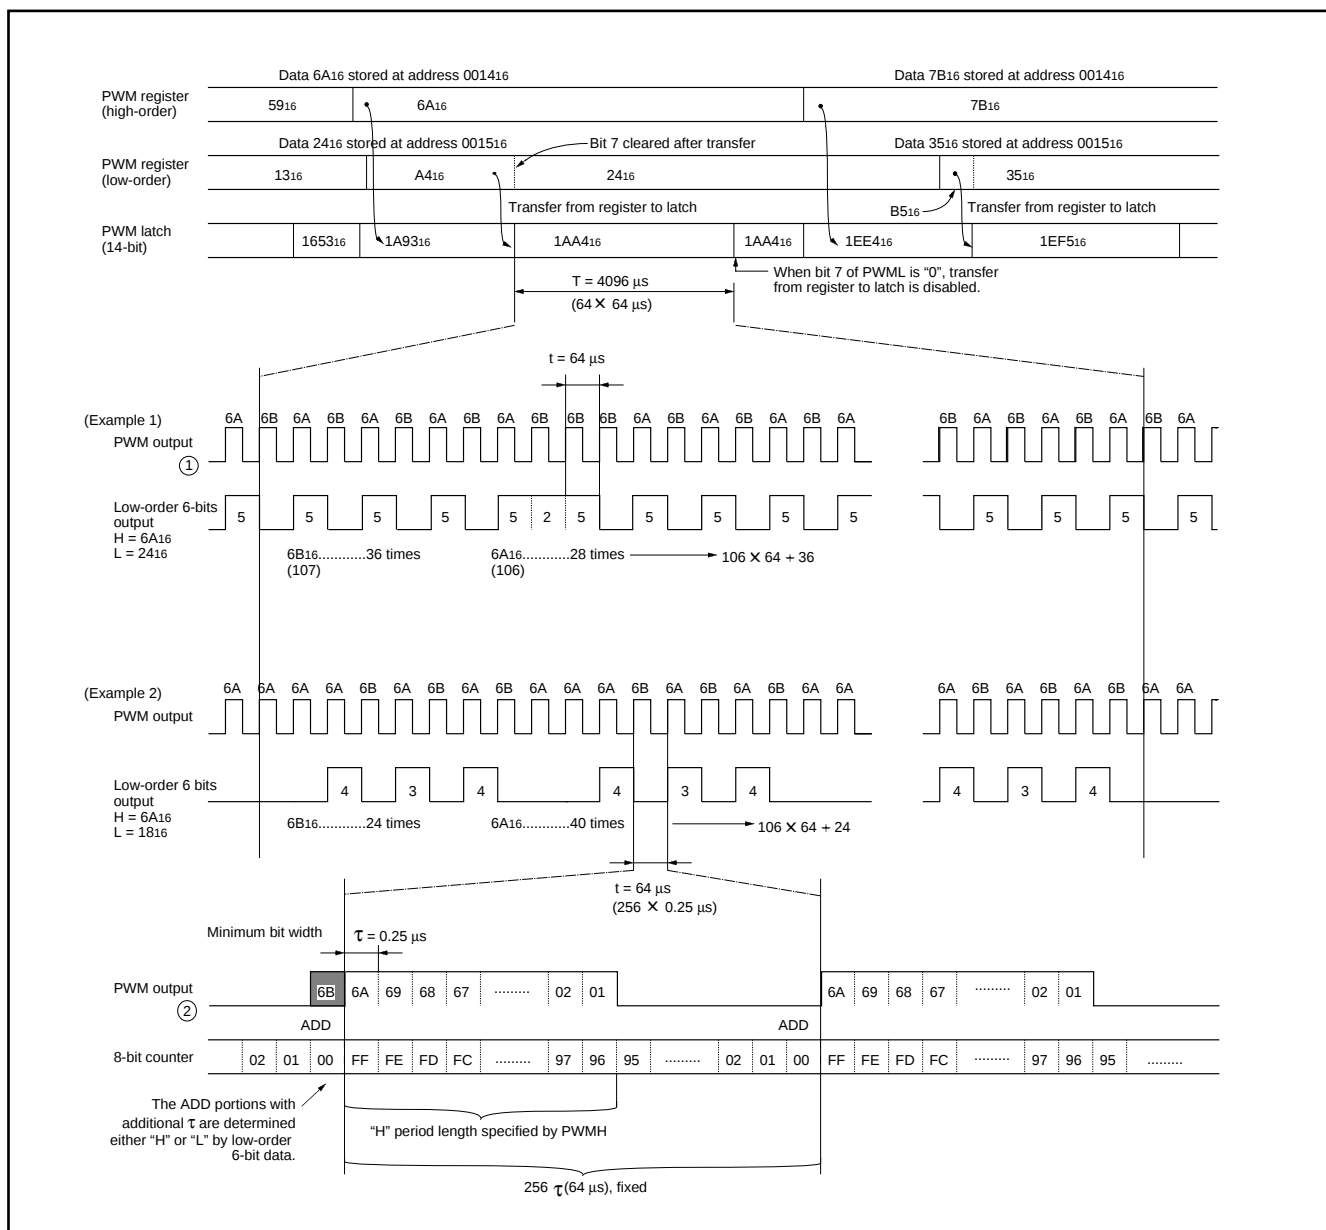


Fig. 59 14-bit PWM timing

INTERRUPT INTERVAL DETERMINATION FUNCTION

The 38B4 group has an interrupt interval determination circuit.

This interrupt interval determination circuit has an 8-bit binary up counter. Using this counter, it determines a duration of time from the rising edge (falling edge) of an input signal pulse on the P47/INT2 pin to the rising edge (falling edge) of the signal pulse that is input next. How to determine the interrupt interval is described below.

1. Enable the INT2 interrupt by setting bit 2 of the interrupt control register 1 (address 003E₁₆). Select the rising interval or falling interval by setting bit 2 of the interrupt edge selection register (address 003A₁₆).
2. Set bit 0 of the interrupt interval determination control register (address 0031₁₆) to "1" (interrupt interval determination operating).
3. Select the sampling clock of 8-bit binary up counter by setting bit 1 of the interrupt interval determination control register. When writing "0", $f(X_{IN})/128$ is selected (the sampling interval: 32 μ s at $f(X_{IN}) = 4.19$ MHz); when "1", $f(X_{IN})/256$ is selected (the sampling interval: 64 μ s at $f(X_{IN}) = 4.19$ MHz).
4. When the signal of polarity which is set on the INT2 pin (rising or falling edge) is input, the 8-bit binary up counter starts counting up of the selected counter sampling clock.
5. When the signal of polarity above 4 is input again, the value of the 8-bit binary up counter is transferred to the interrupt interval determination register (address 0030₁₆), and the remote control interrupt request occurs. Immediately after that, the 8-bit binary up counter continues to count up again from "00₁₆".
6. When count value reaches "FF₁₆", the 8-bit binary up counter stops counting up. Then, simultaneously when the next counter sampling clock is input, the counter sets value "FF₁₆" to the interrupt interval determination register to generate the counter overflow interrupt request.

Noise Filter

The P47/INT2 pin builds in the noise filter.

The noise filter operation is described below.

1. Select the sampling clock of the input signal with bits 2 and 3 of the interrupt interval determination control register. When not using the noise filter, set "00".
2. The P47/INT2 input signal is sampled in synchronization with the selected clock. When sampling the same level signal in a series of three sampling, the signal is recognized as the interrupt signal, and the interrupt request occurs.

When setting bit 4 of interrupt interval determination control register to "1", the interrupt request can occur at both rising and falling edges.

When using the noise filter, set the minimum pulse width of the INT2 input signal to 3 cycles or more of the sample clock.

Note: In the low-speed mode ($CM7 = 1$), the interrupt interval determination function cannot operate.

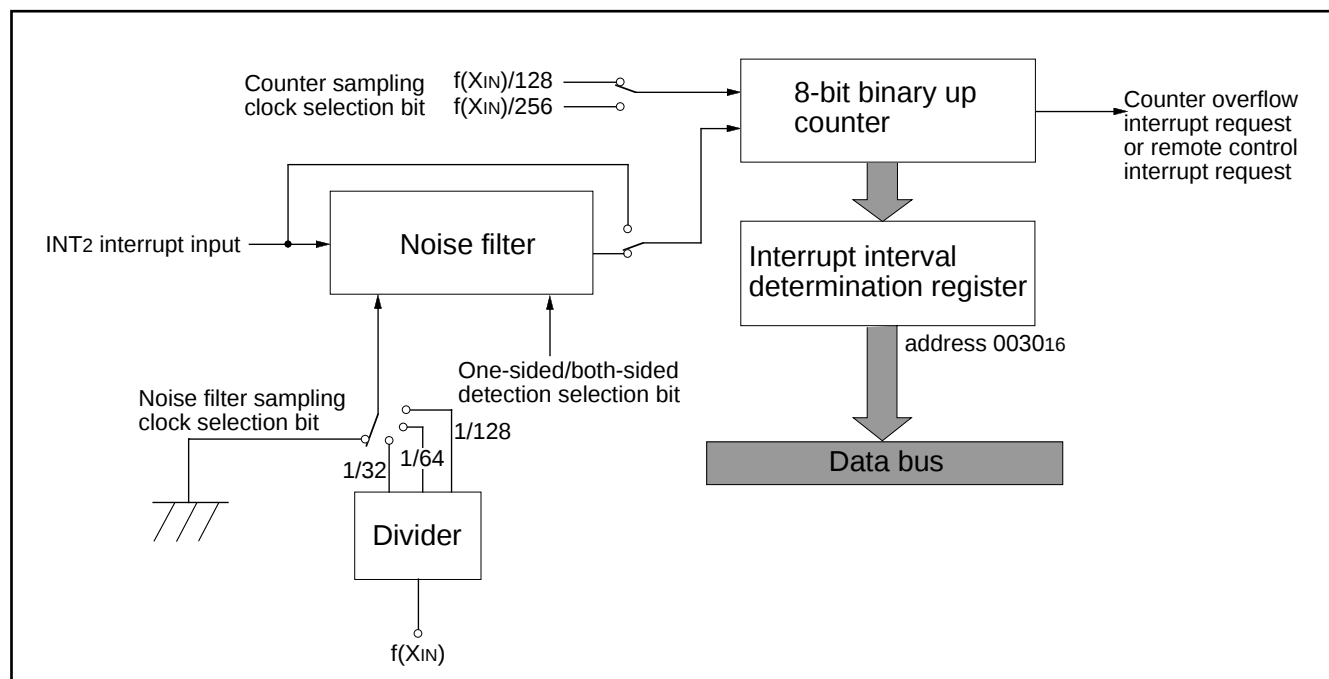


Fig. 60 Interrupt interval determination circuit block diagram

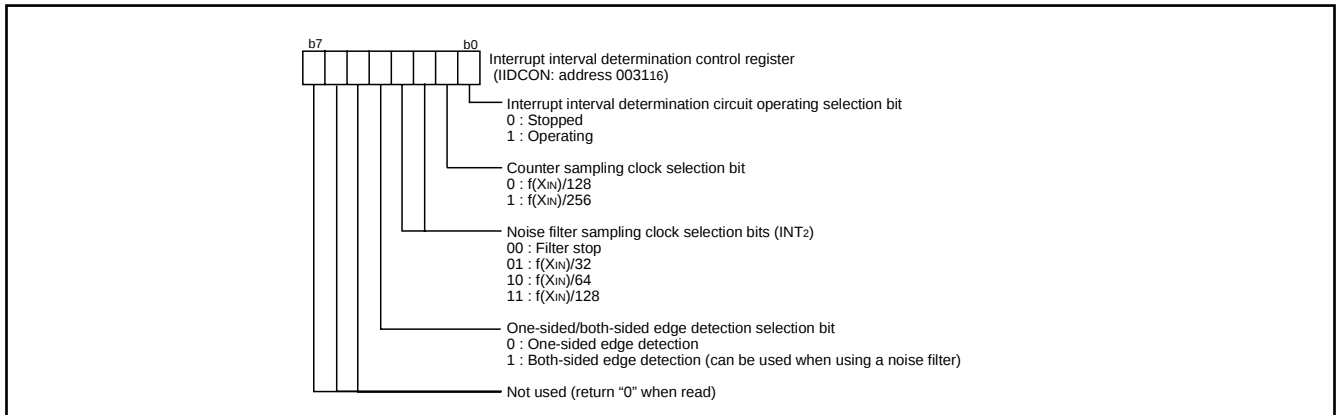


Fig. 61 Structure of interrupt interval determination control register

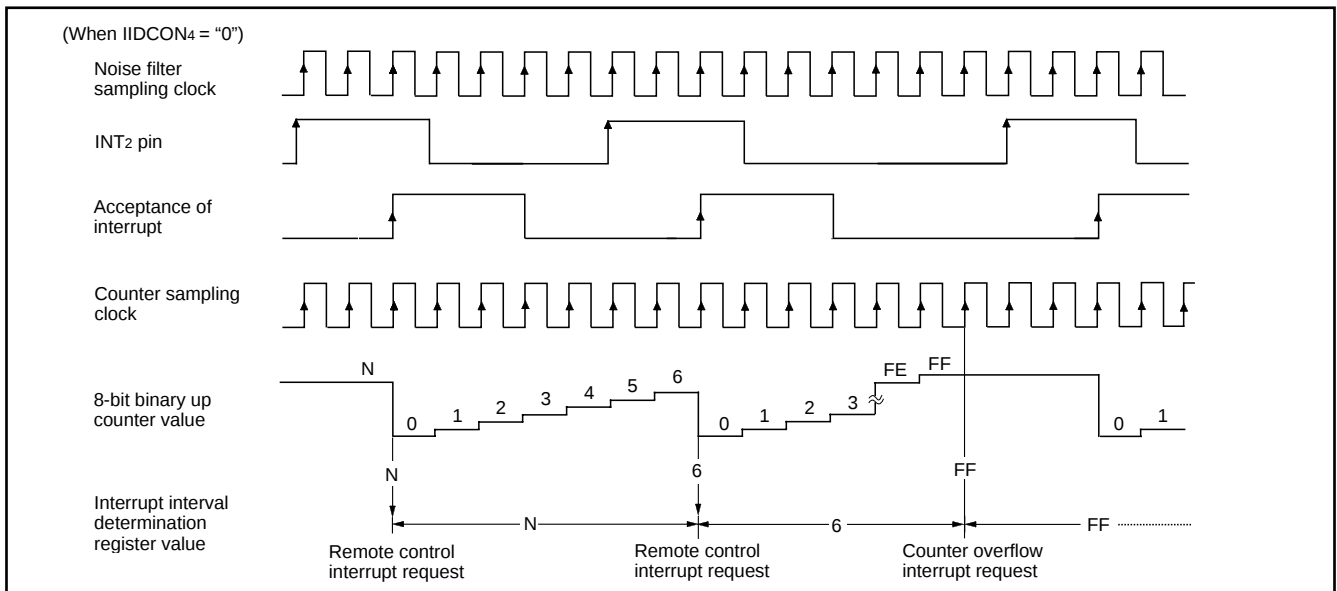


Fig. 62 Interrupt interval determination operation example (at rising edge active)

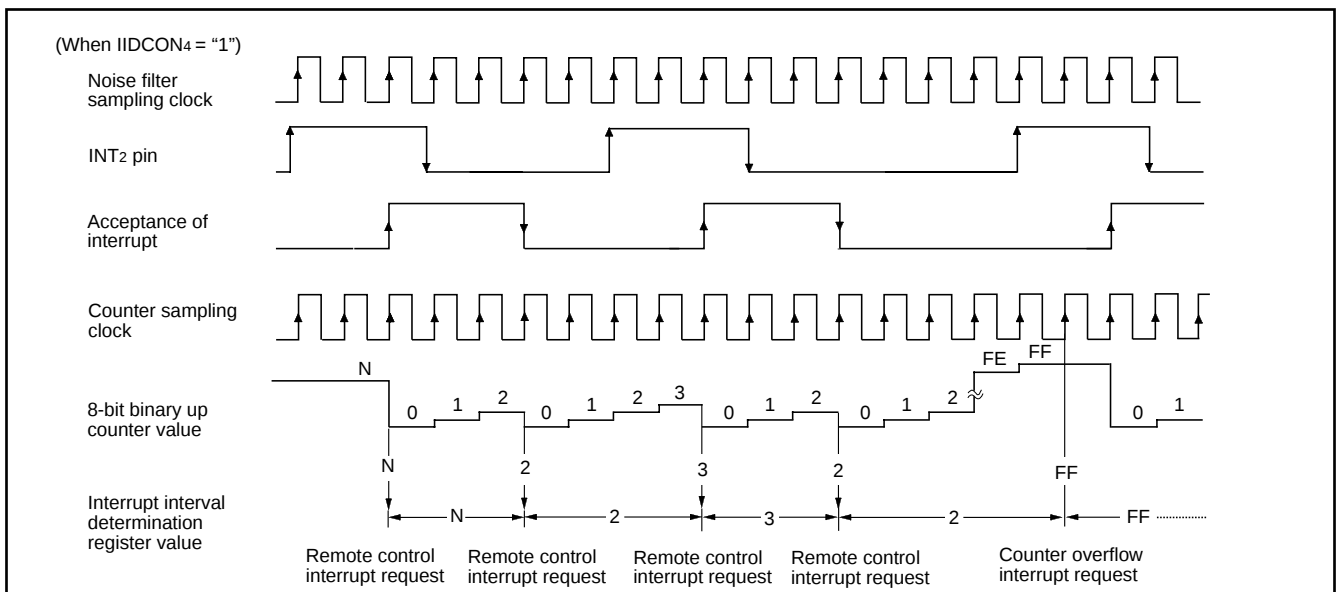


Fig. 63 Interrupt interval determination operation example (at both-sided edge active)

WATCHDOG TIMER

The watchdog timer gives a mean of returning to the reset status when a program cannot run on a normal loop (for example, because of a software runaway). The watchdog timer consists of an 8-bit watchdog timer L and a 12-bit watchdog timer H.

Standard Operation Of Watchdog Timer

When any data is not written into the watchdog timer control register (address 002B₁₆) after resetting, the watchdog timer is in the stop state. The watchdog timer starts to count down by writing an optional value into the watchdog timer control register (address 002B₁₆) and an internal reset occurs at an underflow of the watchdog timer H. Accordingly, programming is usually performed so that writing to the watchdog timer control register (address 002B₁₆) may be started before an underflow. When the watchdog timer control register (address 002B₁₆) is read, the values of the high-order 6 bits of the watchdog timer H, STP instruction disable bit, and watchdog timer H count source selection bit are read.

●Initial value of watchdog timer

At reset or writing to the watchdog timer control register (address 002B₁₆), a watchdog timer H is set to "FFF₁₆" and a watchdog timer L to "FF₁₆".

●Watchdog timer H count source selection bit operation

Bit 7 of the watchdog timer control register (address 002B₁₆) permits selecting a watchdog timer H count source. When this bit is set to

"0", the underflow signal of watchdog timer L becomes the count source. The detection time is set then to $f(X_{IN}) = 2.1 \text{ s}$ at 4 MHz frequency and $f(X_{CIN}) = 512 \text{ s}$ at 32 kHz frequency.

When this bit is set to "1", the count source becomes the signal divided by 8 for $f(X_{IN})$ (or divided by 16 for $f(X_{CIN})$). The detection time in this case is set to $f(X_{IN}) = 8.2 \text{ ms}$ at 4 MHz frequency and $f(X_{CIN}) = 2 \text{ s}$ at 32 KHz frequency. This bit is cleared to "0" after resetting.

●Operation of STP instruction disable bit

Bit 6 of the watchdog timer control register (address 002B₁₆) permits disabling the STP instruction when the watchdog timer is in operation.

When this bit is "0", the STP instruction is enabled.

When this bit is "1", the STP instruction is disabled.

Once the STP instruction is executed, an internal resetting occurs.

When this bit is set to "1", it cannot be rewritten to "0" by program. This bit is cleared to "0" after resetting.

■ Note

When releasing the stop mode, the watchdog timer performs its count operation even in the stop release waiting time. Be careful not to cause the watchdog timer H to underflow in the stop release waiting time, for example, by writing data in the watchdog timer control register (address 002B₁₆) before executing the STP instruction.

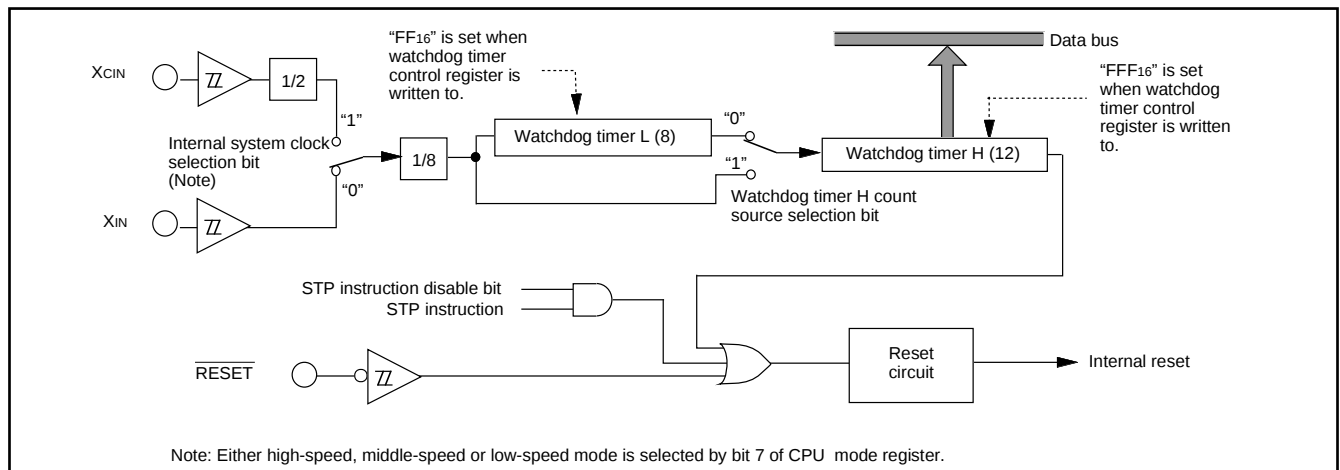


Fig. 64 Block diagram of watchdog timer

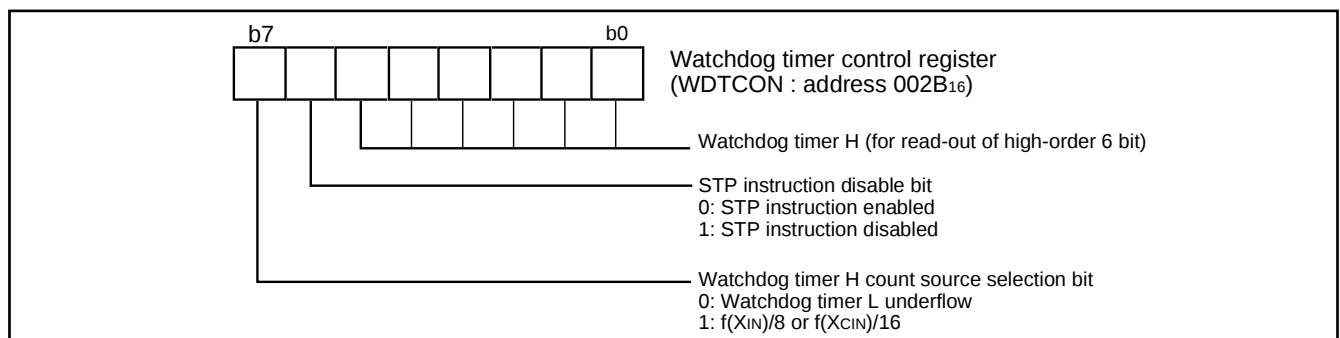


Fig. 65 Structure of watchdog timer control register

BUZZER OUTPUT CIRCUIT

The 38B4 group has a buzzer output circuit. One of 1 kHz, 2 kHz and 4 kHz (at $X_{IN} = 4.19$ MHz) frequencies can be selected by the buzzer output control register (address 0EFD16). Either P4₃/BUZ01 or P2₀/BUZ02/FLD0 can be selected as a buzzer output port by the output port selection bits (b2 and b3 of address 0EFD16).

The buzzer output is controlled by the buzzer output ON/OFF bit (b4).

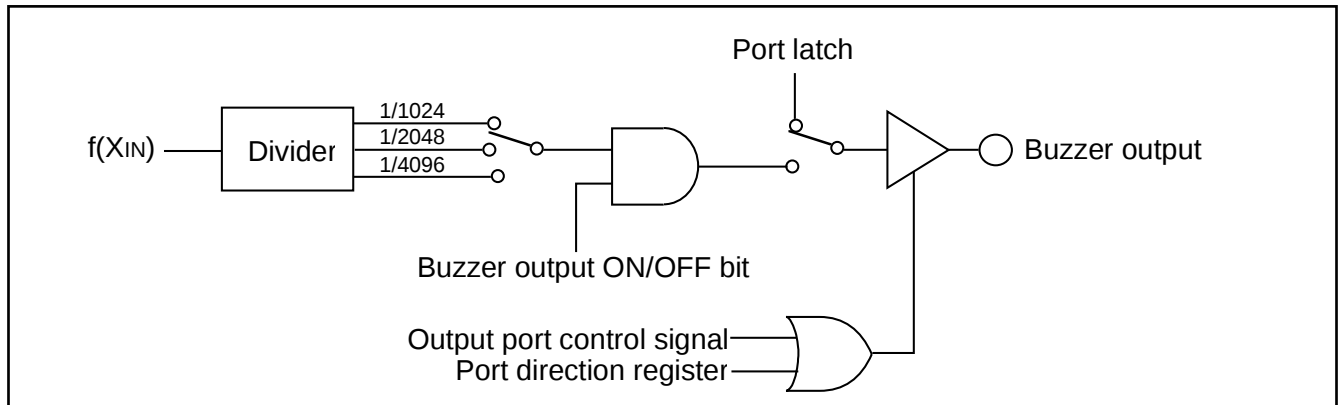


Fig. 66 Block diagram of buzzer output circuit

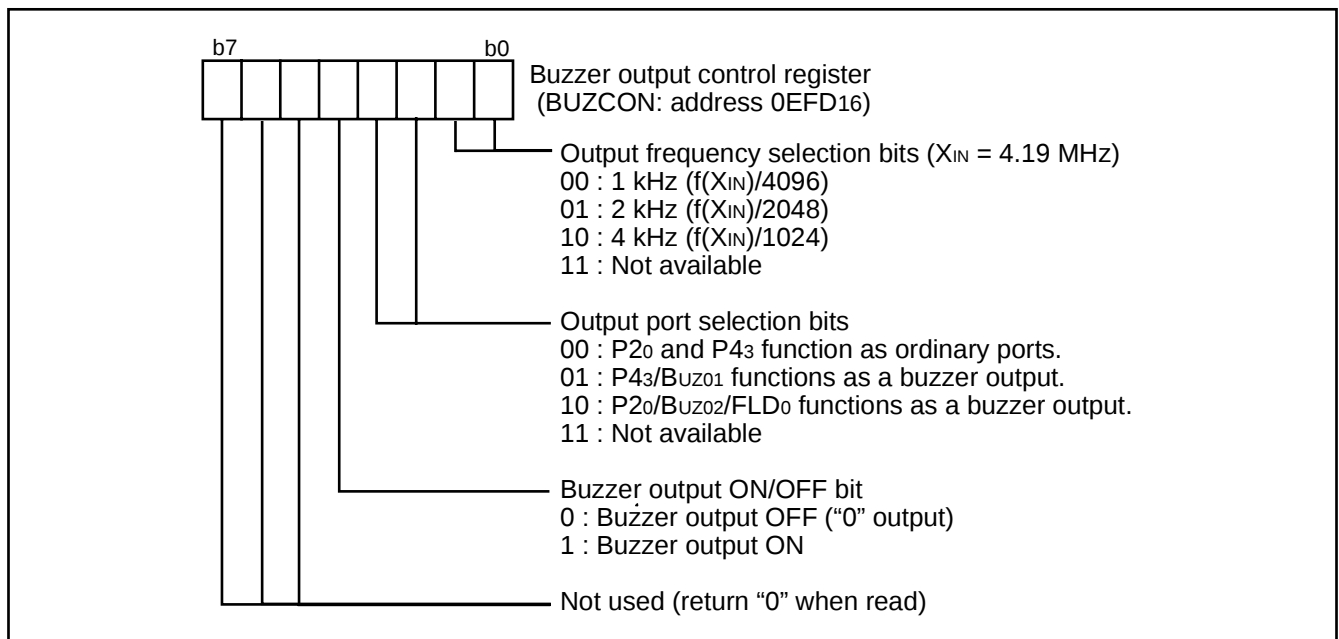


Fig. 67 Structure of buzzer output control register

RESET CIRCUIT

To reset the microcomputer, $\overline{\text{RESET}}$ pin should be held at an "L" level for 2 μs or more. Then the $\overline{\text{RESET}}$ pin is returned to an "H" level (the power source voltage should be between 2.7 V and 5.5 V, and the oscillation should be stable), reset is released. After the reset is completed, the program starts from the address contained in address FFFD_{16} (high-order byte) and address FFFC_{16} (low-order byte). Make sure that the reset input voltage is less than 0.5 V for V_{CC} of 2.7 V (switching to the high-speed mode, a power source voltage must be between 4.0 V and 5.5 V).

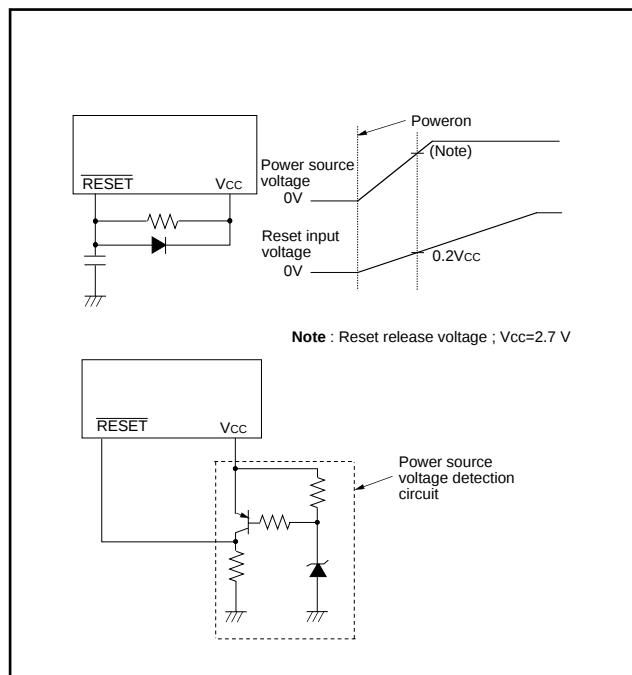


Fig. 68 Reset circuit example

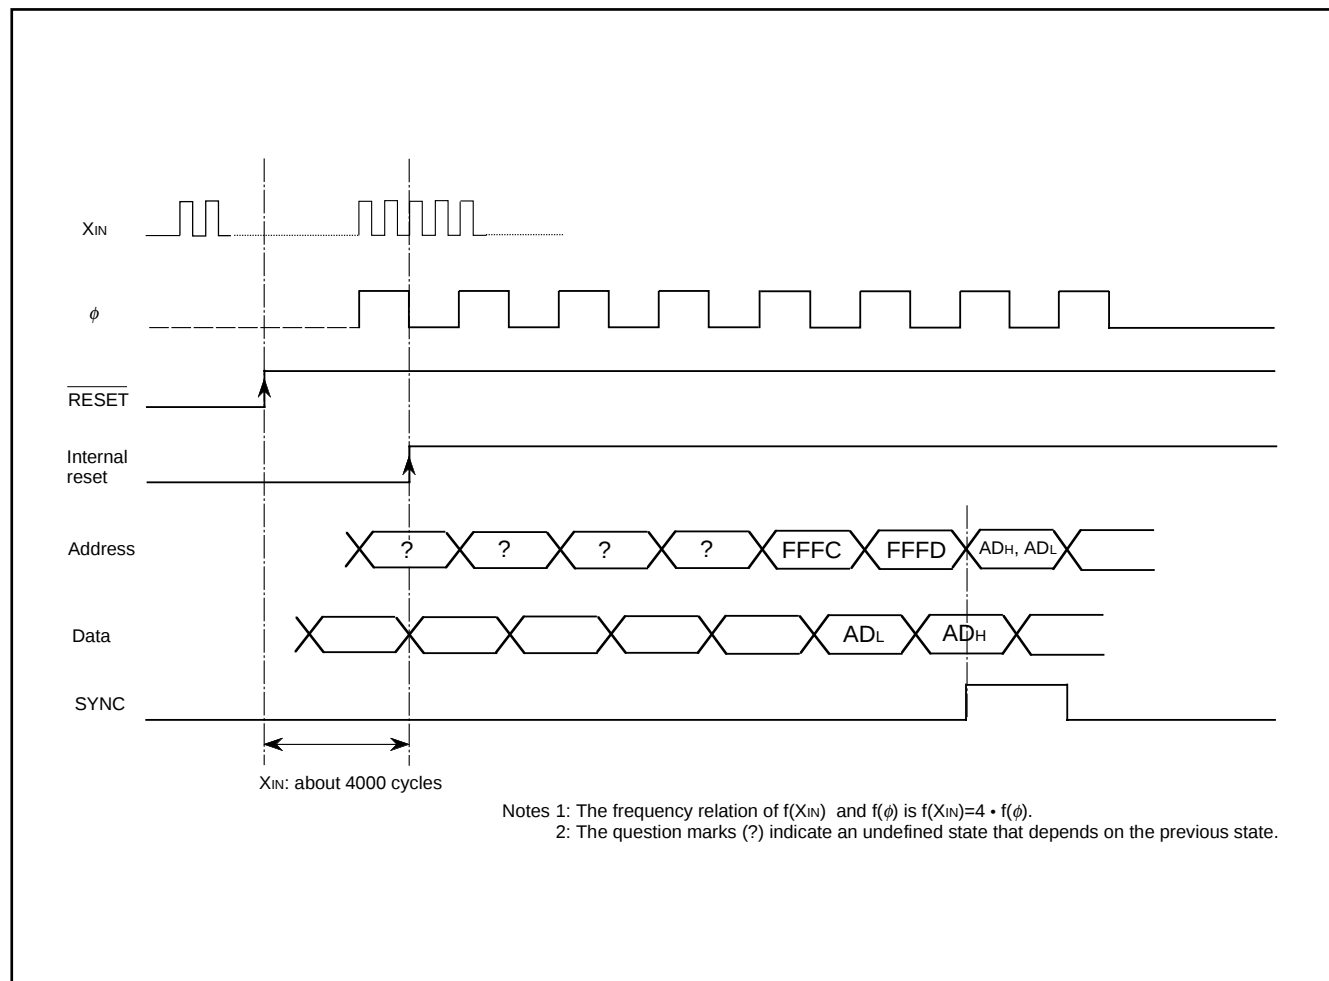


Fig. 69 Reset sequence

	Address	Register contents		Address	Register contents
(1) Port P0	0000 ₁₆	00 ₁₆	(33) Timer 34 mode register	0029 ₁₆	00 ₁₆
(2) Port P0 direction register	0001 ₁₆	00 ₁₆	(34) Timer 56 mode register	002A ₁₆	00 ₁₆
(3) Port P1	0002 ₁₆	00 ₁₆	(35) Watchdog timer control register	002B ₁₆	3F ₁₆
(4) Port P2	0004 ₁₆	00 ₁₆	(36) Timer X (low-order)	002C ₁₆	FF ₁₆
(5) Port P2 direction register	0005 ₁₆	00 ₁₆	(37) Timer X (high-order)	002D ₁₆	FF ₁₆
(6) Port P3	0006 ₁₆	00 ₁₆	(38) Timer X mode register 1	002E ₁₆	00 ₁₆
(7) Port P4	0008 ₁₆	00 ₁₆	(39) Timer X mode register 2	002F ₁₆	00 ₁₆
(8) Port P4 direction register	0009 ₁₆	00 ₁₆	(40) Interrupt interval determination control register	0031 ₁₆	00 ₁₆
(9) Port P5	000A ₁₆	00 ₁₆	(41) A-D control register	0032 ₁₆	10 ₁₆
(10) Port P5 direction register	000B ₁₆	00 ₁₆	(42) Interrupt source switch register	0039 ₁₆	00 ₁₆
(11) Port P6	000C ₁₆	00 ₁₆	(43) Interrupt edge selection register	003A ₁₆	00 ₁₆
(12) Port P6 direction register	000D ₁₆	00 ₁₆	(44) CPU mode register	003B ₁₆	0 1 0 0 1 0 0 0
(13) Port P7	000E ₁₆	00 ₁₆	(45) Interrupt request register 1	003C ₁₆	00 ₁₆
(14) Port P7 direction register	000F ₁₆	00 ₁₆	(46) Interrupt request register 2	003D ₁₆	00 ₁₆
(15) Port P8	0010 ₁₆	00 ₁₆	(47) Interrupt control register 1	003E ₁₆	00 ₁₆
(16) Port P8 direction register	0011 ₁₆	00 ₁₆	(48) Interrupt control register 2	003F ₁₆	00 ₁₆
(17) Port P9	0012 ₁₆	00 ₁₆	(49) Pull-up control register 1	0EF0 ₁₆	00 ₁₆
(18) Port P9 direction register	0013 ₁₆	00 ₁₆	(50) Pull-up control register 2	0EF1 ₁₆	00 ₁₆
(19) UART control register	0017 ₁₆	80 ₁₆	(51) FLDC mode register	0EF4 ₁₆	00 ₁₆
(20) Serial I/O1 control register 1	0019 ₁₆	00 ₁₆	(52) Tdisp time set register	0EF5 ₁₆	00 ₁₆
(21) Serial I/O1 control register 2	001A ₁₆	00 ₁₆	(53) Toff1 time set register	0EF6 ₁₆	FF ₁₆
(22) Serial I/O1 control register 3	001C ₁₆	00 ₁₆	(54) Toff2 time set register	0EF7 ₁₆	FF ₁₆
(23) Serial I/O2 control register	001D ₁₆	00 ₁₆	(55) Port P0FLD/port switch register	0EF9 ₁₆	00 ₁₆
(24) Serial I/O2 status register	001E ₁₆	80 ₁₆	(56) Port P2FLD/port switch register	0EFA ₁₆	00 ₁₆
(25) Timer 1	0020 ₁₆	FF ₁₆	(57) Port P8FLD/port switch register	0EFB ₁₆	00 ₁₆
(26) Timer 2	0021 ₁₆	01 ₁₆	(58) Port P8FLD output control register	0EFC ₁₆	00 ₁₆
(27) Timer 3	0022 ₁₆	FF ₁₆	(59) Buzzer output control register	0EFD ₁₆	00 ₁₆
(28) Timer 4	0023 ₁₆	FF ₁₆	(60) Processor status register	(PS)	X X X X 1 X X
(29) Timer 5	0024 ₁₆	FF ₁₆	(61) Program counter	(PCH)	FFFD ₁₆ contents
(30) Timer 6	0025 ₁₆	FF ₁₆		(PCL)	FFFC ₁₆ contents
(31) PWM control register	0026 ₁₆	00 ₁₆			
(32) Timer 12 mode register	0028 ₁₆	00 ₁₆			

X: Not fixed

Since the initial values for other than above mentioned registers and RAM contents are indefinite at reset, they must be set.

Fig. 70 Internal status at reset

CLOCK GENERATING CIRCUIT

The 38B4 group has two built-in oscillation circuits. An oscillation circuit can be formed by connecting a resonator between X_{IN} and X_{OUT} (X_{CIN} and X_{COUT}). Use the circuit constants in accordance with the resonator manufacturer's recommended values. No external resistor is needed between X_{IN} and X_{OUT} since a feedback resistor exists on-chip. However, an external feedback resistor is needed between X_{CIN} and X_{COUT} .

Immediately after power on, only the X_{IN} oscillation circuit starts oscillating, and X_{CIN} and X_{COUT} pins function as I/O ports.

Frequency Control

(1) Middle-speed mode

The internal system clock is the frequency of X_{IN} divided by 4. After reset, this mode is selected.

(2) High-speed mode

The internal system clock is the frequency of X_{IN} .

(3) Low-speed mode

The internal system clock is the frequency of X_{CIN} divided by 2.

■Note

If you switch the mode between middle/high-speed and low-speed, stabilize both X_{IN} and X_{CIN} oscillations. The sufficient time is required for the sub clock to stabilize, especially immediately after power on and at returning from stop mode. When switching the mode between middle/high-speed and low-speed, set the frequency on condition that $f(X_{IN}) > 3f(X_{CIN})$.

(4) Low power consumption mode

The low power consumption operation can be realized by stopping the main clock X_{IN} in low-speed mode. To stop the main clock, set bit 5 of the CPU mode register to "1". When the main clock X_{IN} is restarted (by setting the main clock stop bit to "0"), set enough time for oscillation to stabilize.

By clearing furthermore the X_{COUT} drivability selection bit (b3) of CPU mode register to "0", low power consumption operation of less than 200 μA ($f(X_{CIN}) = 32 \text{ kHz}$) can be realized by reducing the drivability between X_{CIN} and X_{COUT} . At reset or during STP instruction execution this bit is set to "1" and a strong drivability that has an easy oscillation start is set.

Oscillation Control

(1) Stop mode

If the STP instruction is executed, the internal system clock stops at an "H" level, and X_{IN} and X_{CIN} oscillators stop. Timer 1 is set to "FF₁₆" and timer 2 is set to "01₁₆".

Either X_{IN} divided by 8 or X_{CIN} divided by 16 is input to timer 1 as count source, and the output of timer 1 is connected to timer 2. The bits of the timer 12 mode register are cleared to "0". Set the interrupt enable bits of the timer 1 and timer 2 to disabled ("0") before executing the STP instruction. Oscillator restarts when an external interrupt is received or reset, but the internal system clock is not supplied to the CPU until timer 1 underflows. This allows time for the clock circuit oscillation to stabilize.

(2) Wait mode

If the WIT instruction is executed, the internal system clock stops at an "H" level. The states of X_{IN} and X_{CIN} are the same as the state before executing the WIT instruction. The internal system clock restarts at reset or when an interrupt is received. Since the oscillator does not stop, normal operation can be started immediately after the clock is restarted.

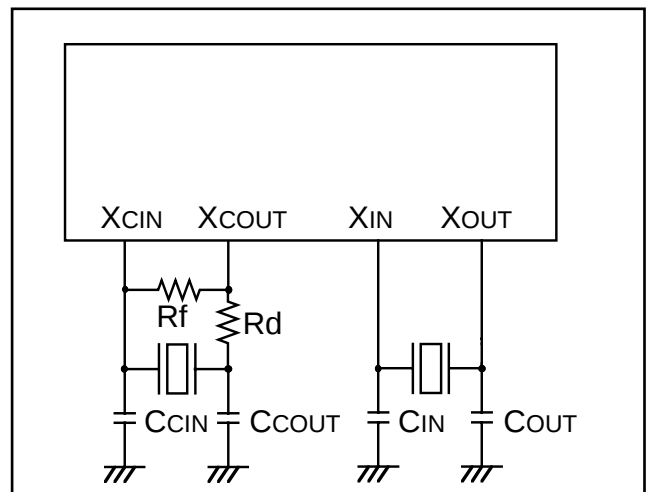


Fig. 71 Ceramic resonator circuit

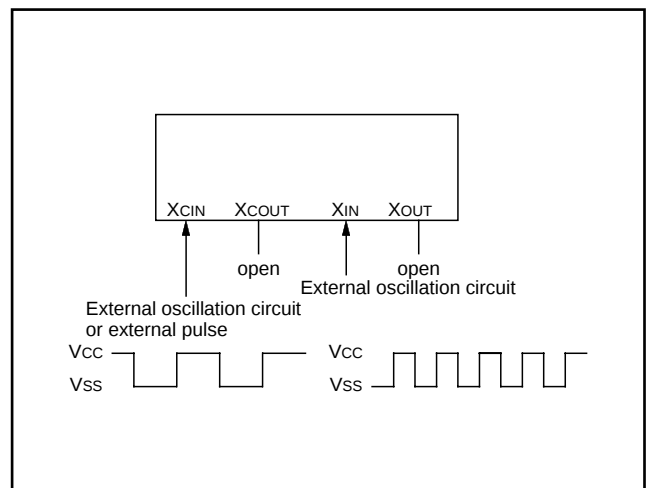


Fig. 72 External clock input circuit

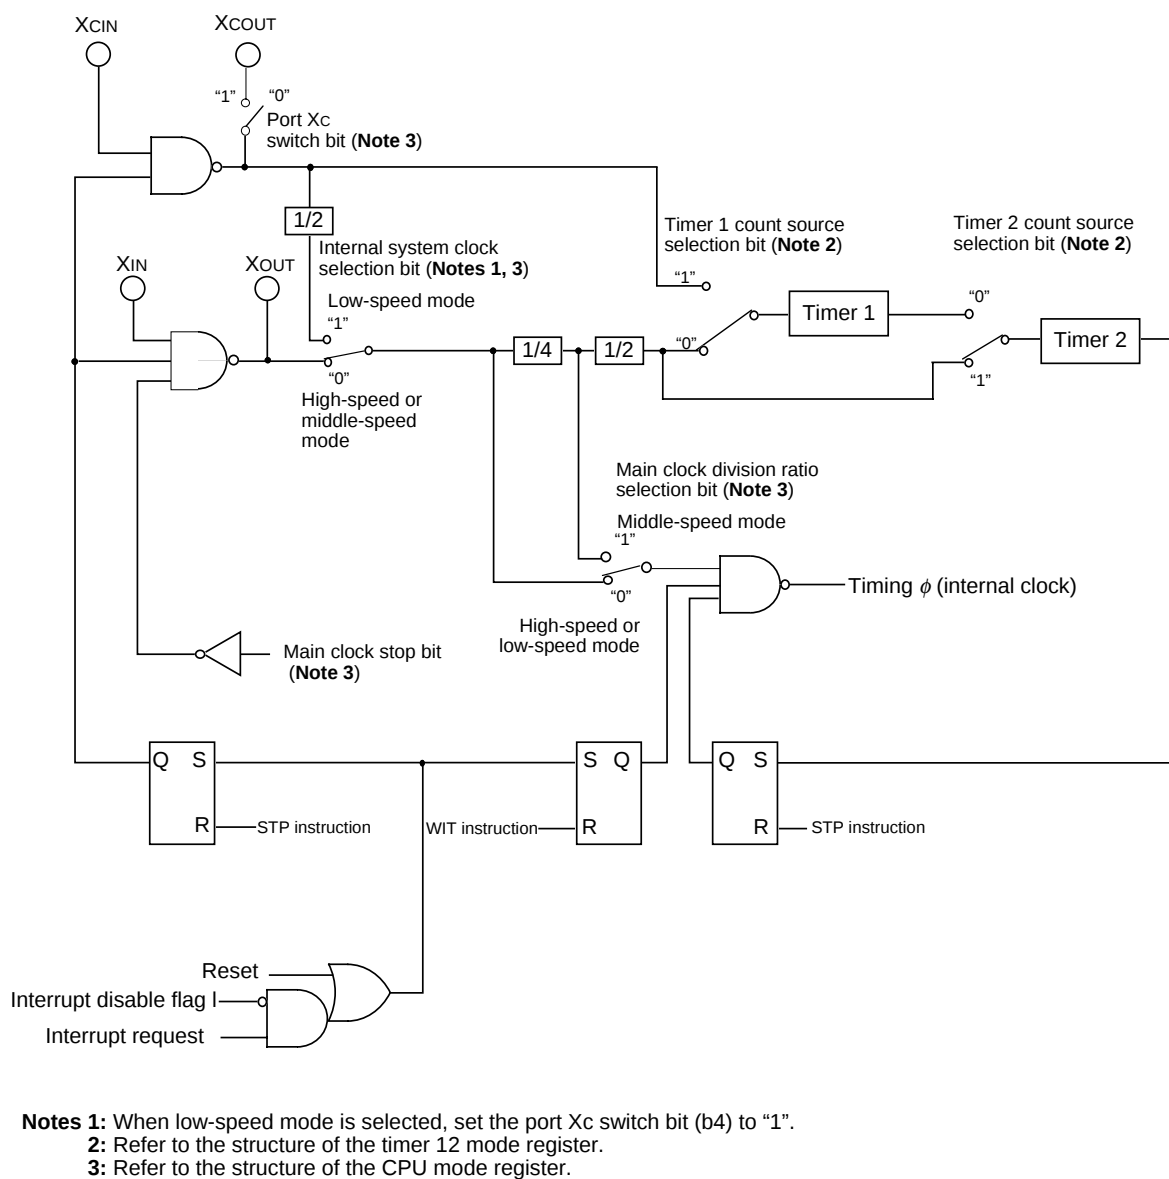


Fig. 73 Clock generating circuit block diagram

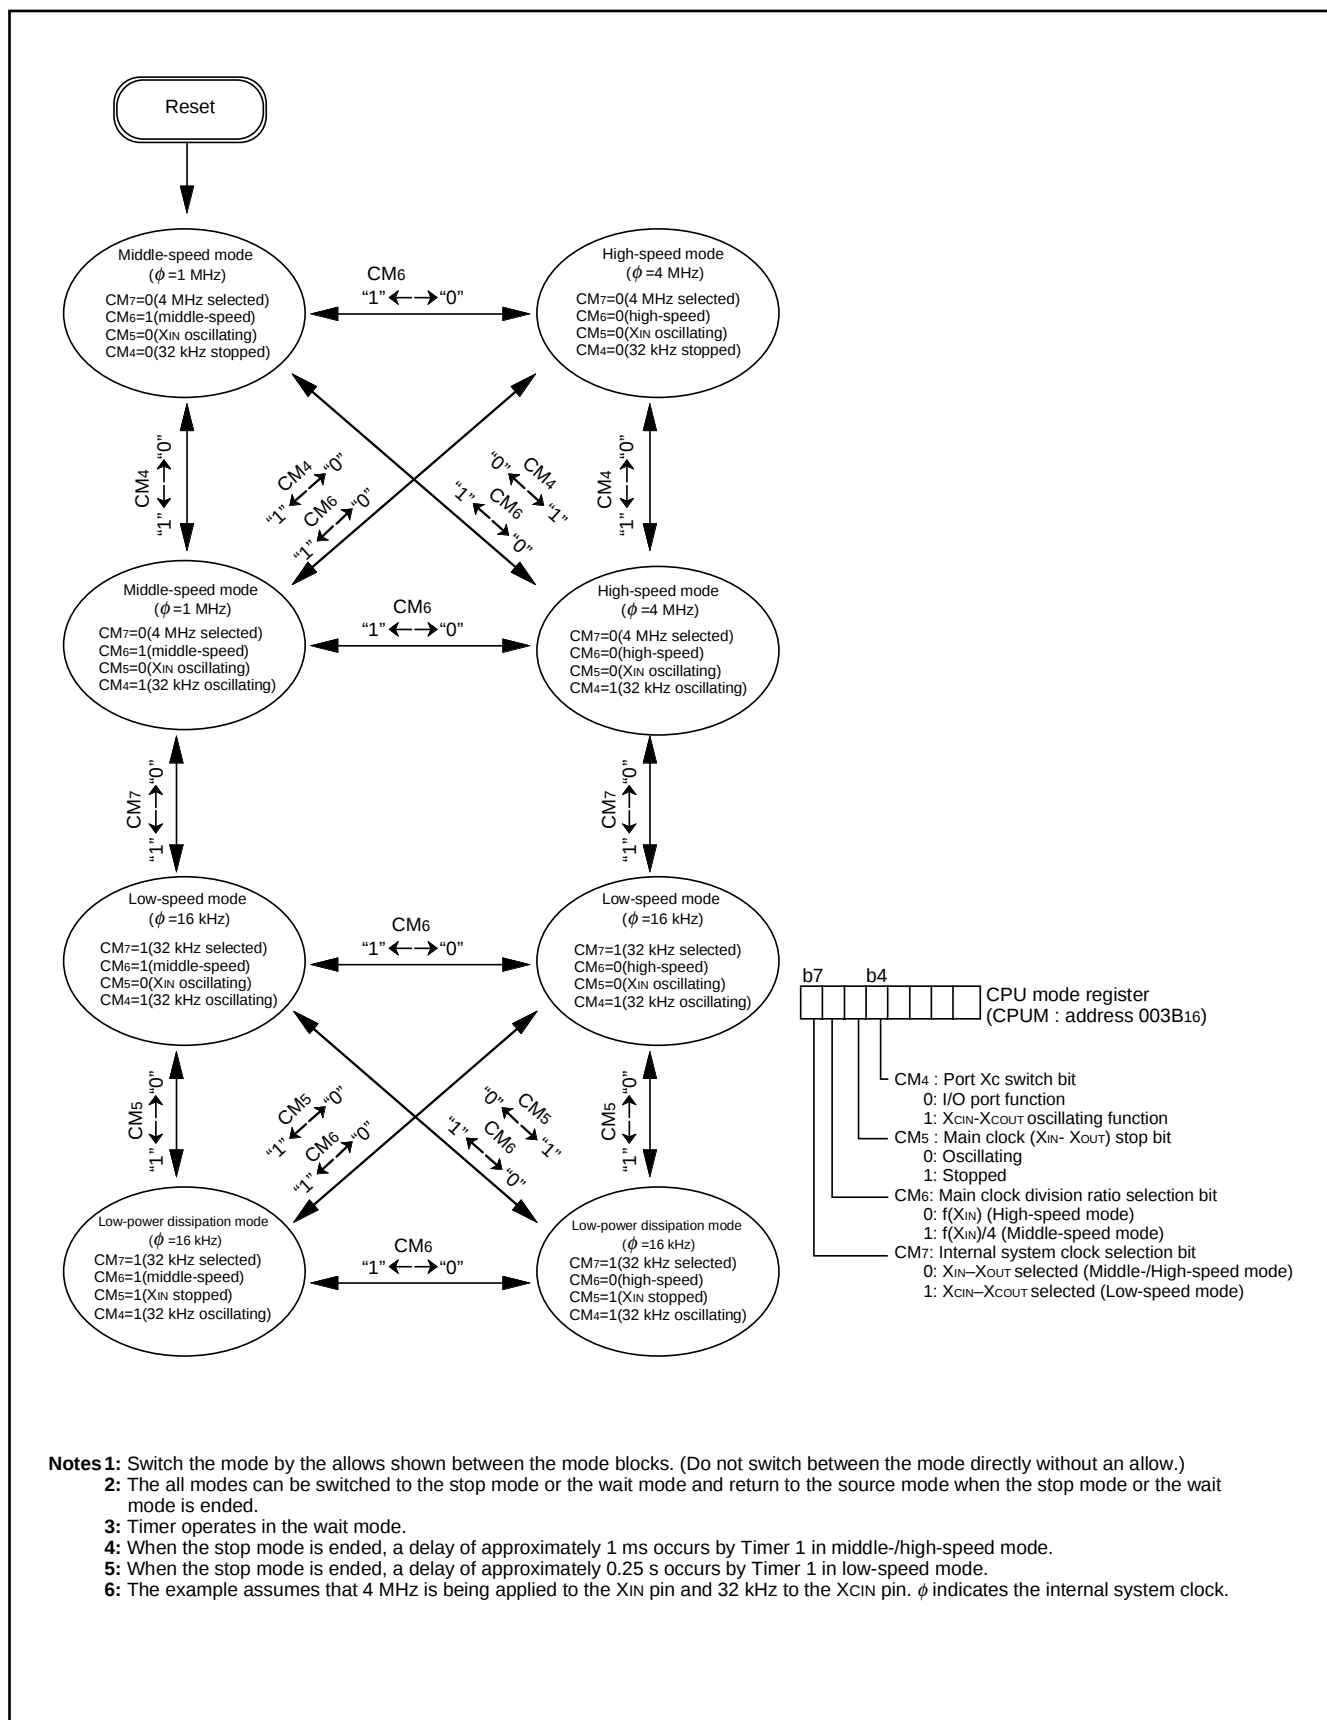


Fig. 74 State transitions of system clock

NOTES ON PROGRAMMING

Processor Status Register

The contents of the processor status register (PS) after a reset are undefined, except for the interrupt disable flag (I) which is "1". After a reset, initialize flags which affect program execution. In particular, it is essential to initialize the index X mode (T) and the decimal mode (D) flags because of their effect on calculations.

Interrupts

The contents of the interrupt request bits do not change immediately after they have been written. After writing to an interrupt request register, execute at least one instruction before performing a BBC or BBS instruction.

Decimal Calculations

- To calculate in decimal notation, set the decimal mode flag (D) to "1", then execute an ADC or SBC instruction. Only the ADC and SBC instructions yield proper decimal results. After executing an ADC or SBC instruction, execute at least one instruction before executing a SEC, CLC, or CLD instruction.
- In decimal mode, the values of the negative (N), overflow (V), and zero (Z) flags are invalid.

Timers

If a value n (between 0 and 255) is written to a timer latch, the frequency division ratio is $1/(n+1)$.

Multiplication and Division Instructions

- The index X mode (T) and the decimal mode (D) flags do not affect the MUL and DIV instruction.
- The execution of these instructions does not change the contents of the processor status register.

Ports

The contents of the port direction registers cannot be read. The following cannot be used:

- The data transfer instruction (LDA, etc.)
- The operation instruction when the index X mode flag (T) is "1"
- The addressing mode which uses the value of a direction register as an index
- The bit-test instruction (BBC or BBS, etc.) to a direction register
- The read-modify-write instructions (ROR, CLB, or SEB, etc.) to a direction register.

Use instructions such as LDM and STA, etc., to set the port direction registers.

Serial I/O

- Using an external clock

When using an external clock, input "H" to the external clock input pin and clear the serial I/O interrupt request bit before executing serial I/O transfer and serial I/O automatic transfer.

- Using an internal clock

When using an internal clock, set the synchronous clock to the internal clock, then clear the serial I/O interrupt request bit before executing a serial I/O transfer and serial I/O automatic transfer.

Automatic Transfer Serial I/O

When using the automatic transfer serial I/O mode of the serial I/O1, set an automatic transfer interval as the following.

Otherwise the serial data might be incorrectly transmitted/received.

- Set an automatic transfer interval for each 1-byte data transfer as the following:

- (1) Not using FLD controller

Keep the interval for **5 cycles or more of internal system clock** from clock rising of the last bit of 1-byte data.

- (2) Using FLD controller

- (a) Not using gradation display

Keep the interval for **12 cycles or more of internal system clock** from clock rising of the last bit of 1-byte data.

- (b) Using gradation display

Keep the interval for **18 cycles or more of internal system clock** from clock rising of the last bit of 1-byte data.

A-D Converter

The comparator uses internal capacitors whose charge will be lost if the clock frequency is too low.

Therefore, make sure that $f(X_{IN})$ is at least on 250 kHz during an A-D conversion.

Do not execute the STP or WIT instruction during an A-D conversion.

Instruction Execution Time

The instruction execution time is obtained by multiplying the frequency of the internal system clock by the number of cycles needed to execute an instruction.

The number of cycles required to execute an instruction is shown in the list of machine instructions.

The frequency of the internal system clock is the same of the X_{IN} frequency in high-speed mode.

At STP Instruction Release

At the STP instruction release, all bits of the timer 12 mode register are cleared.

The Xcout drivability selection bit (the CPU mode register) is set to "1" (high drive) in order to start oscillating.

DATA REQUIRED FOR MASK ORDERS

The following are necessary when ordering a mask ROM production:

- (1) Mask ROM Order Confirmation Form
- (2) Mask Specification Form
- (3) Data to be written to ROM, in EPROM form (three identical copies)

MASK OPTION OF PULL-DOWN RESISTOR (object product: M38B4XXH-XXXXFP)

Whether built-in pull-down resistors are connected or not to high-breakdown voltage ports P20 to P27 and P80 to P83 can be specified in ordering mask ROM. The option type can be specified from among 8 types; A to G, P as shown Table 11.

Table 11 Mask option type of pull-down resistor

Option type	Connective port of pull-down resistor (connected at "1" writing)												Restriction
	P20	P21	P22	P23	P24	P25	P26	P27	P80	P81	P82	P83	
A (\$41)													
B (\$42)								1	1				
C (\$43)				1	1	1	1	1					
D (\$44)			1	1	1	1	1	1					
E (\$45)	1	1	1	1	1	1	1	1					
F (\$46)	1	1	1	1	1	1	1	1	1	1			
G (\$47)	1	1	1	1	1	1	1	1	1	1	1	1	
P (\$50)	1	1	1	1	1	1	1	1	1	1	1	1	(Note 4)

- Notes 1:** The electrical characteristics of high-breakdown voltage ports P20 to P27 and P80 to P83's built-in pull-down resistors are the same as that of high-breakdown voltage ports P00 to P07.
- 2:** The absolute maximum ratings of power dissipation may be exceeded owing to the number of built-in pull-down resistor. After calculating the power dissipation, specify the option type.
- 3:** One time PROM version and EPROM version cannot be specified whether built-in pull-down resistors are connected or not likewise option type A.
- 4:** INT3 function and CNTR1 function cannot be used in the option type P.

Power Dissipation Calculating Method

●Fixed number depending on microcomputer's standard

- V_{OH} output fall voltage of high-breakdown port
2 V (max.); | Current value | = at 18 mA
- Resistor value 43 V / 900 μA = 48 kΩ (min.)
- Power dissipation of internal circuit (CPU, ROM, RAM etc.) = 5 V × 15 mA = 75 mW

●Fixed number depending on use condition

- Apply voltage to V_{EE} pin: V_{CC} – 45 V
- Timing number a; digit number b; segment number c
- Ratio of T_{off} time corresponding T_{disp} time: 1/16
- Turn ON segment number during repeat cycle: d
- All segment number during repeat cycle: e (= a × c)
- Total number of built-in resistor: for digit; f, for segment; g
- Digit pin current value h (mA)
- Segment pin current value i (mA)

(1) Digit pin power dissipation

$$\{h \times b \times (1 - T_{\text{off}}/T_{\text{disp}}) \times \text{voltage}\} / a$$

(2) Segment pin power dissipation

$$\{i \times d \times (1 - T_{\text{off}}/T_{\text{disp}}) \times \text{voltage}\} / a$$

(3) Pull-down resistor power dissipation (digit)

$$\{\text{power dissipation per 1 digit} \times (b \times f / b) \times (1 - T_{\text{off}}/T_{\text{disp}})\} / a$$

(4) Pull-down resistor power dissipation (segment)

$$\{\text{power dissipation per 1 segment} \times (d \times g / c) \times (1 - T_{\text{off}}/T_{\text{disp}})\} / a$$

(5) Internal circuit power dissipation (CPU, ROM, RAM etc.) = 75 mW

$$(1) + (2) + (3) + (4) + (5) = \underline{\quad} \text{ mW}$$

Power Dissipation Calculating Example 1

●Fixed number depending on microcomputer's standard

- V_{OH} output fall voltage of high-breakdown port
2 V (max.); | Current value | = at 18 mA
- Resistor value 43 V / 900 μA = 48 kΩ (min.)
- Power dissipation of internal circuit (CPU, ROM, RAM etc.) = 5 V × 15 mA = 75 mW

●Fixed number depending on use condition

- Apply voltage to V_{EE} pin: V_{CC} – 45 V
- Timing number 17; digit number 16; segment number 20
- Ratio of T_{off} time corresponding T_{disp} time: 1/16
- Turn ON segment number during repeat cycle: 31
- All segment number during repeat cycle: 340 (= 17 × 20)
- Total number of built-in resistor: for digit; 16, for segment; 20
- Digit pin current value: 18 (mA)
- Segment pin current value: 3 (mA)

(1) Digit pin power dissipation

$$\{18 \times 16 \times (1 - 1/16) \times 2\} / 17 = 31.77 \text{ mW}$$

(2) Segment pin power dissipation

$$\{3 \times 31 \times (1 - 1/16) \times 2\} / 17 = 10.26 \text{ mW}$$

(3) Pull-down resistor power dissipation (digit)

$$(45 - 2)^2 / 48 \times (16 \times 16/16) \times (1 - 1/16) / 17 = 33.99 \text{ mW}$$

(4) Pull-down resistor power dissipation (segment)

$$(45 - 2)^2 / 48 \times (31 \times 20/20) \times (1 - 1/16) / 17 = 65.86 \text{ mW}$$

(5) Internal circuit power dissipation (CPU, ROM, RAM etc.) = 75 mW

$$(1) + (2) + (3) + (4) + (5) = \underline{217 \text{ mW}}$$

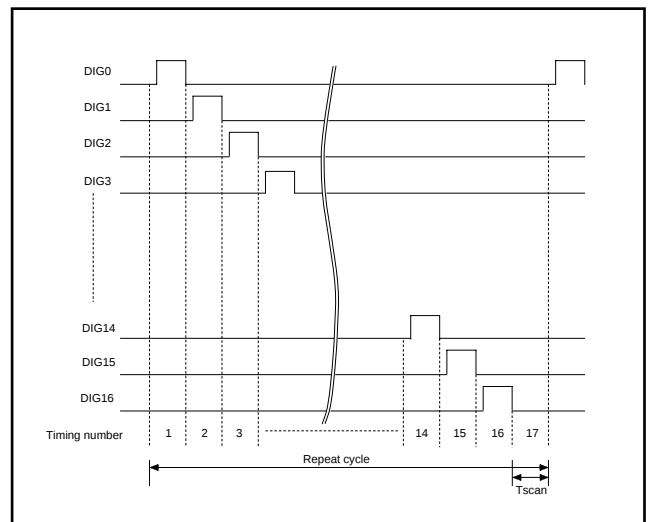


Fig. 75 Digit timing waveform (1)

Power Dissipation Calculating Example 2 (when 2 or more digit is turned ON at same time)

●Fixed number depending on microcomputer's standard

- V_{OH} output fall voltage of high-breakdown port
2 V (max.); | Current value | = at 18 mA
- Resistor value $43 \text{ V} / 900 \mu\text{A} = 48 \text{ k}\Omega$ (min.)
- Power dissipation of internal circuit (CPU, ROM, RAM etc.) = $5 \text{ V} \times 15 \text{ mA} = 75 \text{ mW}$

●Fixed number depending on use condition

- Apply voltage to V_{EE} pin: $V_{CC} - 45 \text{ V}$
- Timing number 11; digit number 12; segment number 24
- Ratio of Toff time corresponding Tdisp time: 1/16
- Turn ON segment number during repeat cycle: 114
- All segment number during repeat cycle: $264 (= 11 \times 24)$
- Total number of built-in resistor: for digit; 10, for segment; 22
- Digit pin current value: 18 (mA)
- Segment pin current value: 3 (mA)

(1) Digit pin power dissipation

$$\{18 \times 12 \times (1 - 1/16) \times 2\} / 11 = 36.82 \text{ mW}$$

(2) Segment pin power dissipation

$$\{3 \times 114 \times (1 - 1/16) \times 2\} / 11 = 58.30 \text{ mW}$$

(3) Pull-down resistor power dissipation (digit)

$$(45 - 2)^2 / 48 \times (12 \times 10/12) \times (1 - 1/16) / 11 = 32.84 \text{ mW}$$

(4) Pull-down resistor power dissipation (segment)

$$(45 - 2)^2 / 48 \times (114 \times 22/24) \times (1 - 1/16) / 11 = 343.08 \text{ mW}$$

(5) Internal circuit power dissipation (CPU, ROM, RAM etc.) = 75 mW

$$(1) + (2) + (3) + (4) + (5) = 547 \text{ mW}$$

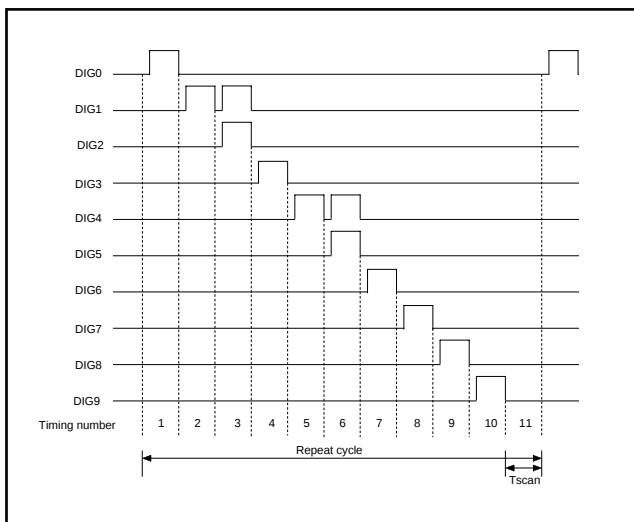


Fig. 76 Digit timing waveform (2)

ABSOLUTE MAXIMUM RATINGS

Table 12 Absolute maximum ratings

Symbol	Parameter	Conditions	Ratings	Unit
V _{CC}	Power source voltage	All voltages are based on V _{SS} . Output transistors are cut off.	−0.3 to 6.5	V
V _{EE}	Pull-down power source voltage		V _{CC} − 45 to V _{CC} +0.3 (Note 1)	V
			V _{CC} − 42 to V _{CC} +0.3 (Note 2)	V
V _I	Input voltage P47, P50–P57, P61–P65, P70–P77, P84–P87, P90, P91		−0.3 to V _{CC} +0.3	V
V _I	Input voltage P40–P46, P60		−0.3 to 13	V
V _I	Input voltage P00–P07, P20–P27, P80–P83		V _{CC} − 45 to V _{CC} +0.3 (Note 1)	V
			V _{CC} − 42 to V _{CC} +0.3 (Note 2)	V
V _I	Input voltage $\overline{\text{RESET}}$, X _{IN}		−0.3 to V _{CC} +0.3	V
V _I	Input voltage X _{CIN}		−0.3 to V _{CC} +0.3	V
V _O	Output voltage P00–P07, P10–P17, P20–P27, P30–P37, P80–P83		V _{CC} − 45 to V _{CC} +0.3 (Note 1)	V
			V _{CC} − 42 to V _{CC} +0.3 (Note 2)	V
V _O	Output voltage P50–P57, P61–P65, P70–P77, P84–P87, P90, P91, X _{OUT} , X _{COUT}		−0.3 to V _{CC} +0.3	V
V _O	Output voltage P40–P46, P60		−0.3 to 13	V
P _d	Power dissipation	T _a = −20 to 65 °C	800	mW
		T _a = 65 to 85 °C	800 − 12.5 × (T _a − 65)	mW
T _{opr}	Operating temperature		−20 to 85	°C
T _{stg}	Storage temperature		−40 to 125	°C

Notes 1: When V_{CC} is 4.0 to 5.5 V.

2: When V_{CC} is 2.7 to 4.0 V.

RECOMMENDED OPERATING CONDITIONS

Table 13 Recommended operating conditions (1)

(V_{CC} = 2.7 to 5.5 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter		Limits			Unit
			Min.	Typ.	Max.	
V _{CC}	Power source voltage	In high-speed mode	4.0	5.0	5.5	V
		In middle-/low-speed mode, 2 MHz or less in high-speed mode	2.7	5.0	5.5	V
V _{SS}	Power source voltage			0		V
V _{EE}	Pull-down power source voltage	V _{CC} = 4.0 to 5.5 V	V _{CC} –43		V _{CC}	V
		V _{CC} = 2.7 to 4.0 V	V _{CC} –40		V _{CC}	V
V _{REF}	Analog reference voltage (when A-D converter is used)		2.0		V _{CC}	V
AV _{SS}	Analog power source voltage			0		V
V _{IA}	Analog input voltage	AN0–AN11	0		V _{CC}	V
V _{IH}	“H” input voltage	P40–P47, P50–P57, P60–P65, P70–P77, P90, P91	V _{CC} = 4.0 to 5.5 V	0.75V _{CC}	V _{CC}	V
			V _{CC} = 2.7 to 4.0 V	0.8V _{CC}	V _{CC}	V
V _{IH}	“H” input voltage	P84–P87	V _{CC} = 4.0 to 5.5 V	0.4V _{CC}	V _{CC}	V
			V _{CC} = 2.7 to 4.0 V	0.5V _{CC}	V _{CC}	V
V _{IH}	“H” input voltage	P00–P07		0.8V _{CC}	V _{CC}	V
V _{IH}	“H” input voltage	P20–P27, P80–P83	V _{CC} = 4.0 to 5.5 V	0.52V _{CC}	V _{CC}	V
			V _{CC} = 2.7 to 4.0 V	0.75V _{CC}	V _{CC}	V
V _{IH}	“H” input voltage	RESET		0.8V _{CC}	V _{CC}	V
V _{IH}	“H” input voltage	X _{IN} , X _{CIN}		0.8V _{CC}	V _{CC}	V
V _{IL}	“L” input voltage	P40–P47, P50–P57, P60–P65, P70–P77, P90, P91	V _{CC} = 4.0 to 5.5 V	0	0.25V _{CC}	V
			V _{CC} = 2.7 to 4.0 V	0	0.2V _{CC}	V
V _{IL}	“L” input voltage	P84–P87		0	0.16V _{CC}	V
V _{IL}	“L” input voltage	P00–P07, P20–P27, P80–P83		0	0.2V _{CC}	V
V _{IL}	“L” input voltage	RESET		0	0.2V _{CC}	V
V _{IL}	“L” input voltage	X _{IN} , X _{CIN}		0	0.2V _{CC}	V

Table 14 Recommended operating conditions (2)

(V_{CC} = 2.7 to 5.5 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
ΣIOH(peak)	"H" total peak output current (Note 1) P00–P07, P10–P17, P20–P27, P30–P37, P80–P83			–240	mA
ΣIOH(peak)	"H" total peak output current (Note 1) P50–P57, P61–P65, P70–P77, P90, P91			–60	mA
ΣIOL(peak)	"L" total peak output current (Note 1) P50–P57, P60–P65, P70–P77, P90, P91			100	mA
ΣIOL(peak)	"L" total peak output current (Note 1) P40–P46, P84–P87			60	mA
ΣIOH(avg)	"H" total average output current (Note 1) P00–P07, P10–P17, P20–P27, P30–P37, P80–P87			–120	mA
ΣIOH(avg)	"H" total average output current (Note 1) P50–P57, P61–P65, P70–P77, P90, P91			–30	mA
ΣIOL(avg)	"L" total average output current (Note 1) P50–P57, P60–P65, P70–P77, P90, P91			50	mA
ΣIOL(avg)	"L" total average output current (Note 1) P40–P46, P84–P87			30	mA
IOH(peak)	"H" peak output current (Note 2) P00–P07, P10–P17, P20–P27, P30–P37, P80–P83			–40	mA
IOH(peak)	"H" peak output current (Note 2) P50–P57, P61–P65, P70–P77, P84–P87, P90, P91			–10	mA
IOL(peak)	"L" peak output current (Note 2) P50–P57, P61–P65, P70–P77, P84–P87, P90, P91			10	mA
IOL(peak)	"L" peak output current (Note 2) P40–P46, P60			30	mA
IOH(avg)	"H" average output current (Note 3) P00–P07, P10–P17, P20–P27, P30–P37, P80–P83			–18	mA
IOH(avg)	"H" average output current (Note 3) P50–P57, P60–P65, P70–P77, P84–P87, P90, P91			–5	mA
IOL(avg)	"L" average output current (Note 3) P50–P57, P61–P65, P70–P77, P84–P87, P90, P91			5	mA
IOL(avg)	"L" average output current (Note 3) P40–P46, P60			15	mA
f(CNTR0)	Clock input frequency for timers 2, 4, and X (duty cycle 50 %)	V _{CC} = 4.0 to 5.5 V		250	kHz
f(CNTR1)		V _{CC} = 2.7 to 4.0 V		100	kHz
f(XIN)	Main clock input oscillation frequency (Note 4)	V _{CC} = 4.0 to 5.5 V		4.2	MHz
		V _{CC} = 2.7 to 4.0 V		2	MHz
f(XCIN)	Sub-clock input oscillation frequency (Notes 4, 5)		32.768	50	kHz

Notes 1: The total output current is the sum of all the currents flowing through all the applicable ports. The total average current is an average value measured over 100 ms. The total peak current is the peak value of all the currents.

2: The peak output current is the peak current flowing in each port.

3: The average output current IOL (avg), IOH(avg) in an average value measured over 100 ms.

4: When the oscillation frequency has a duty cycle of 50%.

5: When using the microcomputer in low-speed mode, set the sub-clock input oscillation frequency on condition that f(XCIN) < f(XIN)/3.

ELECTRICAL CHARACTERISTICS

Table 15 Electrical characteristics (1)

(V_{CC} = 2.7 to 5.5 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter		Test conditions	Limits			Unit
				Min.	Typ.	Max.	
V _{OH}	“H” output voltage	P00–P07, P10–P17, P20–P27, P30–P37, P80–P83	V _{CC} = 4.0 to 5.5 V	I _{OH} = –18 mA	V _{CC} –2.0		V
			V _{CC} = 2.7 to 4.0 V	I _{OH} = –10 mA	V _{CC} –1.5		V
V _{OH}	“H” output voltage	P50–P57, P60–P65, P70–P77, P84–P87, P90, P91	V _{CC} = 4.0 to 5.5 V	I _{OH} = –10 mA	V _{CC} –2.0		V
			V _{CC} = 2.7 to 4.0 V	I _{OH} = –10 mA	V _{CC} –1.0		V
V _{OL}	“L” output voltage	P50–P57, P61–P65, P84–P87, P90, P91	V _{CC} = 4.0 to 5.5 V	I _{OL} = 10 mA		2.0	V
			V _{CC} = 2.7 to 4.0 V	I _{OL} = 1.6 mA		0.4	V
V _{OL}	“L” output voltage	P40–P46, P60	V _{CC} = 4.0 to 5.5 V	I _{OL} = 15 mA	0.6	2.0	V
			V _{CC} = 2.7 to 4.0 V	I _{OL} = 5 mA	0.3	1.0	V
V _{T+} –V _{T–}	Hysteresis	P40–P42, P45–P47, P5, P60, P61, P64 (Note 1)			0.4		V
V _{T+} –V _{T–}	Hysteresis	RESET, X _{IN}			0.5		V
V _{T+} –V _{T–}	Hysteresis	X _{CIN}			0.5		μA
I _{IH}	“H” input current	P47, P50–P57, P61–P65, P70–P77, P84–P87	V _I = V _{CC}			5.0	μA
I _{IH}	“H” input current	P40–P46, P60	V _I = 12 V			10.0	μA
I _{IH}	“H” input current	P00–P07, P20–P27, P80–P83 (Note 2)	V _I = V _{CC}			5.0	μA
I _{IH}	“H” input current	RESET, X _{CIN}	V _I = V _{CC}			5.0	μA
I _{IH}	“H” input current	X _{IN}	V _I = V _{CC}		4.0		μA
I _{IL}	“L” input current	P40–P47, P60	V _I = V _{SS}			–5.0	μA
I _{IL}	“L” input current	P50–P57, P61–P65, P70–P77, P84–P87, P90, P91	V _I = V _{SS}			–5.0	μA
			Pull-up “off”				
			V _{CC} = 5 V, V _I = V _{SS}		–70		μA
			Pull-up “on”				
I _{IL}	“L” input current	P00–P07, P20–P27, P80–P83 (Note 2)	V _{CC} = 3 V, V _I = V _{SS}		–25		μA
			Pull-up “on”				
I _{IL}	“L” input current	P00–P07, P20–P27, P80–P83 (Note 2)	V _I = V _{SS}			–5.0	μA
I _{IL}	“L” input current	RESET, X _{CIN}	V _I = V _{SS}			–5.0	μA
I _{IL}	“L” input current	X _{IN}	V _I = V _{SS}		–4.0		μA
R _{PULLD}	Pull-down resistor	P00–P07, P10–P17, P30–P37 (P20–P27, P80–P83 at option)	V _{EE} = V _{CC} –43 V, V _{OL} = V _{CC} Output transistors “off”	143	72	47	kΩ
I _{LEAK}	Output leak current	P00–P07, P10–P17, P20–P27, P30–P37, P80–P83	V _{EE} = V _{CC} –43 V, V _{OL} = V _{CC} –43 V Output transistors “off”			–10	μA
I _{READH}	“H” read current	P00–P07, P20–P27, P80–P83	V _I = 5 V		1		μA
V _{RAM}	RAM hold voltage		When clock is stopped	2		V _{CC}	V

Notes 1: P42, P45, P46, and P60 of the mask option type P do not have hysteresis characteristics.

2: Except when reading ports P0, P2, or P8.

Table 16 Electrical characteristics (2)

(V_{CC} = 2.7 to 5.5 V, T_a = -20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I _{CC}	Power source current	High-speed mode f(X _{IN}) = 4.2 MHz f(X _{CIN}) = 32 kHz Output transistors "off"		7.5		mA
		High-speed mode f(X _{IN}) = 4.2 MHz (in WIT state) f(X _{CIN}) = 32 kHz Output transistors "off"		1		mA
		Middle-speed mode f(X _{IN}) = 4.2 MHz f(X _{CIN}) = stopped Output transistors "off"		3		mA
		Middle-speed mode f(X _{IN}) = 4.2 MHz (in WIT state) f(X _{CIN}) = stopped Output transistors "off"		1		mA
		Low-speed mode f(X _{IN}) = stopped f(X _{CIN}) = 32 kHz Low-power dissipation mode (CM3 = 0) Output transistors "off"		60		μA
		Low-speed mode f(X _{IN}) = stopped f(X _{CIN}) = 32 kHz (in WIT state) Low-power dissipation mode (CM3 = 0) Output transistors "off"		20		μA
		Increment when A-D conversion is executed		0.6		mA
		All oscillation stopped (in STP state)	T _a = 25 °C	0.1	1	μA
		Output transistors "off"				10 μA

A-D converter characteristics

Table 17 A-D converter characteristics (1)

(V_{CC} = 4.0 to 5.5 V, V_{SS} = 0 V, T_a = -20 to 85 °C, f(X_{IN}) = 250 kHz to 4.2 MHz in high-speed mode, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
—	Resolution				10	Bits
—	Absolute accuracy (excluding quantization error)	V _{CC} = V _{REF} = 5.12 V		±1	±2.5	LSB
T _{CONV}	Conversion time		61		62	tc(φ)
I _{VREF}	Reference input current	V _{REF} = 5.0 V	50	150	200	μA
I _{IA}	Analog port input current			0.5	5.0	μA
R _{LADDER}	Ladder resistor			35		kΩ

Table 18 A-D converter characteristics (2)

(V_{CC} = 2.7 to 4.0 V, V_{SS} = 0 V, T_a = -20 to 85 °C, f(X_{IN}) = 250 kHz to 2 MHz in high-speed mode, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
—	Resolution				10	Bits
—	Absolute accuracy (excluding quantization error)	V _{CC} = V _{REF} = 3.3 V		±3	±6	LSB
T _{CONV}	Conversion time		61		62	tc(φ)
I _{VREF}	Reference input current	V _{REF} = 3.3 V	30	95	120	μA
I _{IA}	Analog port input current			0.5	5.0	μA
R _{LADDER}	Ladder resistor			35		kΩ

TIMING REQUIREMENTS

Table 19 Timing requirements (1)

(V_{CC} = 4.0 to 5.5 V, V_{SS} = 0 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
t _w (RESET)	Reset input “L” pulse width	2.0			μs
t _c (X _{IN})	Main clock input cycle time (X _{IN} input)	238			ns
t _{WH} (X _{IN})	Main clock input “H” pulse width	60			ns
t _{WL} (X _{IN})	Main clock input “L” pulse width	60			ns
t _c (X _{CIN})	Sub-clock input cycle time (X _{CIN} input)	20			μs
t _{WH} (X _{CIN})	Sub-clock input “H” pulse width	5.0			μs
t _{WL} (X _{CIN})	Sub-clock input “L” pulse width	5.0			μs
t _c (CNTR)	CNTR ₀ , CNTR ₁ input cycle time	4.0			μs
t _{WH} (CNTR)	CNTR ₀ , CNTR ₁ input “H” pulse width	1.6			μs
t _{WL} (CNTR)	CNTR ₀ , CNTR ₁ input “L” pulse width	1.6			μs
t _{WH} (INT)	INT ₀ to INT ₄ input “H” pulse width	80			ns
t _{WL} (INT)	INT ₀ to INT ₄ input “L” pulse width	80			ns
t _c (SCLK)	Serial I/O clock input cycle time	0.95			μs
t _{WH} (SCLK)	Serial I/O clock input “H” pulse width	400			ns
t _{WL} (SCLK)	Serial I/O clock input “L” pulse width	400			ns
t _{su} (SCLK–SIN)	Serial I/O input set up time	200			ns
t _h (SCLK–SIN)	Serial I/O input hold time	200			ns

Table 20 Timing requirements (2)

(V_{CC} = 2.7 to 5.5 V, V_{SS} = 0 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
t _w (RESET)	Reset input “L” pulse width	2.0			μs
t _c (X _{IN})	Main clock input cycle time (X _{IN} input)	500			ns
t _{WH} (X _{IN})	Main clock input “H” pulse width	120			ns
t _{WL} (X _{IN})	Main clock input “L” pulse width	120			ns
t _c (X _{CIN})	Sub-clock input cycle time (X _{CIN} input)	20			μs
t _{WH} (X _{CIN})	Sub-clock input “H” pulse width	5.0			μs
t _{WL} (X _{CIN})	Sub-clock input “L” pulse width	5.0			μs
t _c (CNTR)	CNTR ₀ , CNTR ₁ input cycle time	10			μs
t _{WH} (CNTR)	CNTR ₀ , CNTR ₁ input “H” pulse width	4.0			μs
t _{WL} (CNTR)	CNTR ₀ , CNTR ₁ input “L” pulse width	4.0			μs
t _{WH} (INT)	INT ₀ to INT ₄ input “H” pulse width	230			ns
t _{WL} (INT)	INT ₀ to INT ₄ input “L” pulse width	230			ns
t _c (SCLK)	Serial I/O clock input cycle time	2.0			μs
t _{WH} (SCLK)	Serial I/O clock input “H” pulse width	950			ns
t _{WL} (SCLK)	Serial I/O clock input “L” pulse width	950			ns
t _{su} (SCLK–SIN)	Serial I/O input set up time	400			ns
t _h (SCLK–SIN)	Serial I/O input hold time	300			ns

SWITCHING CHARACTERISTICS

Table 21 Switching characteristics (1)

(V_{CC} = 4.0 to 5.5 V, V_{SS} = 0 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
t _{WH} (SCLK)	Serial I/O clock output “H” pulse width	C _L = 100 pF	t _c (SCLK)/2–160			ns
t _{WL} (SCLK)	Serial I/O clock output “L” pulse width	C _L = 100 pF	t _c (SCLK)/2–160			ns
t _d (SCLK–SOUT)	Serial I/O output delay time				0.2 t _c	ns
t _v (SCLK–SOUT)	Serial I/O output valid time		0			ns
t _r (SCLK)	Serial I/O clock output rising time	C _L = 100 pF			40	ns
t _f (SCLK)	Serial I/O clock output falling time	C _L = 100 pF			40	ns
t _r (Pch–strg)	P-channel high-breakdown voltage output rising time (Note 1)	C _L = 100 pF V _{EE} = V _{CC} –43 V		55		ns
t _r (Pch–weak)	P-channel high-breakdown voltage output rising time (Note 2)	C _L = 100 pF V _{EE} = V _{CC} –43 V		1.8		μs

Notes 1: When bit 7 of the FLDC mode register (address 0EF416) is at “0”.

2: When bit 7 of the FLDC mode register (address 0EF416) is at “1”.

Table 22 Switching characteristics (2)

(V_{CC} = 2.7 to 4.0 V, V_{SS} = 0 V, T_a = –20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
t _{WH} (SCLK)	Serial I/O clock output “H” pulse width	C _L = 100 pF	t _c (SCLK)/2–240			ns
t _{WL} (SCLK)	Serial I/O clock output “L” pulse width	C _L = 100 pF	t _c (SCLK)/2–240			ns
t _d (SCLK–SOUT)	Serial I/O output delay time				0.4 t _c	ns
t _v (SCLK–SOUT)	Serial I/O output valid time		0			ns
t _r (SCLK)	Serial I/O clock output rising time	C _L = 100 pF			60	ns
t _f (SCLK)	Serial I/O clock output falling time	C _L = 100 pF			60	ns
t _r (Pch–strg)	P-channel high-breakdown voltage output rising time (Note 1)	C _L = 100 pF V _{EE} = V _{CC} –40 V		140		ns
t _r (Pch–weak)	P-channel high-breakdown voltage output rising time (Note 2)	C _L = 100 pF V _{EE} = V _{CC} –40 V		3.6		μs

Notes 1: When bit 7 of the FLDC mode register (address 0EF416) is at “0”.

2: When bit 7 of the FLDC mode register (address 0EF416) is at “1”.

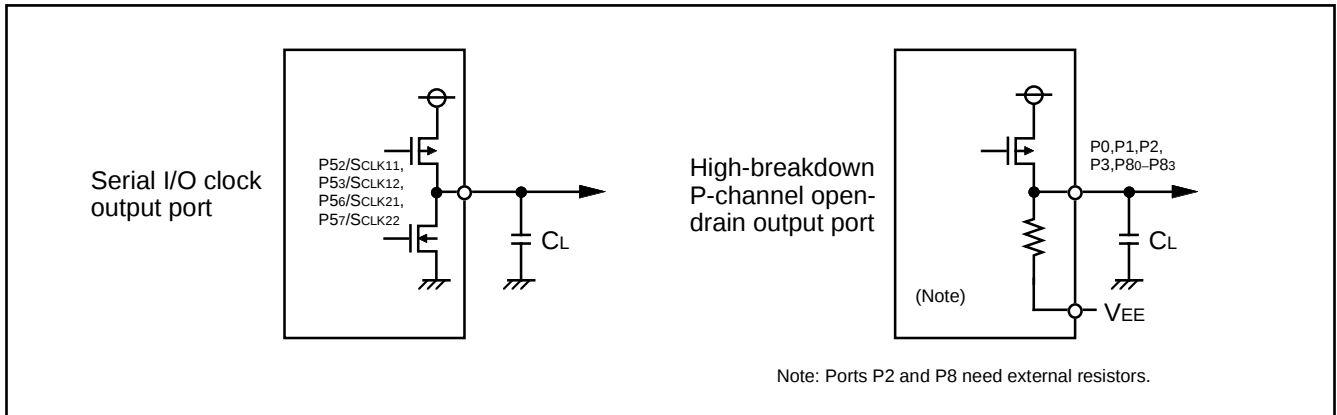


Fig. 77 Circuit for measuring output switching characteristics

Timing Diagram

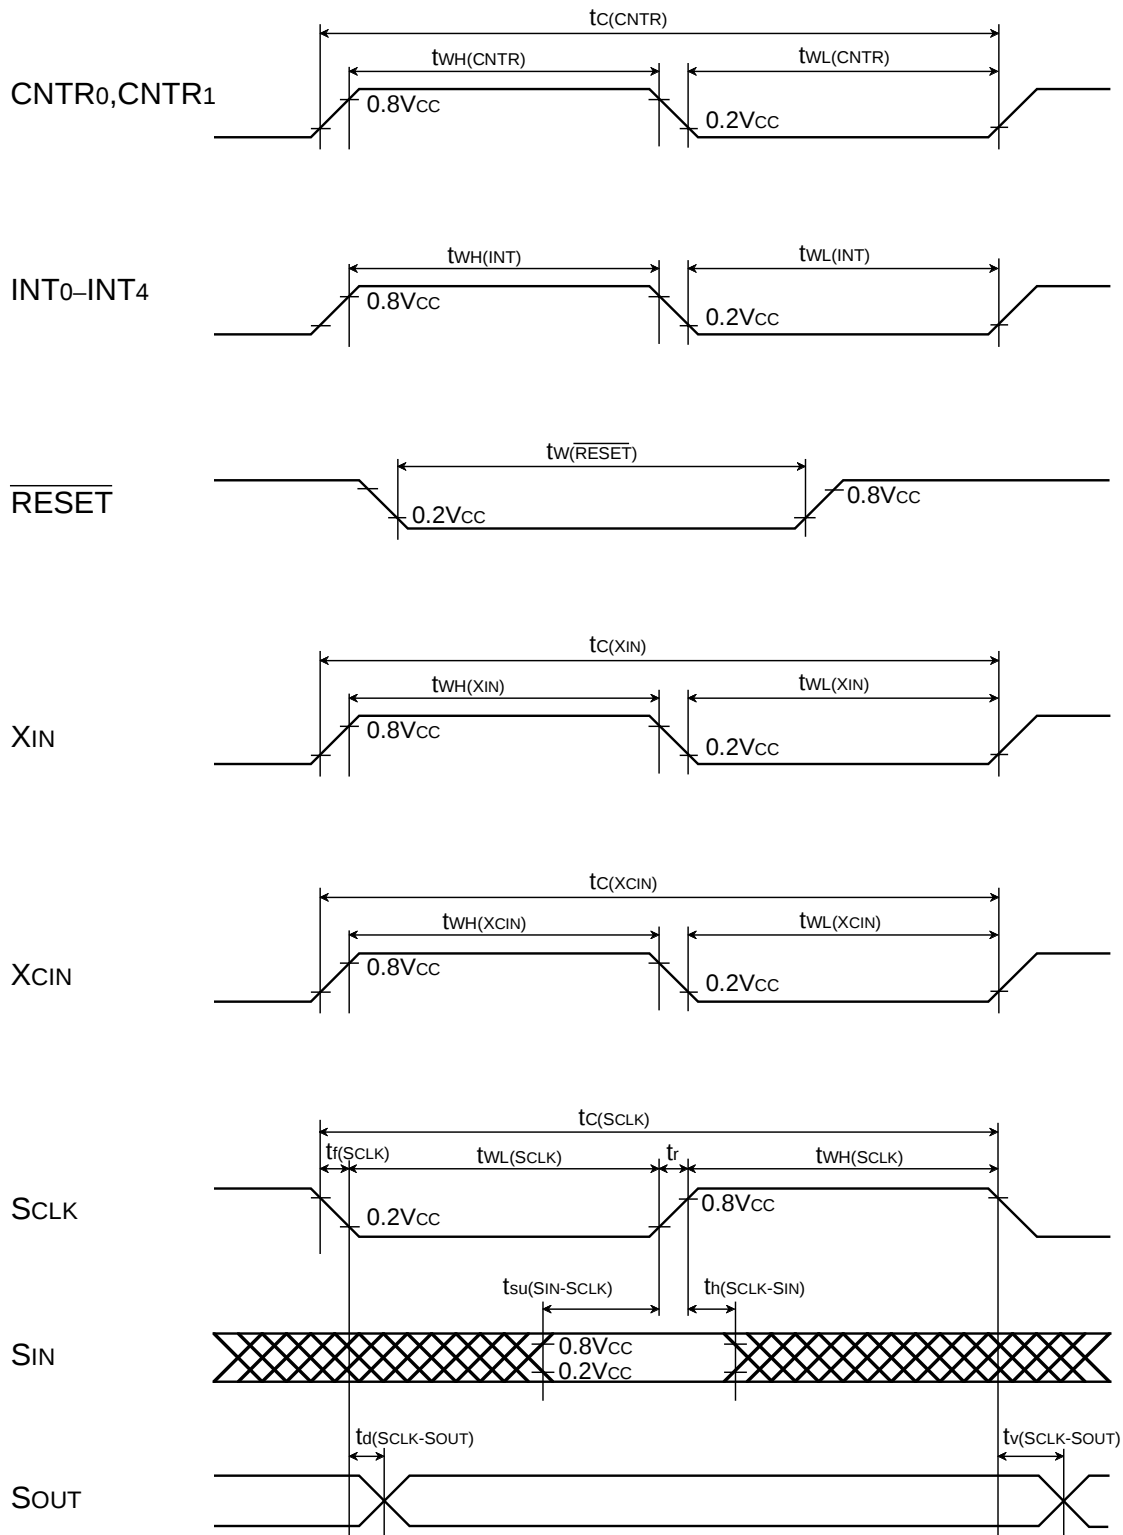



Fig. 78 Timing diagram

PACKAGE OUTLINE

80P6N-A

Plastic 80pin 14X20mm body QFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
QFP80-P-1420-0.80	—	1.58	Alloy 42

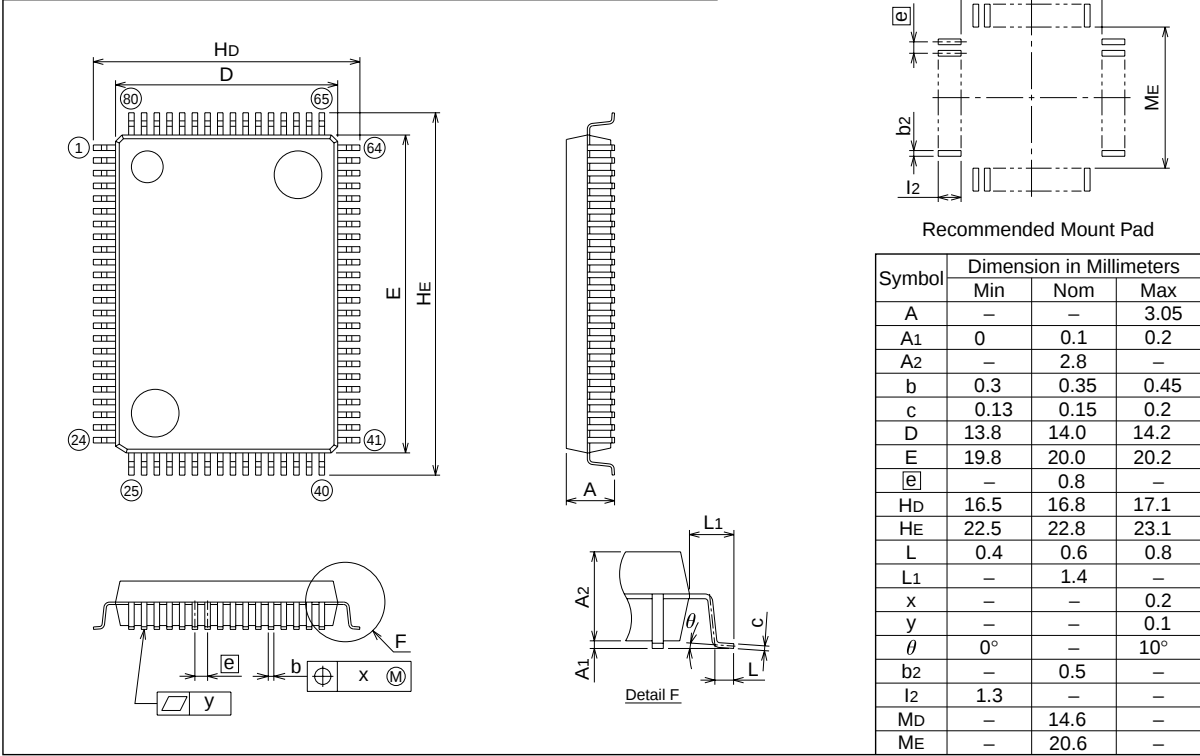

Renesas Technology Corp.

Nippon Bldg.,6-2,Otemachi 2-chome,Chiyoda-ku,Tokyo,100-0004 Japan

Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.mitsubishichips.com>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

