
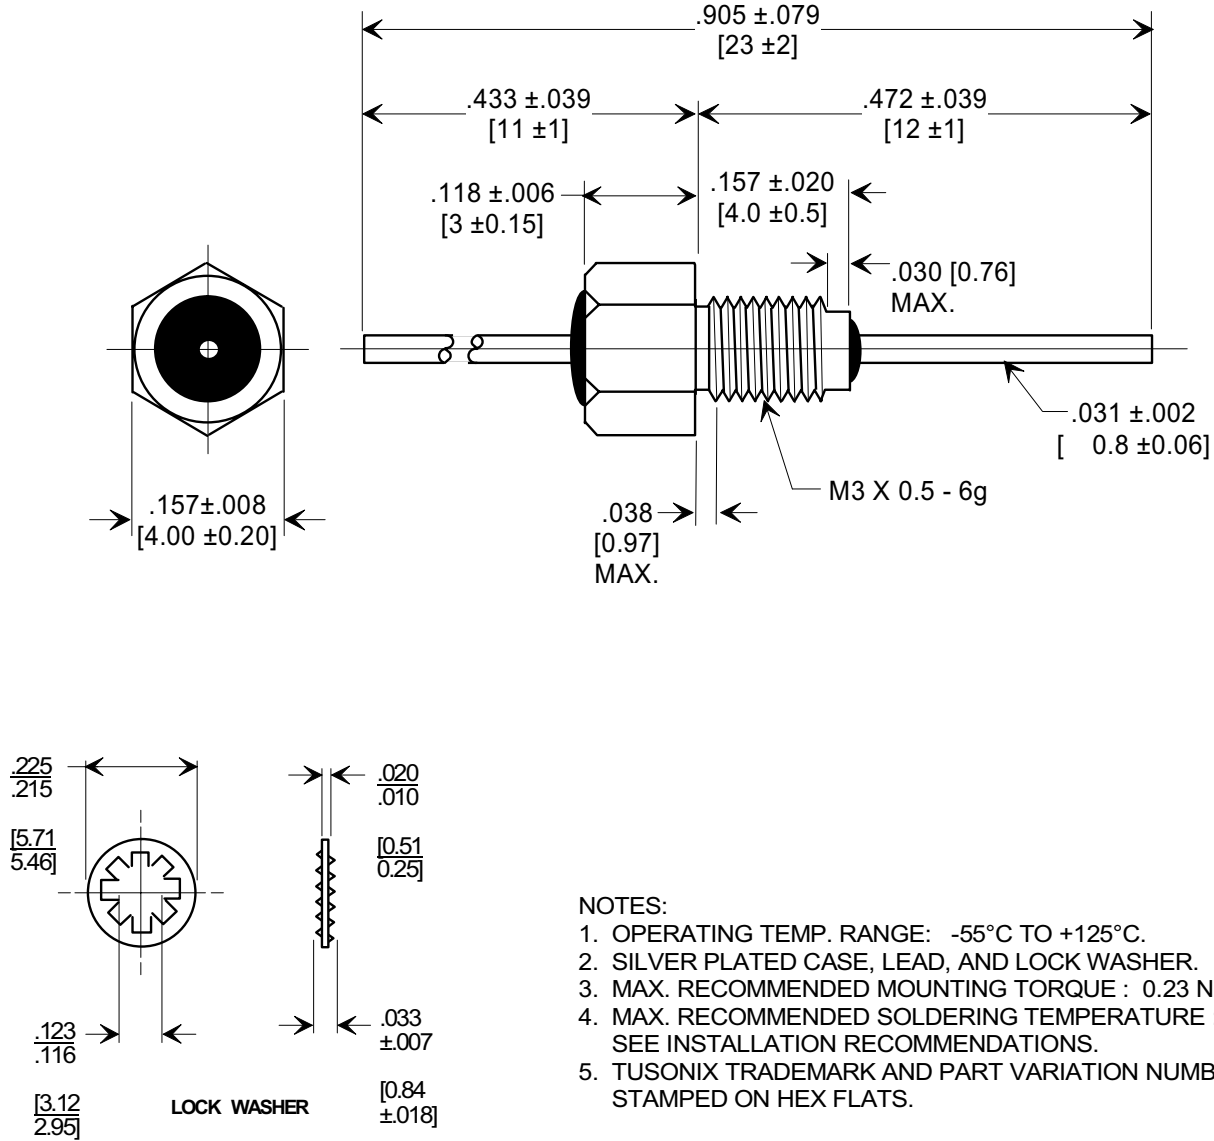


**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC [ ]**

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.



**NOTES:**

1. OPERATING TEMP. RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD, AND LOCK WASHER.
3. MAX. RECOMMENDED MOUNTING TORQUE : 0.23 Nm.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260° C. SEE INSTALLATION RECOMMENDATIONS.
5. TUSONIX TRADEMARK AND PART VARIATION NUMBER STAMPED ON HEX FLATS.

STYLE	VAR.	CAP.(pf)	TOLERANCE	DC WORKING VOLTAGE		DC CURRENT (AMPS)	DWV (VDC)	MIN. NO LOAD INSERTION LOSS (db) @ 25°C PER MIL-STD-220				
				85°C	125 °C			1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
4400	095	1,000	GMV	300	200	10	500	----	5	20	35	45

X-2015 Rev-0	REVISION RECORD	Original Release C.O. 19991013-1-03	0		--TOLERANCES-- Unless Otherwise Specified		Title <b>BUSHING STYLE EMI FILTER</b>	
					DECIMAL ± NOTED		Drawn S.M. 10-14-99	
					ANGLES ±		Approved E.F. 10-14-99	
					<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b> <b>4400-095</b>	