



SINO WEALTH

SH3750A

Programmable Encoder / Decoder

Features

- Single chip contains both Encoder and Decoder
- Operating Voltage Range: 3V - 11V
- On chip oscillator uses non-critical RC components
- Cross interference of receiver is virtually eliminated by circuitry which requires 4 valid words to be received, each within 64ms of the other
- Schmitt Trigger input provides excellent noise immunity
- Applications: alarm control system, security system, cordless telephone, and remote controls
- Interfaces with RF, ultrasonic, or infrared modulators and demodulators
- $2^{12} = 4096$ different codes



General Description

The SH3750A Encoder/Decoder is a CMOS/LSI digital code Transmitter/Receiver system. Working in the TRANSMIT (ENCODER) mode, the SH3750A will sequentially encode and transmit 12 bits of input. Each of the 12 bits may be 1 or 0 to allow 4096 different codes.

In the RECEIVE (DECODER) mode, the incoming signal is compared to the local code in a sequential manner. Once an error is detected the system will reset and


begin its comparison on the next word. If all 12 bits are received correctly, a "valid" signal is generated. This signal clears a 64ms counter and triggers a 3 stage counter. The 3 stage counter counts the "valid" pulses and when 4 pulses have been detected, the TX/RX output pin goes low. After the TX/RX output pin goes low, the next "valid" must be received within 128ms, otherwise, the TX/RX output will be disabled.

Pin Configurations

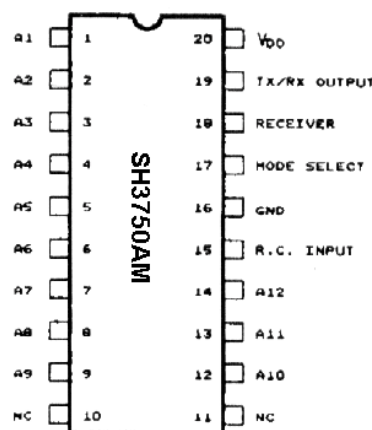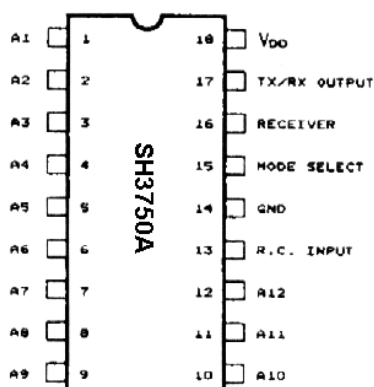



Block Diagram

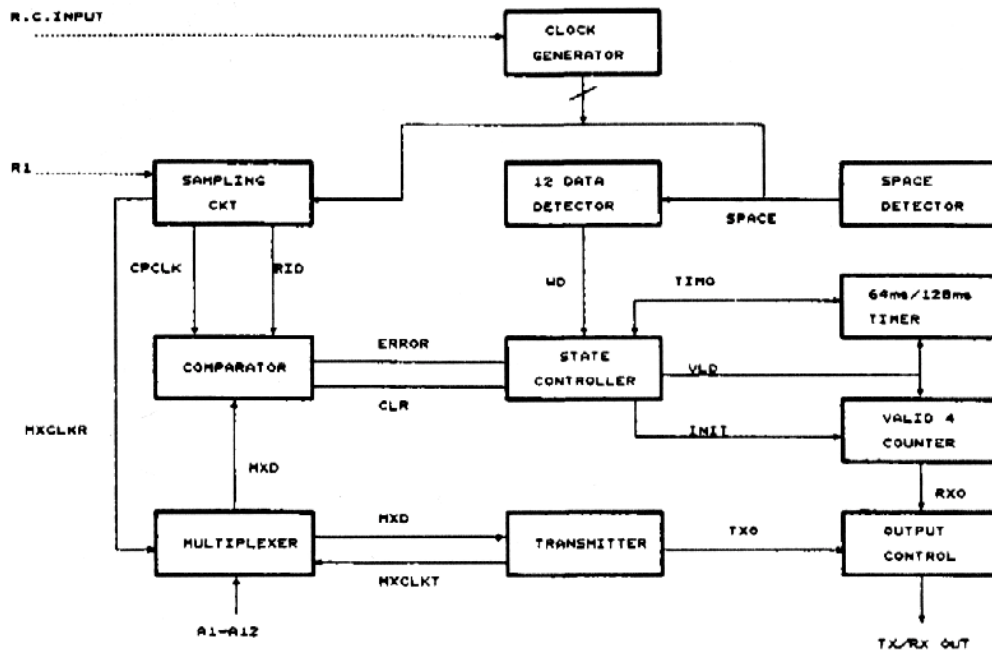

Block Diagram Description

CPLK: CLK of Comparator
MXCLKR: CLK of Multiplexer when in RECEIVE mode
MXCLKT: CLK of Multiplexer when in TRANSMIT mode
MXD: Output data of Multiplexer (one of A1, A2, ... A12)
RID: Sampled data by Sampling CKT
VLD: "Valid" signal. Used to trigger Valid 4 Counter and reset 64ms/128ms Timer

CLR: Clear signal of Comparator
ERROR: Error signal from Comparator
TIMO: TIMER time-out signal (64ms or 128ms)
TX/RX OUT: Transmitter/Receiver output pin
INIT: Reset signal of Valid 4 Counter
WD: Word detected signal
TXO: Transmitter output
RXO: Receiver output

**Absolute Maximum Ratings***

Power Supply Voltage.	-0.3V to 11V
Operating Temperature	-20°C +70°C
Storage Temperature (Tstg)	-55°C +150°C
Applied Voltage on any Pin	GND -0.3V < VIN < VDD +0.3V

***Comments**

Stresses above those listed under "Absolute Maximum Ratings*" may cause permanent damage to the device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied and exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC Electrical Characteristics (TA = 25°C, VDD = 9V, unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Operating Voltage	VDD	3.0	-	11	V	
Operating Current	IDD	-	-	1.2	mA	
Schmitt Trigger Input Level	-	-	5 1.5	-	V	Level 1 Level 0
Other Pins Input Level	VIH VIL	VDD - 0.5	-	GND + 0.5	V	Level 1 Level 0
Output Pin Logic Level	VOH VOL	VDD - 0.5	-	GND + 1	V	Isource = 5 µA Isink = 2 mA
Input Resistor to VDD	-	200K	-	1.2M	Ω	
Oscillator Frequency	F	-	100	-	KHz	15% exclusive of external part (For Reference)

Pin Description (for SH3750A)


Pin No.	Designation	Description
1 - 12	A1 - A12	These data select lines are used to set the addresses of the encoder/decoder pair. They have on-chip pull-up resistors
13	R.C.INPUT	R.C. input pin for single pin oscillator. A resistor is connected from this pin to VDD and a capacitor from this pin to GND. The frequency = 2/RC
14	GND	Ground pin
15	MODE SELECT	This pin changes the IC from RECEIVE mode to TRANSMIT mode. By grounding this pin the IC is put into the RECEIVE mode. By connecting to VDD the IC is put into the TRANSMIT mode
16	RECEIVER	The receiver input receives the digital PCM waveform from the detect circuit
17	TX/RX OUTPUT	In the TRANSMIT mode, this output pin produces the PCM waveform for transmitting. In the RECEIVE mode, this output pin provides the comparison result and detects low if comparison is ok
18	VDD	The positive power supply pin of the SH3750A

Note: The only difference between SH3750A and SH3750AM is that the latter has two extra NC pins.




SH3750A


Application Circuits (for reference only)

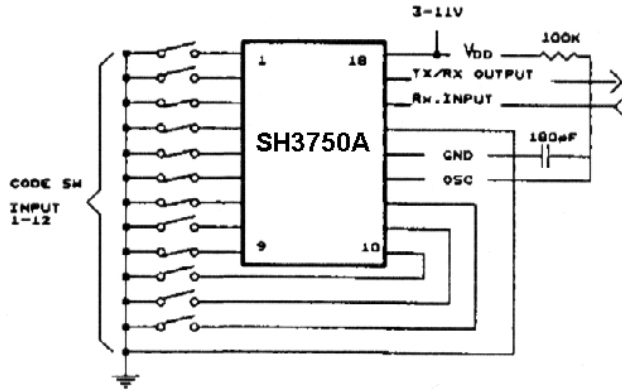


Pin Connections for RECEIVE Mode

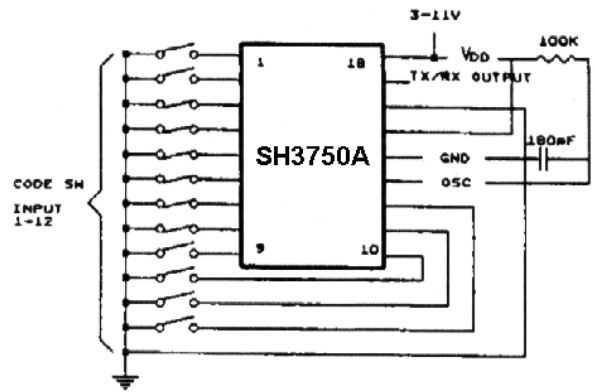

Pin Connections for TRANSMIT Mode

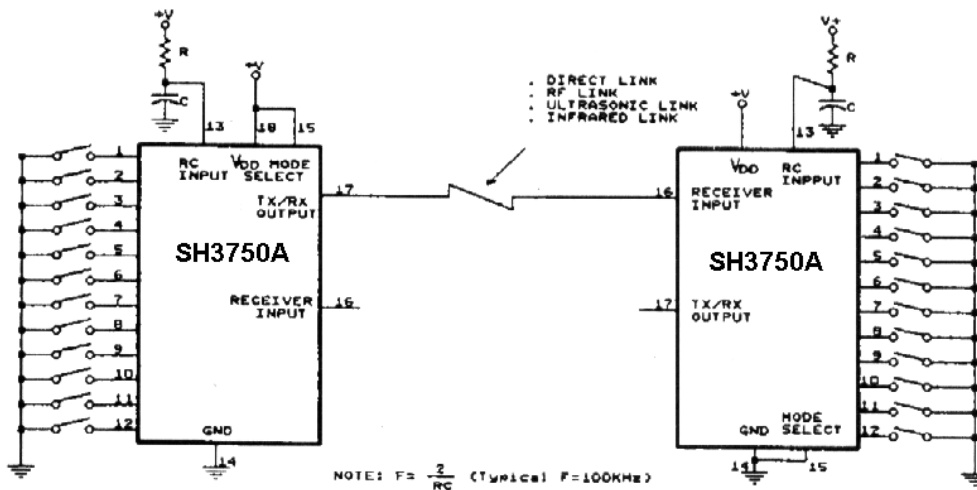


Output Waveform (based on 100 KHz)

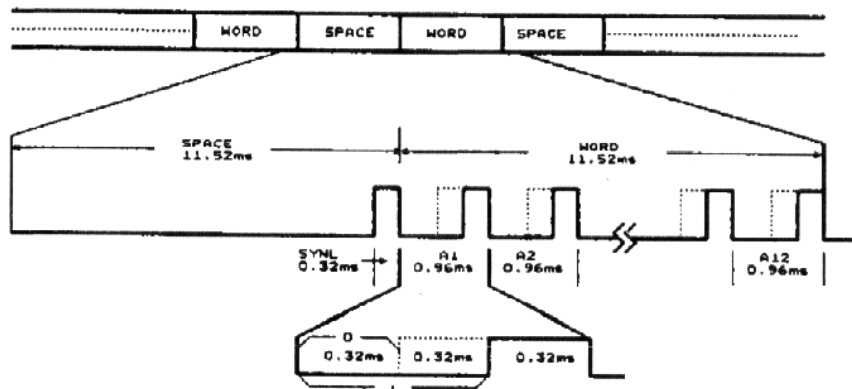



Decoder Flowchart

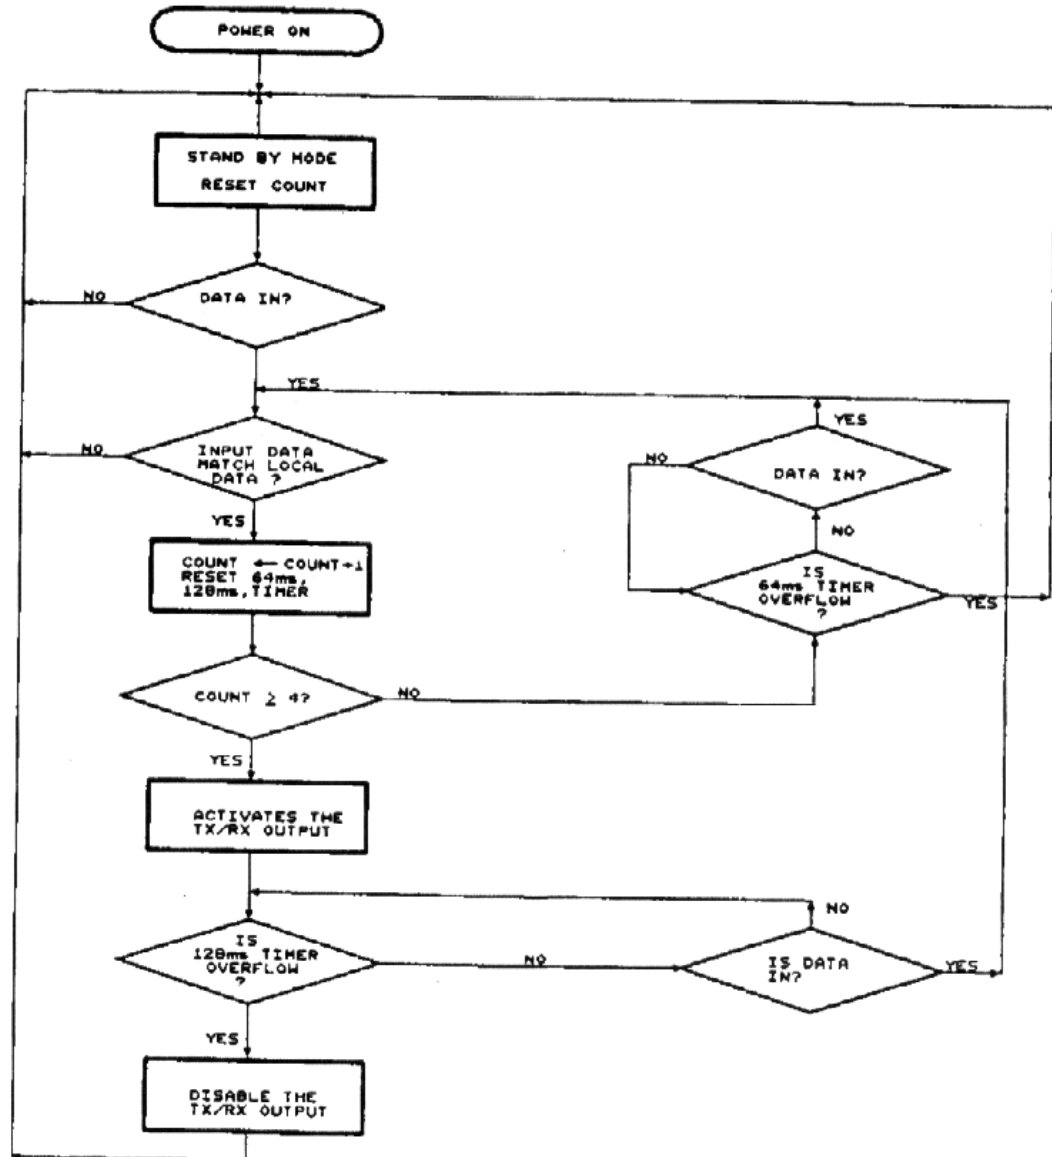

Ordering Information

Part No.	Package
SH3750A	18L DIP
SH3750AM	20L SOP




SH3750A

Package Information

DIP 18L Outline Dimensions

unit: inches / mm

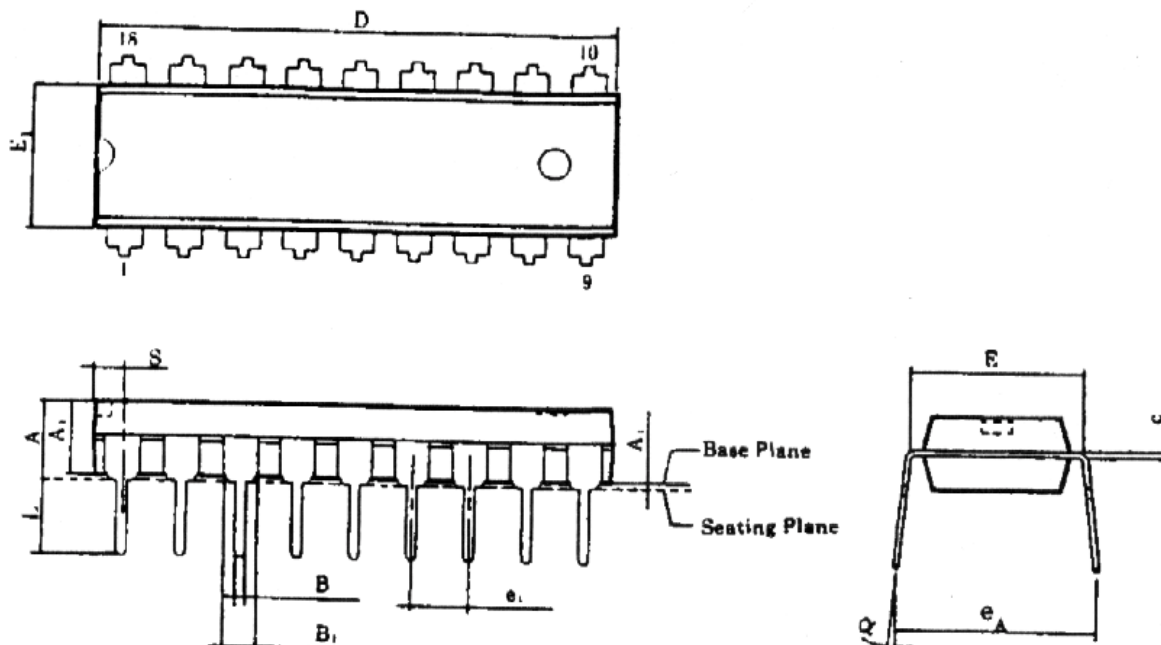

Symbol	Dimensions in inches	Dimensions in mm
A	0.175 Max.	4.45 Max.
A ₁	0.010 Min.	0.25 Min.
A ₂	0.130±0.010	3.30±0.25
B	0.018 ^{+0.004} _{-0.002}	0.46 ^{+0.10} _{-0.05}
B ₁	0.060 ^{+0.004} _{-0.002}	1.52 ^{+0.10} _{-0.05}
C	0.010 ^{+0.004} _{-0.002}	0.25 ^{+0.10} _{-0.05}
D	0.900 Typ. (0.920 Max.)	22.86 Typ. (23.37 Max.)
E	0.300±0.010	7.62±0.25
E ₁	0.250 Typ. (0.262 Max.)	6.35 Typ. (6.65 Max.)
e ₁	0.100±0.010	2.54±0.25
L	0.130±0.010	3.30±0.25
α	0°-15°	0°-15°
e _A	0.345±0.035	8.76±0.89
S	0.055 Max.	1.40 Max.

Notes:

1. The maximum value of dimension D includes end flash.
2. Dimension E₁ does not include resin fins.
3. Dimension S includes end flash.




SH3750A

Package Information

SOP 20L Outline Dimensions

unit: inches / mm

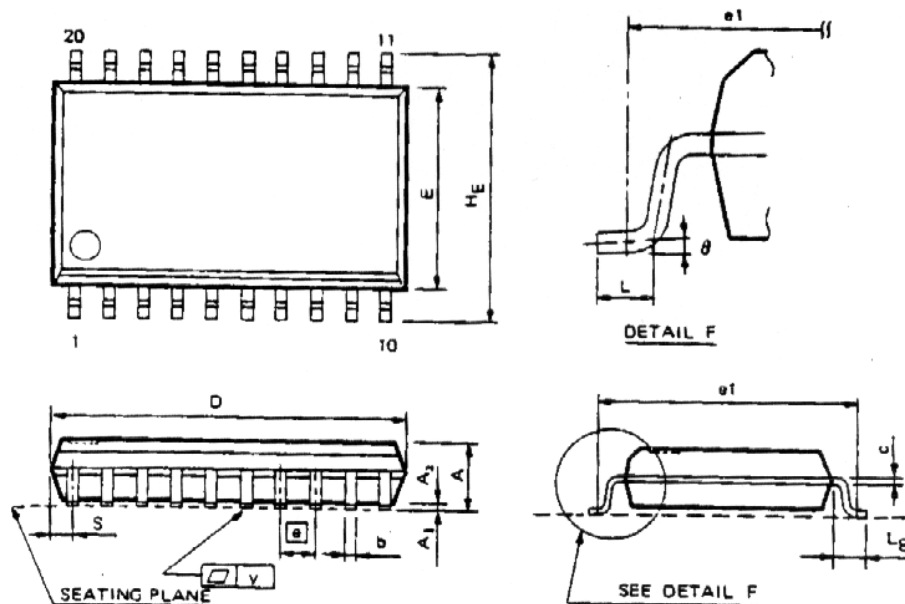

Symbol	Dimensions in inches	Dimensions in mm
A	0.106 Max.	2.69 Max.
A ₁	0.004 Min.	0.10 Min.
A ₂	0.092±0.005	2.33±0.13
b	0.016 ^{+0.004} _{-0.002}	0.41 ^{+0.10} _{-0.05}
C	0.010 ^{+0.004} _{-0.002}	0.25 ^{+0.10} _{-0.05}
D	0.504 Typ. (0.524 Max.)	12.80 Typ. (13.31 Max.)
E	0.295±0.010	7.49±0.25
\bar{e}	0.050±0.006	1.27±0.15
e ₁	0.376 NOM.	9.50 NOM.
H _E	0.406±0.012	10.31±0.31
L	0.032±0.008	0.81±0.20
L _E	0.055±0.008	1.40±0.20
S	0.042 Max.	1.07 Max.
y	0.004 Max.	0.10 Max.
θ	0°-10°	0°-10°

Notes:

1. The maximum value of dimension D includes end flash.
2. Dimension E does not include resin fins.
3. Dimension e₁ is for PC Board surface mount pad pitch design reference only.
4. Dimension S includes end flash.