



A 9060

Features:

- epoxy-encapsulated housing
- small dimensions

Application:

- indicator control in pocket cameras
- light intensity control of radio clocks
- exposure meters
- contrast control of TV sets

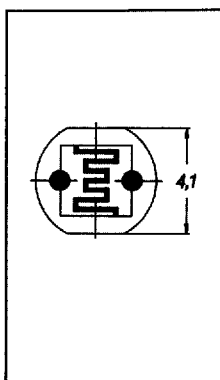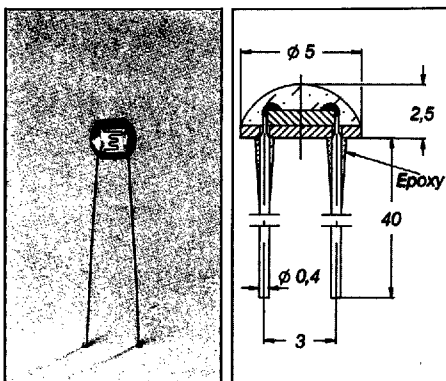

TYP	R ₁₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{on} [ms]	t _{off} [ms]	TK [%K]
A 9060 09	6	40	120	100	90	60	35	0,4
9060 11	14	60	180	150	90	60	35	0,3
9060 12	24	180	540	150	90	50	30	0,35
9060 13	57	500	1.500	150	90	35	28	0,4
9060 14	215	11.000	33.000	150	90	20	25	0,5
9060 31	96	400	1.200	300	90	60	35	0,3
9060 32	165	1.200	3.600	300	90	50	30	0,35
9060 33	400	3.600	10.800	300	90	35	28	0,4
9060 34	1.500	65.000	100.000	300	90	20	25	0,5

