
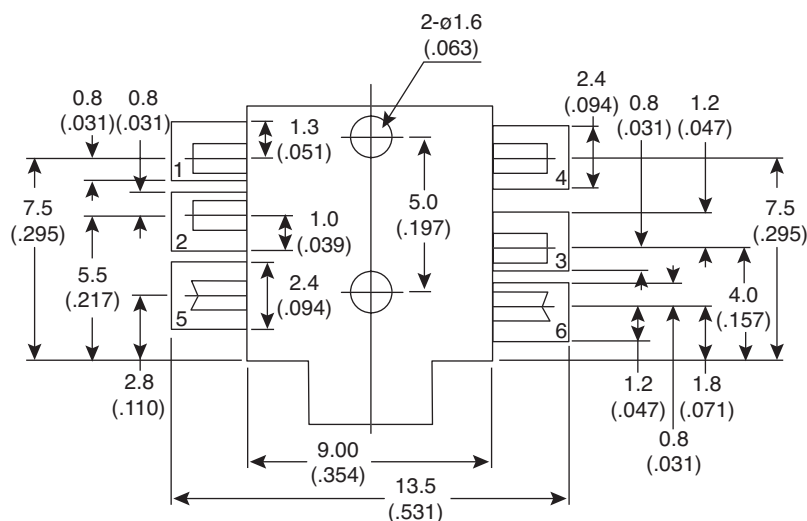
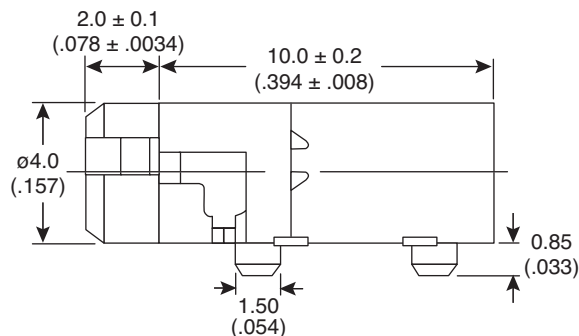


SMD Phone Jack

161-2624


KOBI CONN

SMD Phone Jack

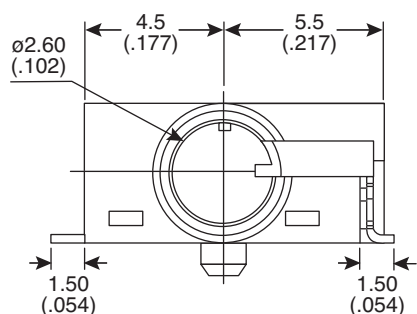

P.C.B Layout
(Bottom View)
± 0.1 (.0039)

Tolerance	
X.	0.6
X.X	0.3
X.XX	0.15



SPECIFICATIONS

Voltage rating:	16 VDC
Current rating:	0.3 A
Contact resistance:	30m Ω
Insulation resistance:	100M Ω 500 VDC
Dielectric strength:	500 VAC 1 min.
Durability:	5000 cycles
Insertion force:	.03 Kg to 2.0 Kg
Extraction force:	.2 Kg to 2.0 Kg
Soldering temperature:	260°C 5 sec.
Operating temperature:	-25°C to +85°C
Contacts:	Brass
Housing:	LCP
Plating contacts:	Phosphor bronze

Date Last Revised: 10-18-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300408

161-2624