



P-Channel 20-V (D-S) MOSFET

TrenchFET®

MOSFETs

1.5-V Rated

ESD Protected
2000 V

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (mA)
-20	8 @ $V_{GS} = -4.5$ V	-150
	12 @ $V_{GS} = -2.5$ V	-125
	15 @ $V_{GS} = -1.8$ V	-100
	20 @ $V_{GS} = -1.5$ V	-30

FEATURES


- High-Side Switching
- Low On-Resistance: 8 Ω
- Low Threshold: 0.9 V (typ)
- Fast Switching Speed: 45 ns
- 1.8-V Operation
- Gate-Source ESD Protection

BENEFITS

- Ease in Driving Switches
- Low Offset (Error) Voltage
- Low-Voltage Operation
- High-Speed Circuits
- Low Battery Voltage Operation

APPLICATIONS

- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories
- Battery Operated Systems
- Power Supply Converter Circuits
- Load/Power Switching Cell Phones, Pagers



SC-75A (SOT-416): Si1031R
SC-89 (SOT-490): Si1031X

Marking Code: H

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Si1031R		Si1031X		Unit
			5 secs	Steady State	5 secs	Steady State	
Drain-Source Voltage		V _{DS}	-20				V
Gate-Source Voltage		V _{GS}	± 6				
Continuous Drain Current (T _J = 150°C) ^a	T _A = 25°C	I _D	-150	-140	-165	-155	mA
	T _A = 85°C		-110	-100	-150	-125	
Pulsed Drain Current ^a		I _{DM}	-500		-600		
Continuous Source Current (diode conduction) ^a		I _S	-250	-200	-340	-240	
Maximum Power Dissipation ^a	T _A = 25°C	P _D	280	250	340	300	mW
	T _A = 85°C		145	130	170	150	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	-55 to 150				°C
Gate-Source ESD Rating (HBM, Method 3015)		ESD	2000				V

Notes

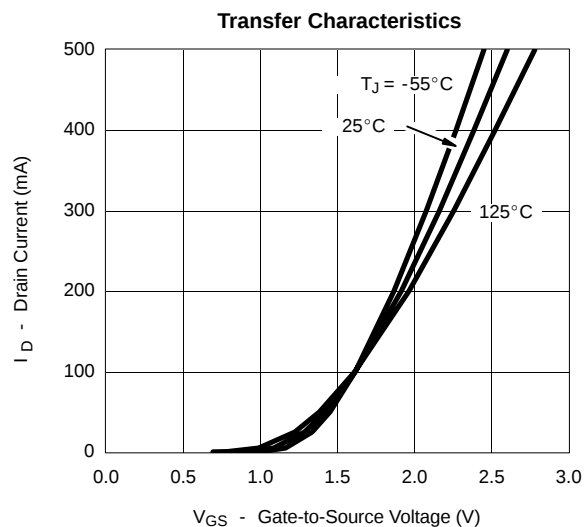
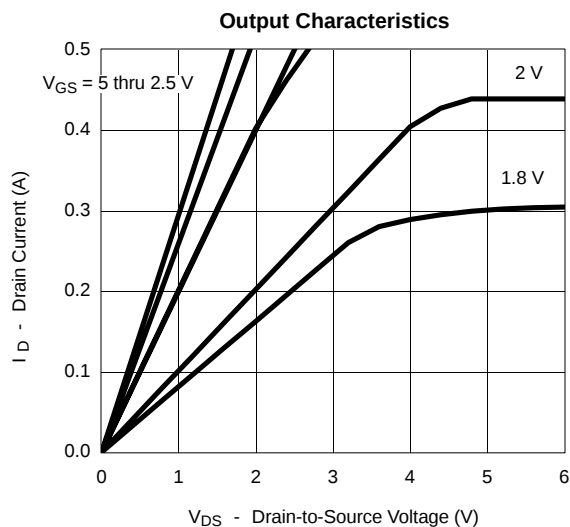
a. Surface Mounted on FR4 Board.

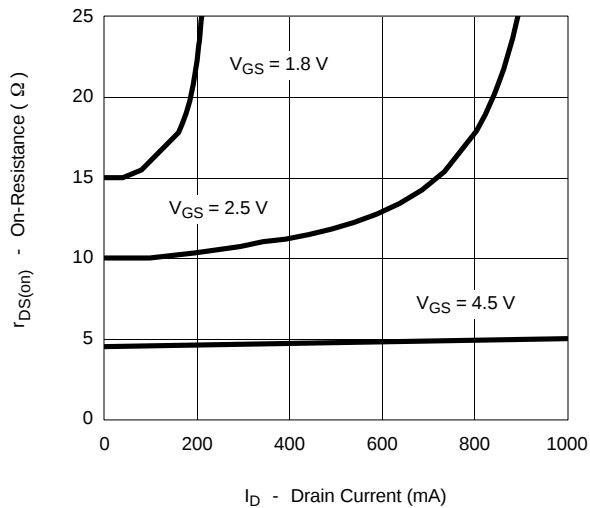
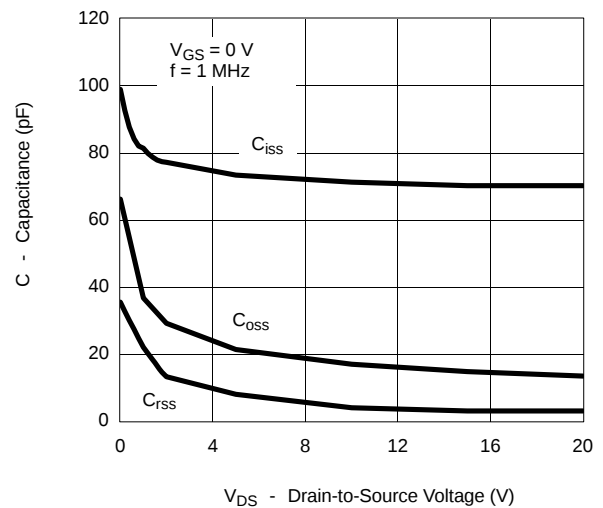
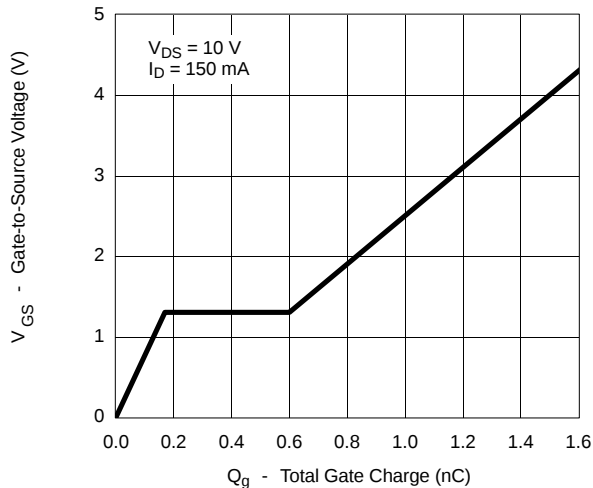
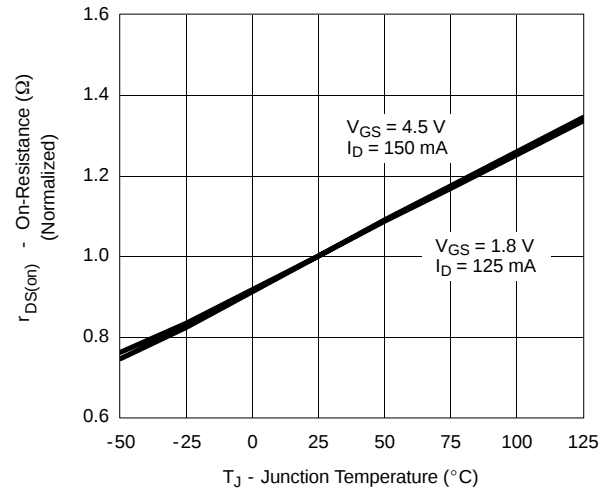
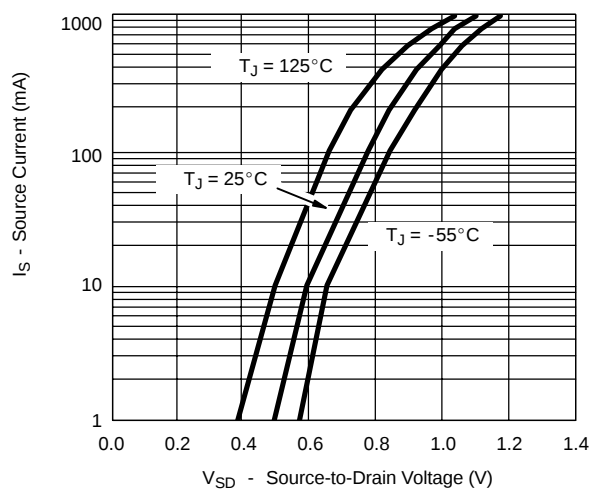
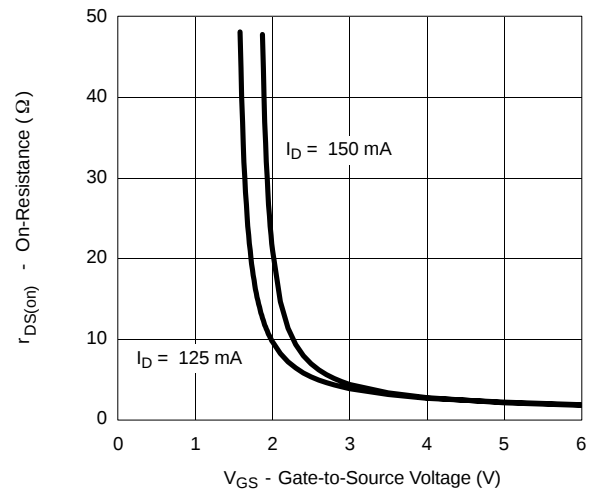
SPECIFICATIONS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

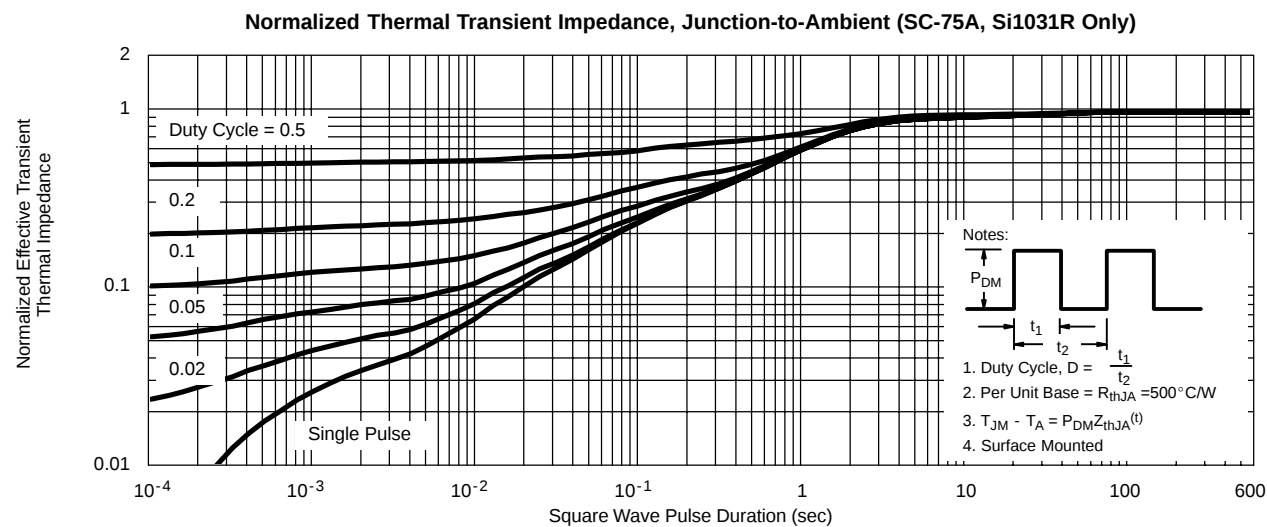
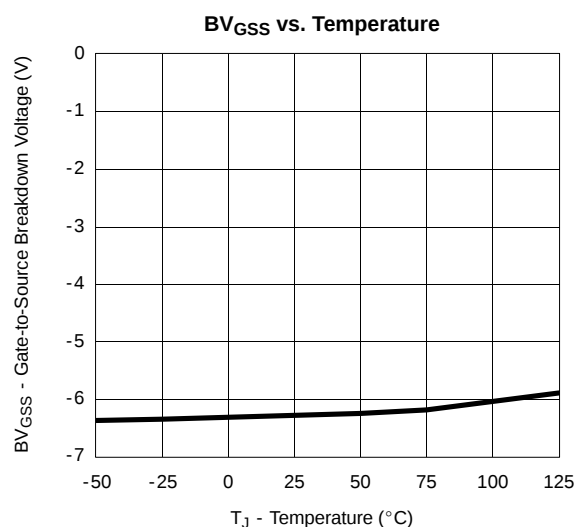
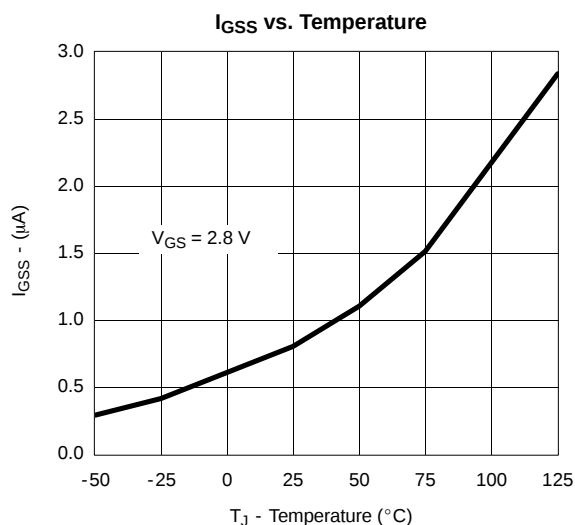
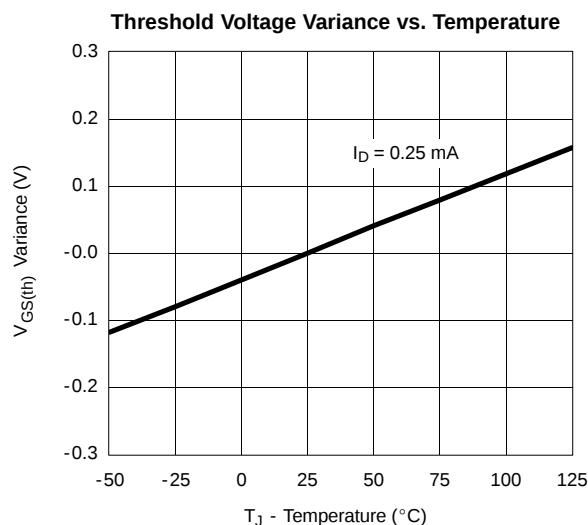
Parameter	Symbol	Test Condition	Min	Typ ^a	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$	-0.40		-1.20	V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}, V_{GS} = \pm 2.8\ \text{V}$		± 0.5	± 1	μA
		$V_{DS} = 0\ \text{V}, V_{GS} = \pm 4.5\ \text{V}$		± 1	± 2	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -16\ \text{V}, V_{GS} = 0\ \text{V}$		-1	-500	nA
		$V_{DS} = -16\ \text{V}, V_{GS} = 0\ \text{V}, T_J = 85^\circ\text{C}$			-10	μA
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} = -5\ \text{V}, V_{GS} = -4.5\ \text{V}$	-200			mA
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = -4.5\ \text{V}, I_D = -150\ \text{mA}$			8	Ω
		$V_{GS} = -2.5\ \text{V}, I_D = -125\ \text{mA}$			12	
		$V_{GS} = -1.8\ \text{V}, I_D = -100\ \text{mA}$			15	
		$V_{GS} = -1.5\ \text{V}, I_D = -30\ \text{mA}$			20	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -10\ \text{V}, I_D = -150\ \text{mA}$		0.4		S
Diode Forward Voltage ^a	V_{SD}	$I_S = -150\ \text{mA}, V_{GS} = 0\ \text{V}$			-1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -10\ \text{V}, V_{GS} = -4.5\ \text{V}, I_D = -150\ \text{mA}$		1500		pC
Gate-Source Charge	Q_{gs}			150		
Gate-Drain Charge	Q_{gd}			450		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10\ \text{V}, R_L = 65\ \Omega$ $I_D \cong -150\ \text{mA}, V_{GEN} = -4.5\ \text{V}, R_G = 10\ \Omega$			55	ns
Rise Time	t_r				30	
Turn-Off Delay Time	$t_{d(off)}$				60	
Fall Time	t_f				30	

Notes

- a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.
b. Guaranteed by design, not subject to production testing.

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS NOTED)

**TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS NOTED)****On-Resistance vs. Drain Current****Capacitance****Gate Charge****On-Resistance vs. Junction Temperature****Source-Drain Diode Forward Voltage****On-Resistance vs. Gate-to-Source Voltage**

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS NOTED)




Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.