


316-0968

EBT TECHNOLOGIES LIMITED,

RE: SPECIFICATIONS OF TORCH BULBS

SPECIFICATION DATA

YOUR PART NO.	DESIGNED VOLTS	DESIGNED AMPERE	VACUUM/ GAS FILLED	FILAMENT DESIGNATION	GLASS ENVELOPE	BASE	LUMEN	LIFE TIME	FIG.
1321 0800	2.4V	0.5A $\pm$ 10%	VACUUM	C-2R	OLIVE	P13.58	10.00 lm	15 hours	1
1321 1100	2.5V	0.3A $\pm$ 10%	VACUUM	C-2R	OLIVE	P13.58	6.8 lm	10 hours	1
1321 1303	3.6V	0.5A $\pm$ 10%	VACUUM	C-2R	OLIVE	P13.58	20.00 lm	15 hours	1
1321 1550	4.8V	0.5A $\pm$ 10%	VACUUM	C-2R	OLIVE	P13.58	25.00 lm	15 hours	1
1321 1700	5.9V	0.5A $\pm$ 10%	VACUUM	C-2R	OLIVE	P13.58	35.00 lm	15 hours	1
1321 080K	2.4V	0.7A $\pm$ 10%	KRYPTON	C-2R	OLIVE	P13.58	16.50 lm	15 hours	2
1321 155K	4.8V	0.5A $\pm$ 10%	KRYPTON	C-2R	OLIVE	P13.58	32.00 lm	15 hours	2
1321 156K	4.8V	0.75A $\pm$ 10%	KRYPTON	C-2R	OLIVE	P13.58	51.00 lm	20 hours	2
1310 0503	2.2V	0.25A $\pm$ 10%	VACUUM	C-2R	TEAT	E10x12	—	5 hours	3
222EBT0088	2.2V	0.25A $\pm$ 10%	VACUUM	C-2R	TEAT	E10x12	—	5 hours	3
1300 0100	2.4V	0.3A $\pm$ 10%	VACUUM	C-2R	NF BRILLANT	E10x13	—	5 hours	4

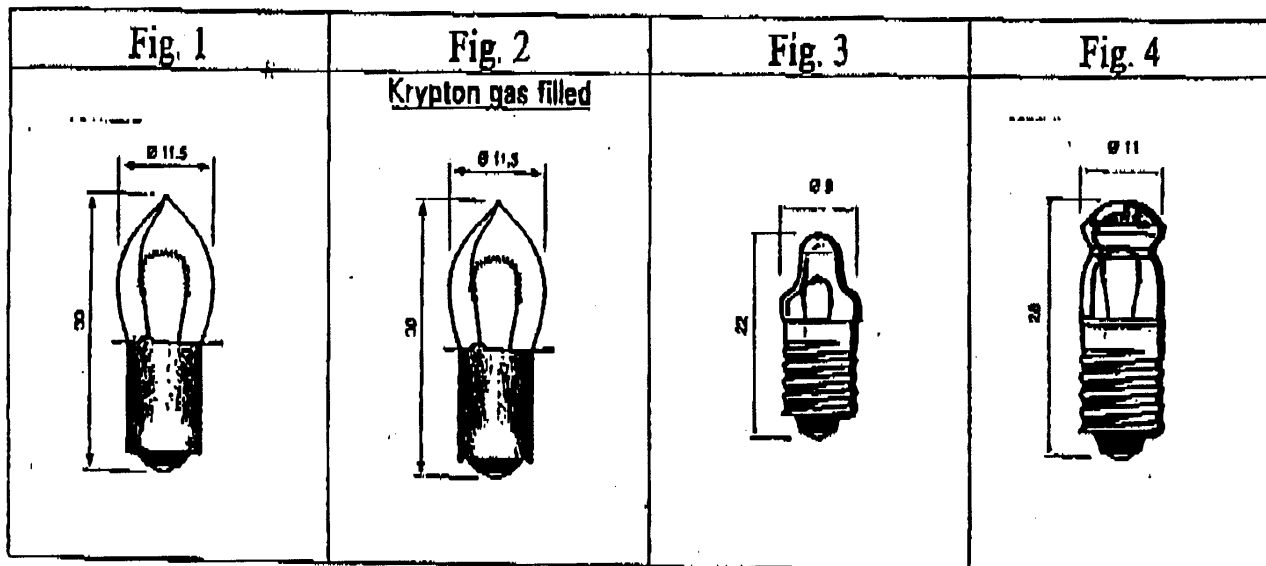

1017'98