



# 1N4001SG THRU 1N4007SG

## 1.0 AMP. Glass Passivated Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
1.0 Ampere


### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧  $\phi$  0.6mm leads

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.22 gram

### A-405

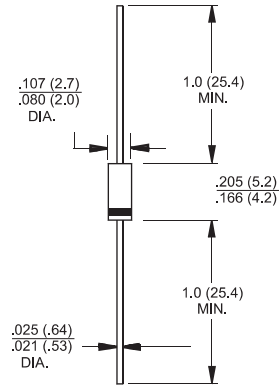

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	1N 4001SG	1N 4002SG	1N 4003SG	1N 4004SG	1N 4005SG	1N 4006SG	1N 4007SG	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length @ $T_A = 50^\circ\text{C}$	$I_{(AV)}$	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	$V_F$	1.0							V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	5.0 100							$\mu\text{A}$ $\mu\text{A}$
Typical Thermal Resistance (Note 2)	$R\theta_{JA}$	80							$^\circ\text{C/W}$
Typical Junction Capacitance ( Note 1 )	$C_j$	10							pF
Operating and Storage Temperature Range	$T_J, T_{STG}$	- 65 to + 150							$^\circ\text{C}$

Note: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

2. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.

## RATINGS AND CHARACTERISTIC CURVES (1N4001SG THRU 1N4007SG)

FIG. 1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

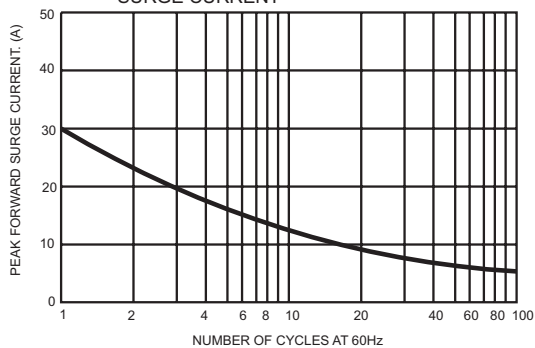


FIG. 2- MAXIMUM FORWARD CURRENT DERATING CURVE

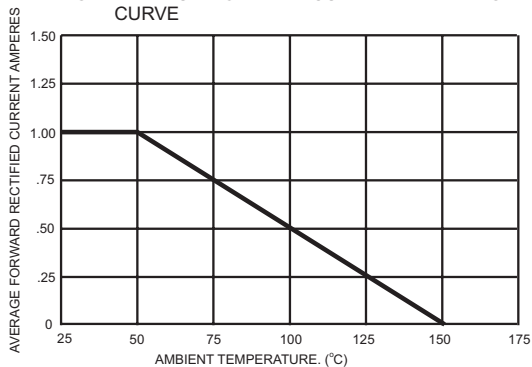


FIG. 3- TYPICAL JUNCTION CAPACITANCE

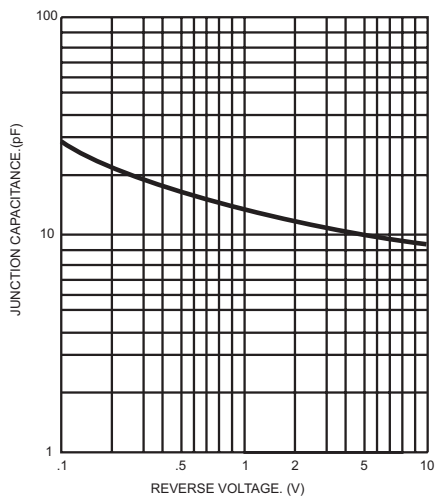


FIG. 4- TYPICAL FORWARD CHARACTERISTICS

