


### 9.6x9.6 Square/ Single Turn /Trimming Potentiometer


-- 3386T --

..... Mutual dimension.....

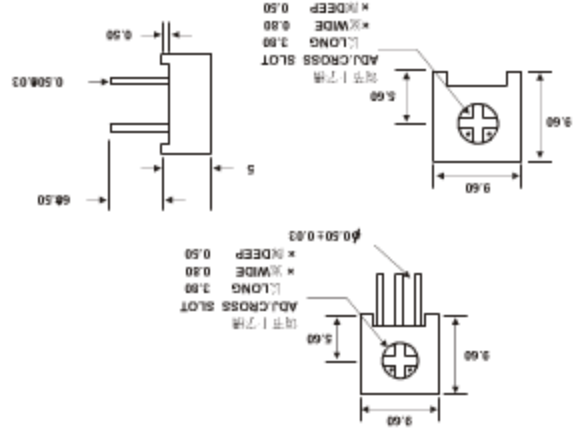

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Special resistances available
100	10	205
200	20	105
500	50	504
101	100	254
201	200	204
501	500	104
102	1,000	503
202	2,000	253
502	5,000	203
103	10,000	103
203	20,000	502
503	50,000	202
104	100,000	102
204	200,000	501
254	250,000	201
504	500,000	101
105	1,000,000	500
205	2,000,000	100

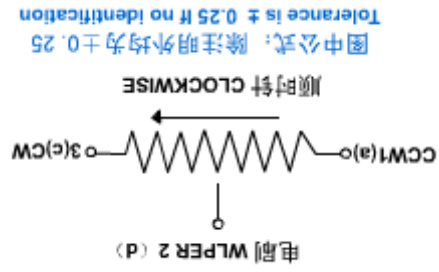

图中公式：除注明外均为±0.25  
Tolerance is ± 0.25 if no identification

### Electrical Characteristics

Standard Resistance Range.....50Ω~2MΩ  
Resistance Tolerance.....±10%  
Absolute Minimum Resistance.....≤1%R或10Ω  
Contact Resistance Variation.....CRV≤3%

Insulation Resistance.....R1≥1GΩ  
(100Vac)  
Withstand Voltage.....600Vac  
Effective Travel.....300°

### Environmental Characteristics


Power Rating, 315 volts max  
0.5W@70°C,0W@125°C  
Temperature Range.....-55°C~125°C  
Temperature Coefficient.....±50ppm/°C  
Temperature Variation.....55°C,30min,+125°C

5cycles.....30min  
ΔR≤5%R,Δ(Uab/Uac)≤10%

Collision.....100m/s<sup>2</sup>,1000cycles,ΔR≤2%R  
Electrical Endurance at 70°C.....0.5W@70°C  
1000h,ΔR≤10%R

Rotational Life.....200cycles  
ΔR≤10%R,CRV≤3% or 5Ω

### Physical Characteristics

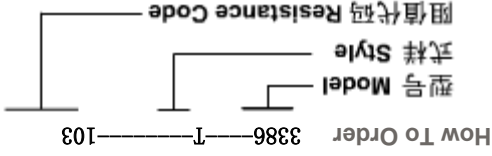

..... Install dimension.....