



# 28C16A

## 16K (2K x 8) CMOS Electrically Erasable PROM

### FEATURES


- Fast Read Access Time—150ns
- CMOS Technology for Low Power Dissipation
  - 30mA Active
  - 100µA Standby
- Fast Byte Write Time—200µs or 1ms
- Data Retention >10 years
- High Endurance - Minimum 10<sup>4</sup> Erase/Write Cycles
- Automatic Write Operation
  - Internal Control Timer
  - Auto-Clear Before Write Operation
  - On-Chip Address and Data Latches
- Data polling
- Chip Clear Operation
- Enhanced Data Protection
  - Vcc Detector
  - Pulse Filter
  - Write Inhibit
- Electronic Signature for Device Identification
- 5-Volt-Only Operation
- Organized 2Kx8 JEDEC Standard Pinout
  - 24-pin Dual-In-Line Package
  - 32-pin Chip Carrier (Leadless or Plastic)
  - 28-pin Thin Small Outline Package (TSOP)
- Available for Extended Temperature Ranges:
  - Commercial: 0° C to 70° C
  - Industrial: -40° C to 85° C

### DESCRIPTION




The Microchip Technology Inc 28C16A is a CMOS 16K non-volatile electrically Erasable and Programmable Read Only Memory. The 28C16A is accessed like a static RAM for the read or write cycles without the need of external components. During a "byte write", the

address and data are latched internally, freeing the microprocessor address and data bus for other operations. Following the initiation of write cycle, the device will go to a busy state and automatically clear and write the latched data using an internal control timer. To determine when a write cycle is complete, the 28C16A uses Data polling. Data polling allows the user to read the location last written to when the write operation is complete. CMOS design and processing enables this part to be used in systems where reduced power consumption and reliability are required. A complete family of packages is offered to provide the utmost flexibility in applications.

### BLOCK DIAGRAM

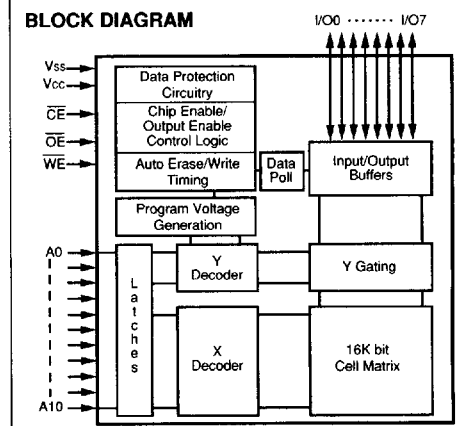

### PIN CONFIGURATION

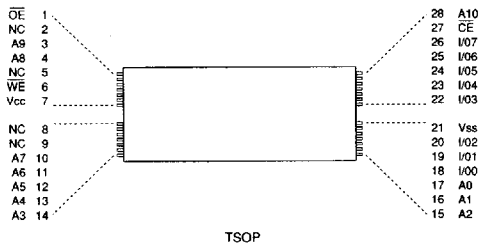

● Pin 1 indicator on PLCC on top of package

**28C16A**

MICROCHIP TECHNOLOGY INC

**ELECTRICAL CHARACTERISTICS****MAXIMUM RATINGS\***

V<sub>CC</sub> and input voltages w.r.t. V<sub>SS</sub> ..... -0.6V to + 6.25V  
 Voltage on  $\overline{OE}$  w.r.t. V<sub>SS</sub> ..... -0.6V to +13.5V  
 Voltage on A<sub>9</sub> w.r.t. V<sub>SS</sub> ..... -0.6V to +13.5V  
 Output Voltage w.r.t. V<sub>SS</sub> ..... -0.6V to V<sub>CC</sub>+0.6V  
 Storage temperature ..... -65° C to 125° C  
 Ambient temp. with power applied ..... -50° C to 95° C

\*Notice: Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**PIN FUNCTION TABLE**

Name	Function
A0 - A10	Address Inputs
$\overline{CE}$	Chip Enable
$\overline{OE}$	Output Enable
$\overline{WE}$	Write Enable
I/O0 - I/O7	Data Inputs/Outputs
V <sub>CC</sub>	+5V Power Supply
V <sub>SS</sub>	Ground
NC	No Connect; No Internal Connection
NU	Not Used; No External Connection is Allowed

**READ / WRITE OPERATION  
DC Characteristics**V<sub>CC</sub> = +5V ±10%

Commercial (C): Tamb = 0° C to 70° C

Industrial (I): Tamb = -40° C to 85° C

Parameter	Status	Symbol	Min	Max	Units	Conditions
Input Voltages	Logic "1" Logic "0"	V <sub>IH</sub> V <sub>IL</sub>	2.0 -0.1	V <sub>CC</sub> +1 0.8	V V	
Input Leakage		I <sub>LI</sub>	-10	10	μA	V <sub>IN</sub> = -0.1V to V <sub>CC</sub> +1
Input Capacitance		C <sub>IN</sub>		10	pF	V <sub>IN</sub> = 0V; Tamb = 25° C; f = 1 MHz
Output Voltages	Logic "1" Logic "0"	V <sub>OH</sub> V <sub>OL</sub>	2.4	0.45	V V	I <sub>OH</sub> = -400μA I <sub>OL</sub> = 2.1mA
Output Leakage		I <sub>LO</sub>	-10	10	μA	V <sub>OUT</sub> = -0.1V to V <sub>CC</sub> +0.1V
Output Capacitance		C <sub>OUT</sub>		12	pF	V <sub>IN</sub> = 0V; Tamb = 25° C; f = 1 MHz
Power Supply Current, Active	TTL input	I <sub>CC</sub>		30	mA	f = 5 MHz (Note 1) V <sub>CC</sub> = 5.5V;
Power Supply Current, Standby	TTL input TTL input CMOS input	I <sub>CC(S)TTL</sub> I <sub>CC(S)TTL</sub> I <sub>CC(S)CMOS</sub>		2 3 100	mA mA μA	$\overline{CE}$ = V <sub>IH</sub> (0° C to 70° C) $\overline{CE}$ = V <sub>IH</sub> (-40° C to 85° C) $\overline{CE}$ = V <sub>CC</sub> -0.3 to V <sub>CC</sub> +1


Note: (1) AC power supply current above 5 MHz: 1 mA/MHz

## MICROCHIP TECHNOLOGY INC

**READ OPERATION  
AC Characteristics**

AC Testing Waveform:  $V_{IH} = 2.4V$ ;  $V_{IL} = 0.45V$ ;  $V_{OH} = 2.0V$ ;  $V_{OL} = 0.8V$   
 Output Load: 1 TTL Load + 100 pF  
 Input Rise and Fall Times: 20 nsec  
 Ambient Temperature: Commercial (C):  $T_{amb} = 0^{\circ}C$  to  $70^{\circ}C$   
 Industrial (I):  $T_{amb} = -40^{\circ}C$  to  $85^{\circ}C$

Parameter	Sym	28C16A-15		28C16A-20		28C16A-25		Units	Conditions
		Min	Max	Min	Max	Min	Max		
Address to Output Delay	$t_{ACC}$		150		200		250	ns	$\overline{OE} = \overline{CE} = V_{IL}$
$\overline{CE}$ to Output Delay	$t_{CE}$		150		200		250	ns	$\overline{OE} = V_{IL}$
$\overline{OE}$ to Output Delay	$t_{OE}$		70		80		100	ns	$\overline{CE} = V_{IL}$
$\overline{CE}$ or $\overline{OE}$ High to Output Float	$t_{OFF}$	0	50	0	55	0	70	ns	
Output Hold from Address, $\overline{CE}$ or $\overline{OE}$ , whichever occurs first.	$t_{OH}$	0		0		0		ns	

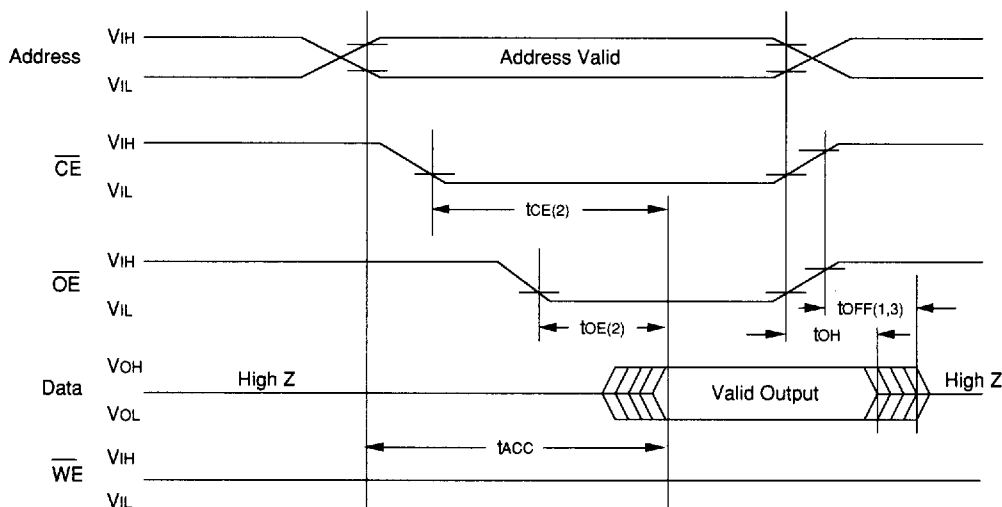**READ WAVEFORMS**

- Notes: (1)  $t_{OFF}$  is specified for  $\overline{OE}$  or  $\overline{CE}$ , whichever occurs first  
 (2)  $\overline{OE}$  may be delayed up to  $t_{CE} - t_{OE}$  after the falling edge of  $\overline{CE}$  without impact on  $t_{CE}$   
 (3) This parameter is sampled and is not 100% tested


**BYTE WRITE  
AC Characteristics**

AC Testing Waveform:  $V_{IH} = 2.4V$  and  $V_{IL} = 0.45V$ ;  $V_{OH} = 2.0V$ ;  $V_{OL} = 0.8V$   
 Output Load: 1 TTL Load + 100 pF  
 Input Rise/Fall Times: 20 nsec  
 Ambient Temperature: Commercial (C):  $T_{amb} = 0^{\circ}C$  to  $70^{\circ}C$   
 Industrial (I):  $T_{amb} = -40^{\circ}C$  to  $85^{\circ}C$



Parameter	Symbol	Min	Max	Units	Remarks
Address Set-Up Time	tAS	10		ns	
Address Hold Time	tAH	50		ns	
Data Set-Up Time	tDS	50		ns	
Data Hold Time	tDH	10		ns	
Write Pulse Width	twPL	100		ns	Note 1
Write Pulse High Time	twPH	50		ns	
$\overline{OE}$ Hold Time	tOEH	10		ns	
$\overline{OE}$ Set-Up Time	tOES	10		ns	
Data Valid Time	tDV		1000	ns	Note 2
Write Cycle Time (28C16A)	twc		1	ms	0.5 ms typical
Write Cycle Time (28C16AF)	twc		200	$\mu s$	100 $\mu s$ typical

Note: (1) A write cycle can be initiated by  $\overline{CE}$  or  $\overline{WE}$  going low, whichever occurs last. The data is latched on the positive edge of  $\overline{CE}$  or  $\overline{WE}$ , whichever occurs first.

(2) Data must be valid within 1000ns max. after a write cycle is initiated and must be stable at least until tDH after the positive edge of  $\overline{WE}$  or  $\overline{CE}$ , whichever occurs first.

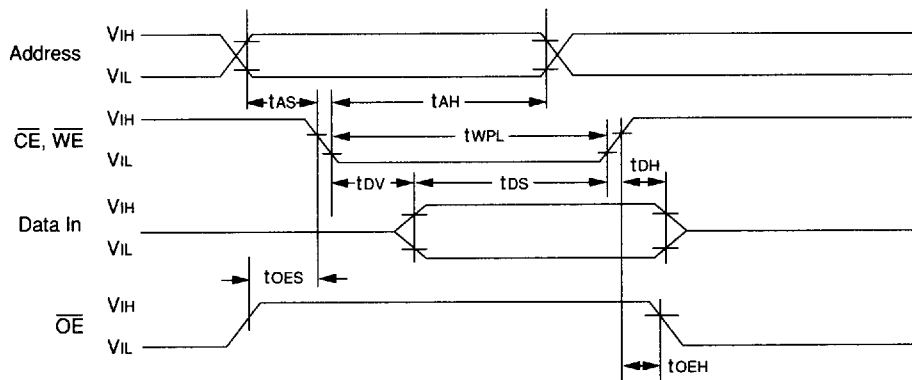**PROGRAMMING  
Waveforms**

## MICROCHIP TECHNOLOGY INC

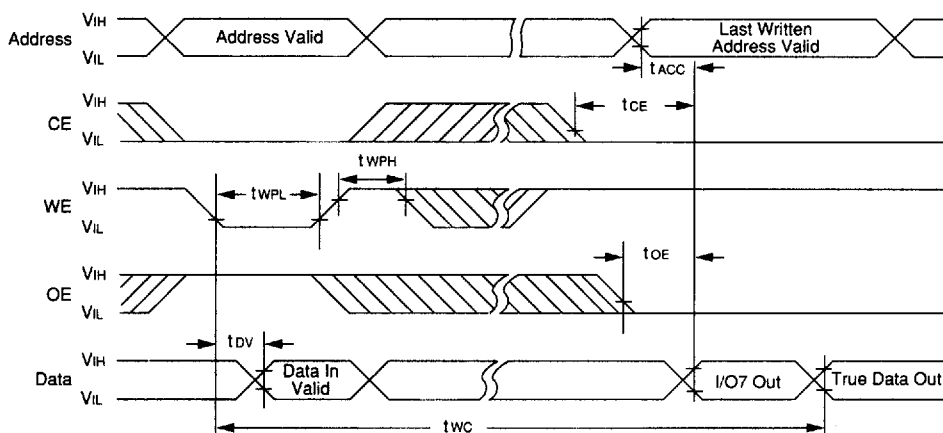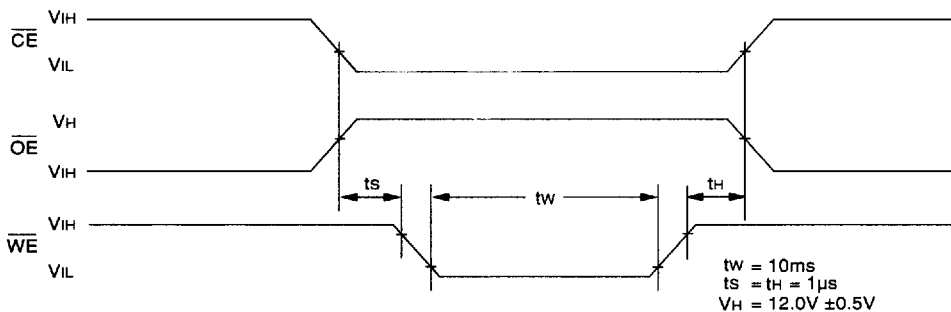DATA POLLING  
WaveformsCHIP CLEAR  
Waveforms

## SUPPLEMENTARY CONTROL

Mode	$\overline{\text{CE}}$	$\overline{\text{OE}}$	$\overline{\text{WE}}$	A9	Vcc	I/O
Chip Clear	V <sub>IL</sub>	V <sub>H</sub>	V <sub>IL</sub>	X	Vcc	
Extra Row Read	V <sub>IL</sub>	V <sub>IL</sub>	V <sub>H</sub>	A9 = V <sub>H</sub>	Vcc	Data Out
Extra Row Write	*	V <sub>H</sub>	*	A9 = V <sub>H</sub>	Vcc	Data In

Note: V<sub>H</sub> = 12.0V ± 0.5V

\* Pulsed per programming waveforms.

## MICROCHIP TECHNOLOGY INC

## DEVICE OPERATION

The Microchip Technology Inc 28C16A has four basic modes of operation—read, standby, write inhibit, and byte write—as outlined in the following table.

Operation Mode	$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	I/O
Read	L	L	H	DOU
Standby	H	X	X	High Z
Write Inhibit	H	X	X	High Z
Write Inhibit	X	L	X	High Z
Write Inhibit	X	X	H	High Z
Byte Write	L	H	L	DIN
Byte Clear	Automatic Before Each "Write"			

X = Any TTL level.

**Read Mode**

The 28C16A has two control functions, both of which must be logically satisfied in order to obtain data at the outputs. Chip enable ( $\overline{CE}$ ) is the power control and should be used for device selection. Output Enable ( $\overline{OE}$ ) is the output control and is used to gate data to the output pins independent of device selection. Assuming that addresses are stable, address access time ( $t_{ACC}$ ) is equal to the delay from  $\overline{CE}$  to output ( $t_{CE}$ ). Data is available at the output  $t_{OE}$  after the falling edge of  $\overline{OE}$ , assuming that  $\overline{CE}$  has been low and addresses have been stable for at least  $t_{ACC}-t_{OE}$ .

**Standby Mode**

The 28C16A is placed in the standby mode by applying a high signal to the  $\overline{CE}$  input. When in the standby mode, the outputs are in a high impedance state, independent of the  $\overline{OE}$  input.

**Data Protection**

In order to ensure data integrity, especially during critical power-up and power-down transitions, the following enhanced data protection circuits are incorporated:

First, an internal  $V_{CC}$  detect (3.3 volts typical) will inhibit the initiation of non-volatile programming operation when  $V_{CC}$  is less than the  $V_{CC}$  detect circuit trip.

Second, there is a  $\overline{WE}$  filtering circuit that prevents  $\overline{WE}$  pulses of less than 10ns duration from initiating a write cycle.

Third, holding  $\overline{WE}$  or  $\overline{CE}$  high or  $\overline{OE}$  low, inhibits a write cycle during power-on and power-off ( $V_{CC}$ ).

**Write Mode**

The 28C16A has a write cycle similar to that of a Static RAM. The write cycle is completely self-timed and initiated by a low going pulse on the  $\overline{WE}$  pin. On the falling edge of  $\overline{WE}$ , the address information is latched. On rising edge, the data and the control pins ( $\overline{CE}$  and  $\overline{OE}$ ) are latched.

**Data Polling**

The 28C16A features Data polling to signal the completion of a byte write cycle. During a write cycle, an attempted read of the last byte written results in the data complement of I/O7 (I/O0 to I/O6 are indeterminate). After completion of the write cycle, true data is available. Data polling allows a simple read/compare operation to determine the status of the chip eliminating the need for external hardware.

**Electronic Signature for Device Identification**

An extra row of 32 bytes of EEPROM memory is available to the user for device identification. By raising A9 to 12V  $\pm 0.5V$  and using address locations 7E0 to 7FF, the additional bytes can be written to or read from in the same manner as the regular memory array.

**Chip Clear**

All data may be cleared to 1's in a chip clear cycle by raising  $\overline{OE}$  to 12 volts and bringing the  $\overline{WE}$  and  $\overline{CE}$  low. This procedure clears all data, except for the extra row.

**28C16A**

MICROCHIP TECHNOLOGY INC

**SALES AND SUPPORT**

To order or to obtain information, e.g., on pricing or delivery, please use the listed part numbers, and refer to the factory or the listed sales offices.

**PART NUMBERS****28C16AF T - 15 I / P**

**Package:**

J	Cerdip
L	Plastic Leaded Chip Carrier (PLCC)
P	Plastic DIP
TS	Thin Small Outline Package (TSOP)

**Temperature Range:**

Blank	0° C to 70° C
I	-40° C to 85° C

**Access Time:**

15	150 nsec
20	200 nsec
25	250 nsec

**Shipping:**

Blank	Tube
T	Tape and Reel "L" only

**Option:**

-	= t <sub>WC</sub> = 1ms
F	= t <sub>WC</sub> = 200μs

**Device:** 28C16A 2K x 8 CMOS EEPROM