
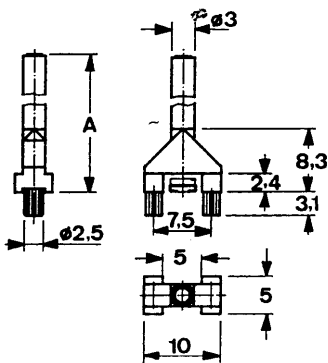



SMD-Lichtleiter System

SMD-Lightguide-System

Technische Daten	Technical Data	
Gehäusewerkstoff	Housing material	PC farblos transparent
Umgebungstemperatur	Ambient temperature	-40°C ... +85°C
Infrarot Lötung	Infrared Soldering Condition	265°C 5 sec.
Kondensations Lötung	Vapor Phase Soldering Cond.	215°C 3 min.
Montagebohrung PCB	Mounting hole PCB	Ø 2,5 - 0,05 mm

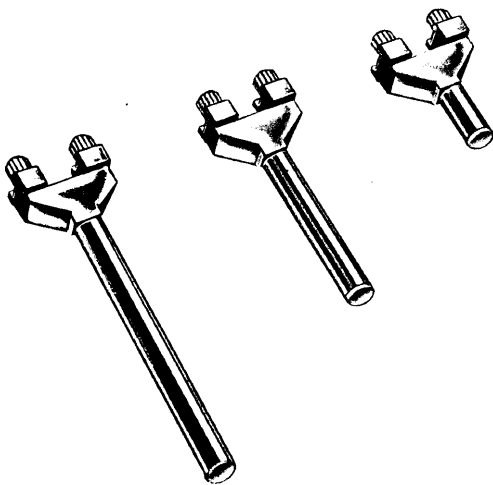

LED Type	LED Farbe	A (mm)	Art.-Nr.
L1	rot/red	15	1275.1201
L2	gelb/yellow		1275.1701
L3	grün/green		1275.1801
L1	rot/red	30	1275.1202
L2	gelb/yellow		1275.1702
L3	grün/green		1275.1802
L1	rot/red	45	1275.1203
L2	gelb/yellow		1275.1703
L3	grün/green		1275.1803

Sonderlängen auf Anfrage
 Farbige Lichtleiter auf Anfrage
 incl. LED