


## DCS-1



## 6.3 mm female terminals

## Features

- DCS-1 technology
- 8 mm pitch for sealed/unsealed application
- Auxiliary steel spring in CrNi
- High current carrying capacity (up to 50 A at +23°C)
- Protected contact springs
- Compatible with single wire sealing
- Crimp code on terminal

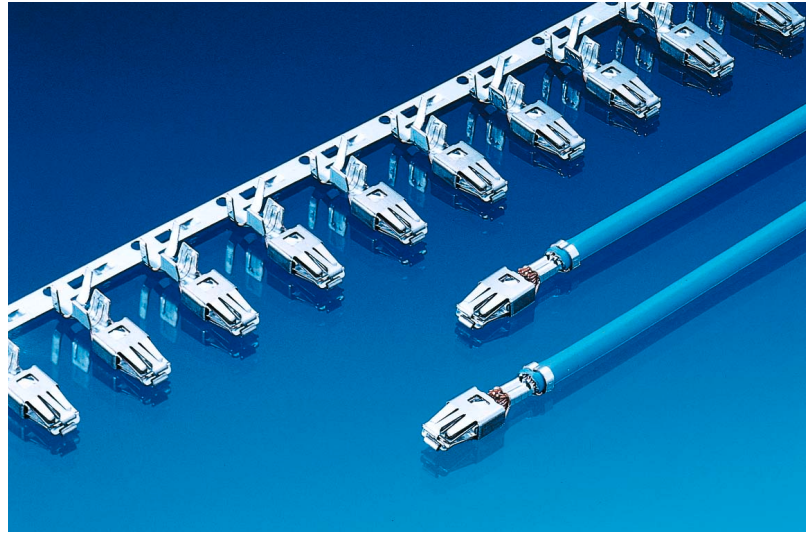

## Performance characteristics

- Contact resistance: < 3 mΩ
- Contact mating force: < 15 N
- Contact unmating force: < 12 N
- Current carrying capacity with 4.0 mm<sup>2</sup> wire:
 

at 23°C up to approx.:	50 A
at 85°C up to approx.:	32 A
at 100°C up to approx.:	26 A

\* Mated with 6.3 x 0.8 mm pin (Sn)

## Packing

- No. of terminals per reel: Consult us
- No. of reels per packing: Consult us

## Tooling

- Manual crimping tool: Consult us
- Mini applicator: Consult us

Part Numbers	Type	Wire size range (in mm <sup>2</sup> )		Insulation Ø (in mm) Max.	Material	Plating
		Min.	Max.			
6 004 00 31	Female	0.50	1.00	1.30 (FLRY wire)	CuCrSiTi/CrNi	Sn
6 004 00 41	Female	> 1.00	2.50	3.00 (FLRY wire)	CuCrSi Ti/CrNi	Sn
6 004 00 51	Female	> 2.50	4.00	3.70 (FLRY wire)	CuCrSiTi/CrNi	Sn
6 004 00 61	Female	> 4.0	5.00	4.20 (AWG wire)	CuCrSiTi/CrNi	Sn

# DCS-1

## 6.3 mm female terminals

*Dimensional characteristics*

Notes :

