


IEC Inlet Filters

Rated Voltage: 250VAC
Frequency: 50/60Hz
Temperature Range: -25°C - + 85°C

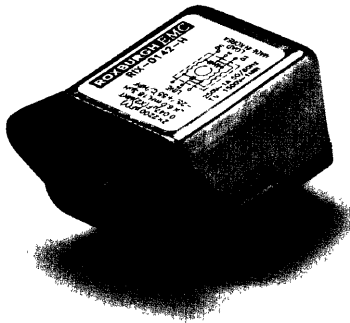




A very compact inlet filter giving good performance for both common mode and differential mode interference.

Meets overvoltage category II of IEC 664 and complies with IEC 950.


Typical applications are personal computers and computer peripherals, digital equipment, measuring instruments, monitors and display units, vending machines, games machines, printers and photocopiers.

Insertion Loss Curves


Dimensions



■ Common Mode
■ Differential Mode

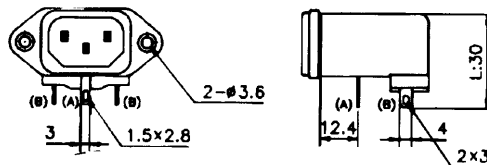

Electrical Schematic



Technical Data

Type	Current @ 40°C	Max leakage current @ 250V AC 50HZ	Terminations
RIX 0142 H	1A	0.35mA	Faston Tags
RIX 0342 H	3A	0.35mA	Faston Tags
RIX 0642 H	6A	0.35mA	Faston Tags

sales office fax: +44(0)1724 270230

ROXBURGH

