


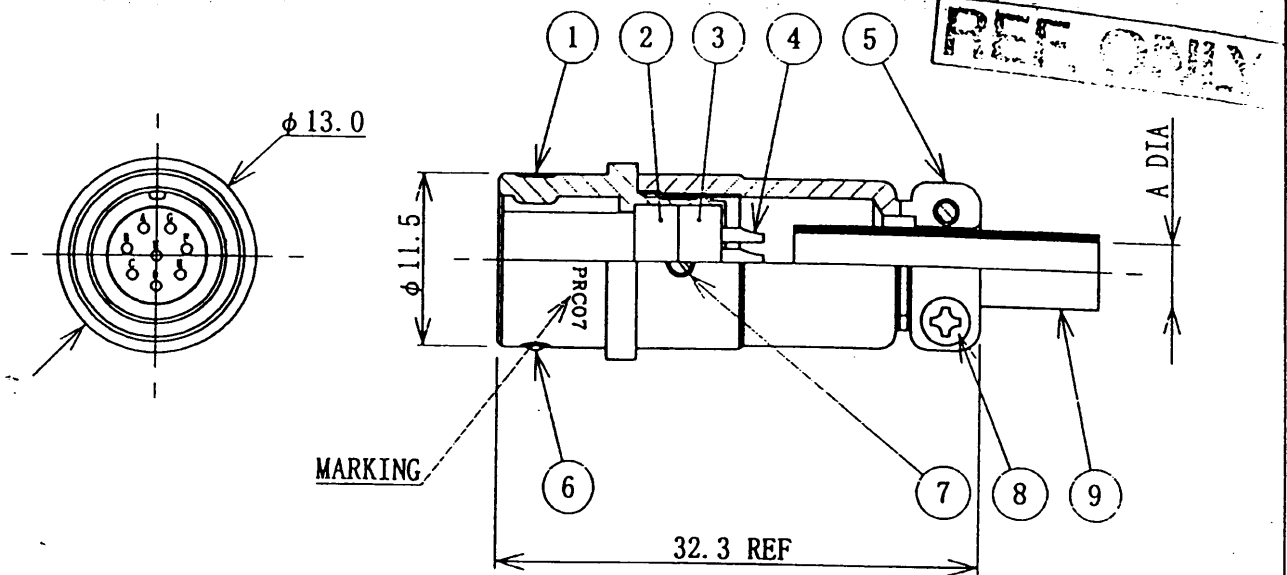

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms AT SEA LEVEL.

INSULATION RESISTANCE : 1000M Ω MIN AT 100V D.C.CONTACT RESISTANCE : 10m Ω MAX D.C. 1A MAX

2. RATING

VOLTAGE RATING : 100V rms MAX AT SEA LEVEL

CURRENT RATING : 2A MAX


3. SOLDER BUCKET SIZE : 0.5 DIA

4. A DIA : ϕ 5.2 (ϕ 4.0)

*() SLEEVE AT FITTING

5. MARKING : PRC07 T.M.W PAT

NUMBER OF CONTACT
(VIEW ON TERMINATION
SIDE OF INSULATOR)



9	SLEEVE	VINYL CHLORIDE	—	1	
8	CROSS RECESSED HEAD SCREW	BRASS	NICKEL PLATED	2	
7	SLOTTED SET SCREW	STEEL	NICKEL PLATED	1	
6	STEEL BALL	STEEL	CHROMIUM PLATED	3	
5	REAR SHELL	BRASS	NICKEL PLATED	1	
4	SOCKET CONTACT	BERYLLIUM COPPER ALLOY	GOLD FLASH OVER NICKEL PLATED	8	
3	REAR INSULATOR	PBT RESIN	—	1	
2	FRONT INSULATOR	PBT RESIN	—	1	
1	INSERT SHELL	BRASS	NICKEL PLATED	1	
品番 ITEM	部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数 量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION	尺 度 SCALE 2 / 1	TAJIMI ELECTRONICS CO., LTD.		
			単位 UNITS mm	製図 DRAWN S. SATO	DATE 11 JAN 1999	PRC07-J8F PRC07-1005 SHEET
		交差 TOLERANCES ON ANGLE . X . XX		設計 ENGR T. Ueki	DATE 11 JAN 99	
		± ± ±		検閲 CHK T. Ueki	DATE 11 JAN 99	
		仕様書番号 SPEC No		承認 APPD K. Yagi	DATE 12 JAN 99	
						変更REV 1