
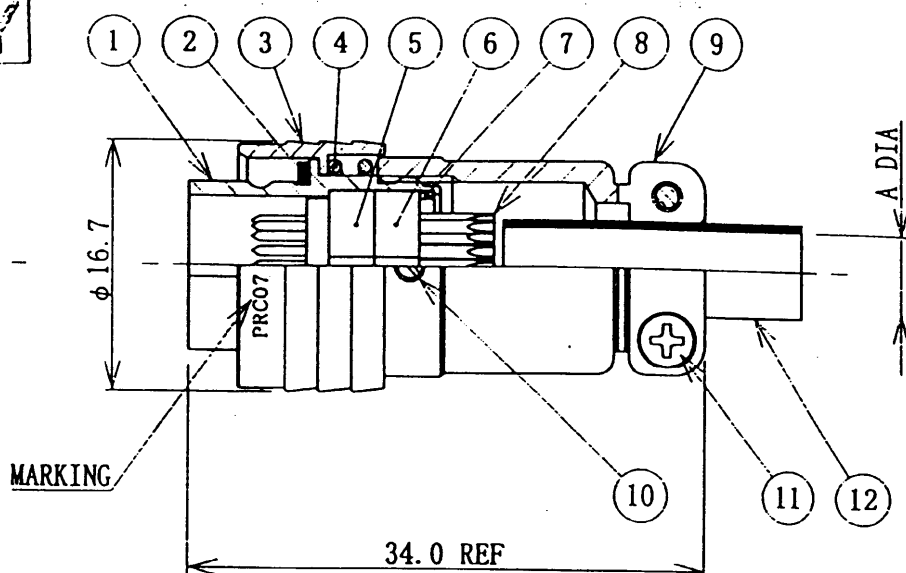


PRT ONLY

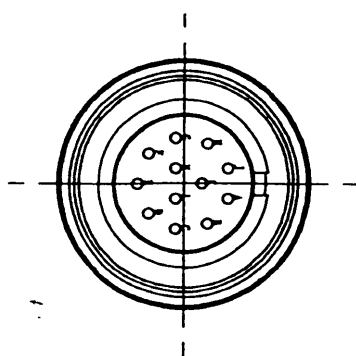

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms AT SEA LEVEL.

INSULATION RESISTANCE : 1000M Ω MIN AT 100V D.C.CONTACT RESISTANCE : 10m Ω MAX D.C. 1A MAX

2. RATING

VOLTAGE RATING : 100V rms MAX AT SEA LEVEL

CURRENT RATING : 2A MAX


3. SOLDER BUCKET SIZE : 0.5 DIA

4. A DIA : $\phi 6.2$ ($\phi 5.2$)

*() SLEEVE AT FITTING

5. MARKING : PRC07 T.M. W PAT

NUMBER OF CONTACT
(VIEW ON TERMINATION
SIDE OF INSULATOR)



1 2	SLEEVE	VINYL CHLORIDE	—	1	
1 1	CROSS RECESSED HEAD SCREW	BRASS	NICKEL PLATED	2	
1 0	SLOTTED SET SCREW	STEEL	NICKEL PLATED	1	
9	REAR SHELL	BRASS	NICKEL PLATED	1	
8	PIN CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL PLATED	1 2	
7	FERRULE	BRASS	NICKEL PLATED	1	
6	REAR INSULATOR	PBT RESIN	—	1	
5	FRONT INSULATOR	PBT RESIN	—	1	
4	SPRING	PIANO WIRE	NICKEL PLATED	1	
3	SLIDE RING	BRASS	NICKEL PLATED	1	
2	GASKET	SILICONE RUBBER	—	1	
1	INSERT SHELL	BRASS	NICKEL PLATED	1	
品番 ITEM	部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数 量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION	尺 度 SCALE 2 : 1	(T.M.W) TAJIMI ELECTRONICS CO., LTD.		
			単位 UNITS mm	製 図 DRAWN S. SATO	日 付 DATE 12. JAN. 1999	PRC07-P12M PRC07-1004
		交 差 ANGLE	TOLERANCES ON X XX	設 計 ENGR T. Waki	日 付 DATE 13. JAN. 1999	
		仕 様 番 号 SPEC No.	検 査 CHK T. Waki	日 付 DATE 13. JAN. 1999	承認 APPD K. Yagi	
SHEET					変 更 番 号 REV 1	