

RN5VD SERIES

OUTLINE

The RN5VD Series are voltage detector ICs with output delay functions and high detector threshold accuracy and ultra-low supply current by CMOS process, which can be operated at an extremely low voltage and is used, for instance, for system reset.

Each of these ICs consists of a voltage reference unit, a comparator, resistors for voltage detection, an output driver, a hysteresis circuit and an output delay generator. The detector threshold is fixed with high accuracy in the IC and requires no adjustment.

The RN5VD Series are operable by a lower voltage than that for the R×5VL Series, and can be driven by a single battery.

Two output types, Nch open drain type and CMOS type, are available. Since the package for these ICs are SOT-23-5(Mini-mold)package, high density mounting of the ICs on board is possible.

FEATURES

- Output DelayTYP. 100ms with external capacitor : 0.15μF
- Ultra-low supply currentTYP. 1.0μA (RN5VD15× : V_{DD}=3.5V)
- Broad Operating Voltage Range0.7V to 10.0V
- Detector ThresholdStepwise setting with a step of 0.1V in the range of 0.9V to 6.0V is possible. (refer to Selection Guide) .
- High accuracy detector threshold±2.5%
- Low Temperature-Drift Coefficient of Detector ThresholdTYP. ±100ppm/°C
- Two Output TypesNch Open Drain and CMOS
- Small PackageSOT-23-5(Mini-mold)

APPLICATIONS


- CPU & Logic Circuit Reset
- Battery Checker
- Window Comparator
- Wave Shaping Circuit
- Battery Back-Up Circuit
- Power Failure Detector

7744690 0003886 405


RICOH

BLOCK DIAGRAMS

• Nch Open Drain Output (RN5VD××A)

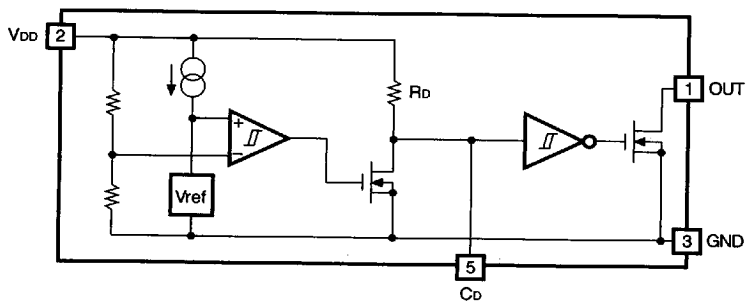

• CMOS Output (RN5VD××C)

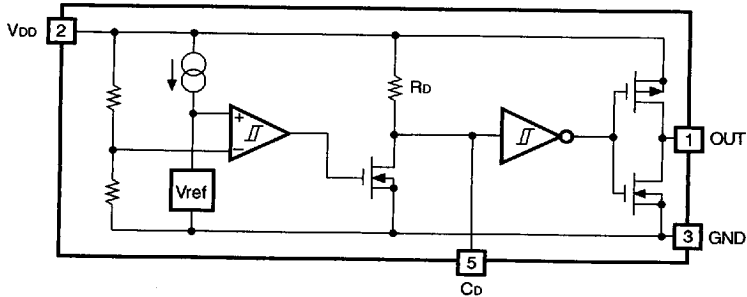

7744690 0003887 341

RICOH

SELECTION GUIDE

The detector threshold, the output type, the packing type, and the taping type of RN5VD Series can be designating at the user's request by specifying the part number as follows :

RN5VD $\overline{\text{XXXX}}$ - $\overline{\text{XX}}$ ← Part Number
 $\begin{array}{cccc} \uparrow & \uparrow & \uparrow & \uparrow \\ \text{a} & \text{b} & \text{c} & \text{d} \end{array}$


Code	Contents
a	Setting Detector Threshold ($-V_{DET}$) : Stepwise setting with a step of 0.1V in the range of 0.9V to 6.0V is possible.
b	Designation of Output Type A: Nch Open Drain C: CMOS
c	Designation of Packing Type A: Taping C: Antistatic bag for samples
d	Designation of Taping Type: Ex. SOT-23-5: TR, TL (refer to Taping Specification) "TR" is prescribed as a standard.

For example, the Product with Detector Threshold 3.5V, Output Type Nch Open Drain and Taping Type TR, is designated by Part Number RN5VD35AA-TR.

7744690 0003888 288

RICOH

PIN CONFIGURATION



PIN DESCRIPTION

Pin No.	Symbol	Description
1	OUT	Output Pin
2	VDD	Input and power source for device itself
3	GND	Ground Pin
4	NC	No Connection
5	CD	Pin for external capacitor (for setting output delay)

7744690 0003889 114

RICOH

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating		Unit
V _{DD}	Supply Voltage	12		V
V _{OUT}	Output Voltage	CNOS	V _{SS} -0.3 to V _{DD} +0.3	V
		Nch	V _{SS} -0.3 to 12	
I _{OUT}	Output Current	70		mA
P _D	Power Dissipation	150		mW
T _{opt}	Operating Temperature Range	-30 to +80		°C
T _{stg}	Storage Temperature Range	-55 to +125		°C
T _{solder}	Lead Temperature (Soldering)	260°C, 10s		

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

7744690 0003890 936

RICOH

ELECTRICAL CHARACTERISTICS

• RN5VD09A/C

T_{opt}=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold		0.878	0.900	0.922	V
V _{HYS}	Detector Threshold Hysteresis		0.027	0.045	0.063	V
I _{SS}	Supply Current	V _{DD} =0.8V		1.5	3.7	μA
		V _{DD} =2.9V		0.9	2.7	
V _{DDH}	Maximum Operating Voltage				10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C		0.55	0.70	V
		-30°C≤T _{opt} ≤80°C		0.65	0.80	
I _{OUT}	Output Current	Nch V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
		V _{DS} =0.5V, V _{DD} =0.85V	0.05	0.50		
		Pch V _{DS} =-2.1V, V _{DD} =4.5V	1.0	2.0		mA
V _{TC}	CD pin Threshold Voltage	V _{DD} =0.99V	0.297	0.495	0.693	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V	2.0	30		μA
		V _{DS} =0.5V, V _{DD} =0.85V	10.0	100.0		
R _D	Delay Resistance		0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤80°C		±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

7744690 0003891 872



• RN5VD18A/C

T_{opt}=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold		1.755	1.800	1.845	V
V _{HYS}	Detector Threshold Hysteresis		0.054	0.090	0.126	V
I _{SS}	Supply Current	V _{DD} =1.7V		2.5	5.0	μA
		V _{DD} =3.8V		1.0	3.0	
V _{DDH}	Maximum Operating Voltage				10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C -30°C≤T _{opt} ≤80°C		0.55 0.65	0.70 0.80	V
I _{OUT}	Output Current	Nch V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
		V _{DS} =0.5V, V _{DD} =1.5V	1.0	2.0		
		Pch V _{DS} =-2.1V, V _{DD} =4.5V	1.0	2.0		mA
V _{TCd}	CD pin Threshold Voltage	V _{DD} =1.98V	0.693	0.990	1.287	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V	2.0	30		μA
		V _{DS} =0.5V, V _{DD} =1.5V	200.0	800.0		
R _D	Delay Resistance		0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤80°C		±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

7744690 0003&92 709

RICOH

• RN5VD27A/C
 $T_{opt}=25^{\circ}\text{C}$

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
$-V_{DET}$	Detector Threshold		2.633	2.700	2.767	V
V_{HYS}	Detector Threshold Hysteresis		0.081	0.135	0.189	V
I_{SS}	Supply Current	$V_{DD}=2.6\text{V}$		3.5	7.0	μA
		$V_{DD}=4.7\text{V}$		1.1	3.3	
V_{DDH}	Maximum Operating Voltage				10	V
V_{DDL}	Minimum Operating Voltage (Note 1)	$T_{opt}=25^{\circ}\text{C}$ $-30^{\circ}\text{C}\leq T_{opt}\leq 80^{\circ}\text{C}$		0.55 0.65	0.70 0.80	V
I_{OUT}	Output Current	Nch $V_{DS}=0.05\text{V}, V_{DD}=0.7\text{V}$	0.01	0.05		mA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	1.0	2.0		
		Pch $V_{DS}=-2.1\text{V}, V_{DD}=4.5\text{V}$	1.0	2.0		mA
V_{TCD}	CD pin Threshold Voltage	$V_{DD}=2.97\text{V}$	1.188	1.485	1.782	V
I_{CD}	CD pin Sink Current	$V_{DS}=0.1\text{V}, V_{DD}=0.7\text{V}$	2.0	30		μA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	200.0	800.0		
R_D	Delay Resistance		0.5	1.0	2.0	$\text{M}\Omega$
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	$-30^{\circ}\text{C}\leq T_{opt}\leq 80^{\circ}\text{C}$		± 100		$\text{ppm}/^{\circ}\text{C}$

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470k Ω , and the pull-up voltage is set at 5.0V.

7744690 0003893 645

RICOH

• RN5VD36A/C

T_{opt}=25°C

Symbol	Item	Conditions		MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold			3.510	3.600	3.690	V
V _{HYS}	Detector Threshold Hysteresis			0.108	0.180	0.252	V
I _{SS}	Supply Current	V _{DD} =3.47V			4.5	9.0	μA
		V _{DD} =5.6V			1.2	3.6	
V _{DDH}	Maximum Operating Voltage					10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C -30°C≤T _{opt} ≤80°C			0.55 0.65	0.70 0.80	V
I _{OUT}	Output Current	Nch	V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
			V _{DS} =0.5V, V _{DD} =1.5V	1.0	2.0		
		Pch	V _{DS} =-2.1V, V _{DD} =4.5V	1.0	2.0		mA
V _{TC}	CD pin Threshold Voltage	V _{DD} =3.96V		1.584	1.980	2.376	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V		2.0	30		μA
		V _{DS} =0.5V, V _{DD} =1.5V		200.0	800.0		
R _D	Delay Resistance			0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤80°C			±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

7744690 0003894 581

RICOH

• RN5VD45A/C
 $T_{opt}=25^{\circ}\text{C}$

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
$-V_{DET}$	Detector Threshold		4.388	4.500	4.612	V
V_{HYS}	Detector Threshold Hysteresis		0.135	0.225	0.315	V
I_{SS}	Supply Current	$V_{DD}=4.34\text{V}$		5.5	11.0	μA
		$V_{DD}=6.5\text{V}$		1.3	3.9	
V_{DDH}	Maximum Operating Voltage				10	V
V_{DDL}	Minimum Operating Voltage (Note 1)	$T_{opt}=25^{\circ}\text{C}$ $-30^{\circ}\text{C}\leq T_{opt}\leq 80^{\circ}\text{C}$		0.55 0.65	0.70 0.80	V
I_{OUT}	Output Current	Nch $V_{DS}=0.05\text{V}, V_{DD}=0.7\text{V}$	0.01	0.05		mA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	1.0	2.0		
		Pch $V_{DS}=-2.1\text{V}, V_{DD}=8.0\text{V}$	1.5	3.0		mA
V_{TCD}	CD pin Threshold Voltage	$V_{DD}=4.95\text{V}$	1.980	2.475	2.970	V
I_{CD}	CD pin Sink Current	$V_{DS}=0.1\text{V}, V_{DD}=0.7\text{V}$	2.0	30		μA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	200.0	800.0		
R_D	Delay Resistance		0.5	1.0	2.0	$\text{M}\Omega$
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	$-30^{\circ}\text{C}\leq T_{opt}\leq 80^{\circ}\text{C}$		± 100		ppm/ $^{\circ}\text{C}$

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470k Ω , and the pull-up voltage is set at 5.0V.

7744690 0003895 418
RICOH

• RN5VD54A/C

T_{opt}=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold		5.265	5.400	5.535	V
V _{HYS}	Detector Threshold Hysteresis		0.162	0.270	0.378	V
I _{SS}	Supply Current	V _{DD} =5.2V		6.0	12.0	μA
		V _{DD} =7.4V		1.4	4.2	
V _{DDH}	Maximum Operating Voltage				10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C -30°C≤T _{opt} ≤80°C		0.55 0.65	0.70 0.80	V
I _{OUT}	Output Current	Nch V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
		V _{DS} =0.5V, V _{DD} =1.5V	1.0	2.0		
		Pch V _{DS} =-2.1V, V _{DD} =8.0V	1.5	3.0		mA
V _{TCD}	C _D pin Threshold Voltage	V _{DD} =5.94V	2.376	2.970	3.564	V
I _{CD}	C _D pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V	2.0	30		μA
		V _{DS} =0.5V, V _{DD} =1.5V	200.0	800.0		
R _D	Delay Resistance		0.5	1.0	2.0	MΩ
$\frac{\Delta -V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤80°C		±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

7744690 0003896 354

RICOH

ELECTRICAL CHARACTERISTICS BY DETECTOR THRESHOLD

• RN5VD09A/C to RN5VD39A/C

Part Number.	Detector Threshold			Hysteresis			Supply Current 1			Supply Current 2			Output Current 1			Output Current 2			
	-VDET (V)			VHYS (V)			ISS1 (μA)			ISS2 (μA)			IOUT1 (mA)			IOUT2 (mA)			
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	conditions	TYP.	MAX.	conditions	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.	
RN5VD09A/C	0.878	0.900	0.922	0.027	0.045	0.063	VDD= (-VDET) -0.10V	1.5	3.7	VDD= (-VDET) +2.0V	0.9	2.7	Nch VDS= 0.05V VDD= 0.7V	0.01	0.05	Nch VDS= 0.5V VDD= 1.5V	VDD= 0.85V	0.05	0.5
RN5VD10A/C	0.975	1.000	1.025	0.030	0.050	0.070		1.8	4.5		1.0	3.0					VDD= 1.0V	0.2	1.0
RN5VD11A/C	1.073	1.100	1.127	0.033	0.055	0.077		2.0	5.0		1.1	3.3							
RN5VD12A/C	1.170	1.200	1.230	0.036	0.060	0.084		2.5	5.0		1.2	3.6							
RN5VD13A/C	1.268	1.300	1.332	0.039	0.065	0.091		3.0	6.0		1.2	3.6							
RN5VD14A/C	1.365	1.400	1.435	0.042	0.070	0.098		3.5	7.0		1.2	3.6							
RN5VD15A/C	1.463	1.500	1.537	0.045	0.075	0.105		4.0	8.0		1.2	3.6							
RN5VD16A/C	1.560	1.600	1.640	0.048	0.080	0.112		4.5	9.0		1.2	3.6							
RN5VD17A/C	1.658	1.700	1.742	0.051	0.085	0.119		4.5	9.0		1.2	3.6							
RN5VD18A/C	1.755	1.800	1.845	0.054	0.090	0.126		4.5	9.0		1.2	3.6							
RN5VD19A/C	1.853	1.900	1.947	0.057	0.095	0.133		4.5	9.0		1.2	3.6							
RN5VD20A/C	1.950	2.000	2.050	0.060	0.100	0.140		4.5	9.0		1.2	3.6							
RN5VD21A/C	2.048	2.100	2.152	0.063	0.105	0.147		4.5	9.0		1.2	3.6							
RN5VD22A/C	2.145	2.200	2.255	0.066	0.110	0.154		4.5	9.0		1.2	3.6							
RN5VD23A/C	2.243	2.300	2.357	0.069	0.115	0.161		4.5	9.0		1.2	3.6							
RN5VD24A/C	2.340	2.400	2.460	0.072	0.120	0.168		4.5	9.0		1.2	3.6							
RN5VD25A/C	2.438	2.500	2.562	0.075	0.125	0.175		4.5	9.0		1.2	3.6							
RN5VD26A/C	2.535	2.600	2.665	0.078	0.130	0.182		4.5	9.0		1.2	3.6							
RN5VD27A/C	2.633	2.700	2.767	0.081	0.135	0.189		4.5	9.0		1.2	3.6							
RN5VD28A/C	2.730	2.800	2.870	0.084	0.140	0.196		4.5	9.0		1.2	3.6							
RN5VD29A/C	2.828	2.900	2.972	0.087	0.145	0.203		4.5	9.0		1.2	3.6							
RN5VD30A/C	2.925	3.000	3.075	0.090	0.150	0.210		4.5	9.0		1.2	3.6							
RN5VD31A/C	3.023	3.100	3.177	0.093	0.155	0.217		4.5	9.0		1.2	3.6							
RN5VD32A/C	3.120	3.200	3.280	0.096	0.160	0.224		4.5	9.0		1.2	3.6							
RN5VD33A/C	3.218	3.300	3.382	0.099	0.165	0.231		4.5	9.0		1.2	3.6							
RN5VD34A/C	3.315	3.400	3.485	0.102	0.170	0.238		4.5	9.0		1.2	3.6							
RN5VD35A/C	3.413	3.500	3.587	0.105	0.175	0.245		4.5	9.0		1.2	3.6							
RN5VD36A/C	3.510	3.600	3.690	0.108	0.180	0.252		4.5	9.0		1.2	3.6							
RN5VD37A/C	3.608	3.700	3.792	0.111	0.185	0.259		4.5	9.0		1.2	3.6							
RN5VD38A/C	3.705	3.800	3.895	0.114	0.190	0.266		4.5	9.0		1.2	3.6							
RN5VD39A/C	3.803	3.900	3.997	0.117	0.195	0.273		4.5	9.0		1.2	3.6							

(Note) Refer to the previously defined "Minimum Operating Voltage".

Condition 1 : T_{opt}=25°CCondition 2 : -30°C≤T_{opt}≤80°C

7744690 0003897 290

RICOH

T_{opt}=25°C

Output Current 3			Minimum Operating Voltage		Co Pin Threshold Voltage				Co Pin Output Current 1			Co Pin Output Current 2			Delay Resistance			Detector Threshold Tempco.						
IOUT3 (mA)			VDDL (V)		VTCD (V)				ICD1 (μA)			ICD2 (μA)			RD (MΩ)			$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$ (ppm/°C)						
conditions	MIN.	TYP.	TYP.	MAX.	conditions	MIN.	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.	MIN.	TYP.	MAX.	conditions	TYP.					
Pch VDS=-2.1V VDD=4.5V	1.0	2.0	(Note1) Condition1 0.55 Condition2 0.65	(Note1) Condition1 0.70 Condition2 0.80	VDD= (-VDET) × 1.1V	VDDX 0.3	VDDX 0.5	VDDX 0.7	VDS= 0.1V VDD= 0.7V	2.0	30	VDS= 0.5V VDD= 1.5V	VDD= 0.85V	10	100	0.5	1.0	2.0	-30°C≤ Topt ≤80°C	±100				
						VDDX 0.35	VDDX 0.5	VDDX 0.65					VDD= 1.0V	50	200									
						VDDX 0.4	VDDX 0.5	VDDX 0.6						200	800									

7744690 0003898 127

RICOH

RN5VD

• RN5VD40A/C to RN5VD60A/C

Part Number.	Detector Threshold			Hysteresis			Supply Current 1			Supply Current 2			Output Current 1			Output Current 2							
	-VDET (V)			VHYS (V)			Iss1 (μA)			Iss2 (μA)			Iout1 (mA)			Iout2 (mA)							
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	conditions	TYP.	MAX.	conditions	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.					
RN5VD40A/C	3.900	4.000	4.100	0.120	0.200	0.280	VDD= (-VDET) -0.16V	5.0	10.0	1.3	3.9	Nch	VDS= 0.05V	0.01	0.05	Nch	VDS= 1.5V	1.0	2.0				
RN5VD41A/C	3.998	4.100	4.202	0.123	0.205	0.287																	
RN5VD42A/C	4.095	4.200	4.305	0.126	0.210	0.294																	
RN5VD43A/C	4.193	4.300	4.407	0.129	0.215	0.301		5.5	11.0														
RN5VD44A/C	4.290	4.400	4.510	0.132	0.220	0.308																	
RN5VD45A/C	4.388	4.500	4.612	0.135	0.225	0.315																	
RN5VD46A/C	4.485	4.600	4.715	0.138	0.230	0.322		VDD= (-VDET) +2.0V	6.0											12.0			
RN5VD47A/C	4.583	4.700	4.817	0.141	0.235	0.329																	
RN5VD48A/C	4.680	4.800	4.920	0.144	0.240	0.336																	
RN5VD49A/C	4.778	4.900	5.022	0.147	0.245	0.343	VDD= (-VDET) -0.20V	6.5	13.0	1.4	4.2	VDS= 0.7V	VDS= 0.5V	VDS= 1.5V	1.0	2.0							
RN5VD50A/C	4.875	5.000	5.125	0.150	0.250	0.350																	
RN5VD51A/C	4.973	5.100	5.227	0.153	0.255	0.357																	
RN5VD52A/C	5.070	5.200	5.330	0.156	0.260	0.364		6.5	13.0														
RN5VD53A/C	5.168	5.300	5.432	0.159	0.265	0.371																	
RN5VD54A/C	5.265	5.400	5.535	0.162	0.270	0.378																	
RN5VD55A/C	5.363	5.500	5.637	0.165	0.275	0.385		6.5	13.0								1.4	4.2	VDS= 0.7V	VDS= 0.5V	VDS= 1.5V	1.0	2.0
RN5VD56A/C	5.460	5.600	5.740	0.168	0.280	0.392																	
RN5VD57A/C	5.558	5.700	5.842	0.171	0.285	0.399																	
RN5VD58A/C	5.655	5.800	5.945	0.174	0.290	0.406																	
RN5VD59A/C	5.753	5.900	6.047	0.177	0.295	0.413																	
RN5VD60A/C	5.850	6.000	6.150	0.180	0.300	0.420																	

(Note) Refer to the previously defined "Minimum Operating Voltage".

Condition 1 : T_{opt}=25°C

Condition 2 : -30°C≤T_{opt}≤80°C

7744690 0003899 063

RICOH

T_{opt}=25°C

Output Current 3			Minimum Operating Voltage		Co Pin Threshold Voltage				Co Pin Output Current 1			Co Pin Output Current 2			Delay Resistance			Detector Threshold Tempco.	
I _{OUT3} (mA)			V _{DDL} (V)		V _{TCD} (V)				I _{CD1} (μA)			I _{OUT1} (mA)			I _{OUT2} (mA)			$\frac{\Delta V_{DET}}{\Delta T_{opt}}$ (ppm/°C)	
conditions	MIN.	TYP.	TYP.	MAX.	conditions	MIN.	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.	conditions	TYP.	MAX.	conditions	TYP.
Pch																			
V _{DS} = -2.1V	1.5	3.0	(Note1) Condition1 0.55	(Note1) Condition1 0.70	V _{DD} = (-V _{DET}) ×1.1V	V _{DD} × 0.4	V _{DD} × 0.5	V _{DD} × 0.6V	V _{DS} = 0.1V V _{DD} = 0.7V	2.0	30	V _{DS} = 0.5V	V _{DD} = 1.5V	200	800	0.5	1.0	2.0	-30°C≤ T _{opt} ≤80°C
V _{DD} = 8.0V			Condition2 0.65	Condition2 0.80															±100

7744690 0003900 605

RICOH

OPERATION

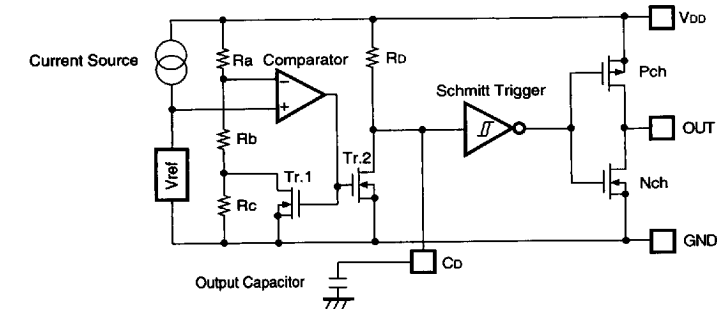


FIG. 1 Block Diagram

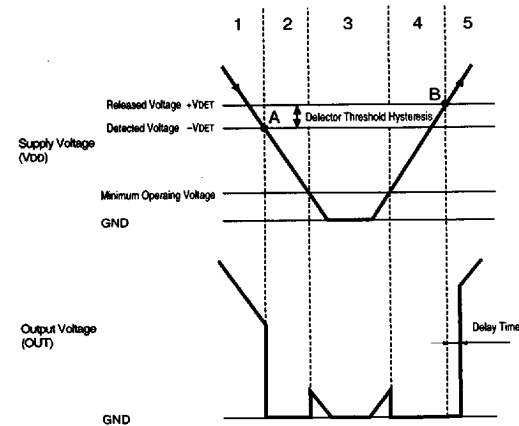


FIG. 2 Operation Diagram

Step	Step 1	Step 2	Step 3	Step 4	Step 5
Comparator (-) Pin Input Voltage	I	II	II	II	I
Comparator Output	L	H	Indefinite	H	L
Tr. 1, 2	OFF	ON	Indefinite	ON	OFF
Output Tr.	Nch	OFF	ON	Indefinite	ON
	Pch	ON	OFF	Indefinite	OFF

$$I. \frac{R_b + R_c}{R_a + R_b + R_c} \cdot V_{DD}$$


$$II. \frac{R_b}{R_a + R_b} \cdot V_{DD}$$

- Step 1. Output Voltage is equal to Pull-up Voltage.
- Step 2. When Input Voltage (V_{DD}) reaches the state of $V_{ref} \leq V_{DD} \cdot (R_b + R_c) / (R_a + R_b + R_c)$ at Point A (Detected Voltage $-V_{DET}$), the output of Comparator is reserved, so that Output Voltage becomes GND. Discharging is performed from C_o pin connected to External Capacitor. No delay time is generated.
- Step 3. Output Voltage becomes indefinite when Power Source Voltage (V_{DD}) is smaller than Minimum Operating Voltage. When the output is pulled up, V_{DD} is output.
- Step 4. Output Voltage becomes equal to GND.
- Step 5. When Input Voltage (V_{DD}) reaches the state of $V_{ref} \leq V_{DD} \cdot R_b / (R_a + R_b)$ at Point B (Released Voltage $+V_{DET}$), the output of Comparator is reversed, and the External Capacitor is charged through C_o pin, so that Output Voltage becomes equal to Pulled-up Voltage after a delay time $t_D (=0.69 \times 10^6 \times C_o)$.

7744690 0003901 541

RICOH

• Output Delay Operation

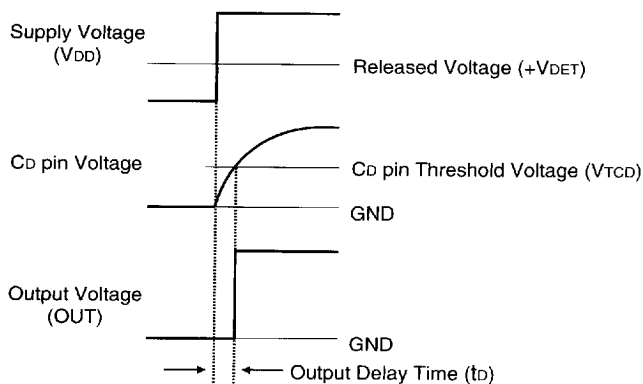

When the Supply Voltage crosses the Released Voltage (+V_{DET}) from a low value to a value higher than the Released Voltage (+V_{DET}), the CD pin Voltage starts to increase (starts to charge the external capacitor).

The Output Voltage is maintained at "L" level until the CD pin Voltage reaches to V_{TCD} (CD pin Threshold Voltage) after that the Output Voltage is reversed to "H" state.

The time period from beginning of charging capacitor to Output Voltage reversing represents the Output Delay (t_D).

• Output Delay Time

Delay time (t_D) can be set accordance with the capacitance C_D of external capacitor as below

$$t_D = 0.69 \times 10^6 \times C_D \text{ (s)}$$

7744690 0003902 488

RICOH

TEST CIRCUITS




FIG. 3 Supply Current test Circuit




FIG. 4 Detector Threshold Test Circuit




FIG. 5 Nch Driver Output Current Test Circuit

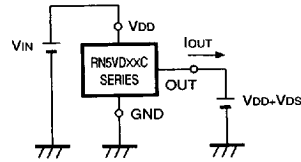


FIG. 6 Pch Driver Output Current Test Circuit

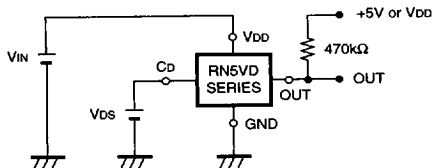


FIG. 7 Cd pin Threshold Voltage Test Circuit




FIG. 8 Cd pin Sink Current Test Circuit


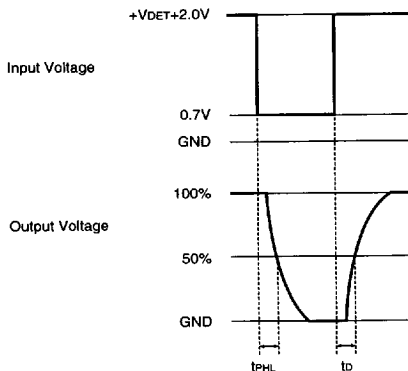


FIG. 9 Output Delay Time Test Circuit




*) at FIG.4,7,9, CMOS Output Type does not need pull-up resistor.

7744690 0003903 314



RICOH

TYPICAL CHARACTERISTICS

1) Supply Current vs. Input Voltage

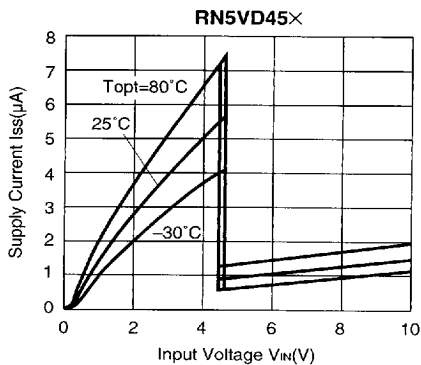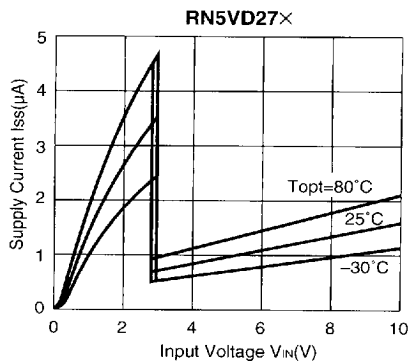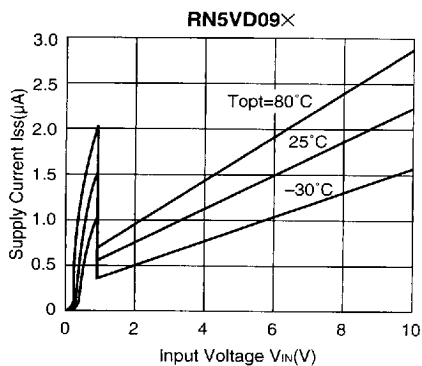


2) Detector Threshold vs. Temperature



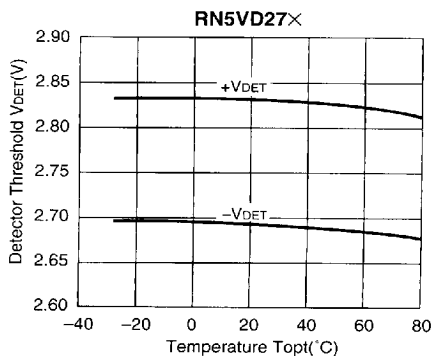
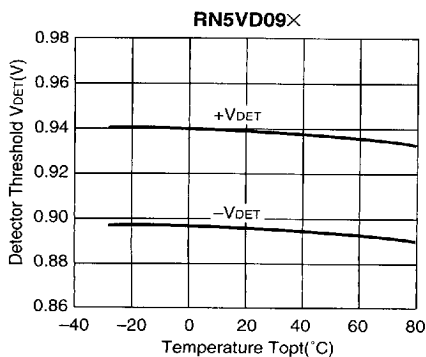


7744690 0003904 250

RICOH


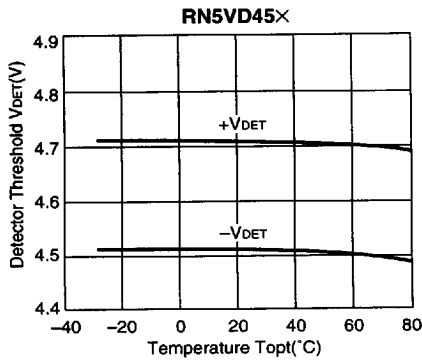


3) Output Voltage vs. Input Voltage

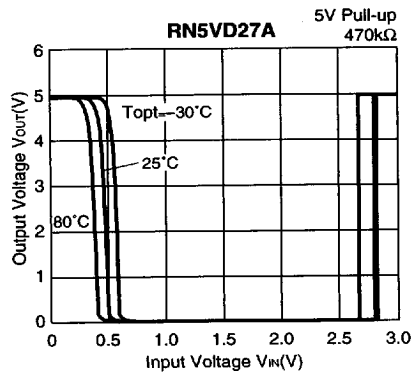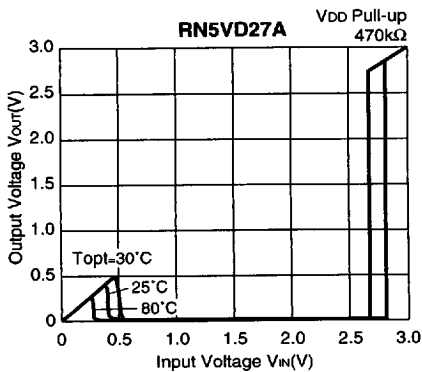
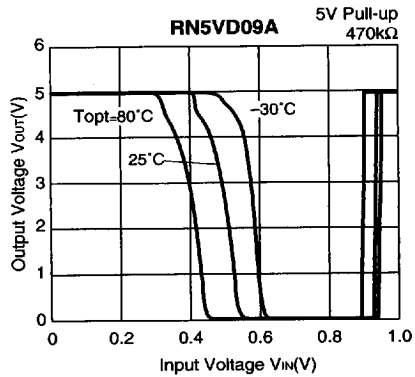
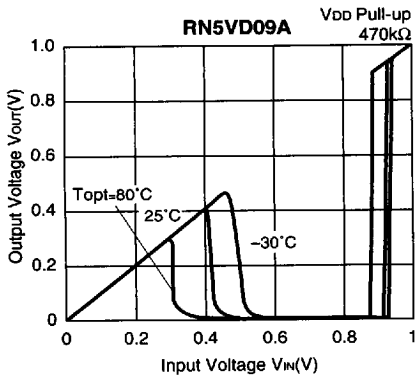


7744690 0003905 197

RICOH

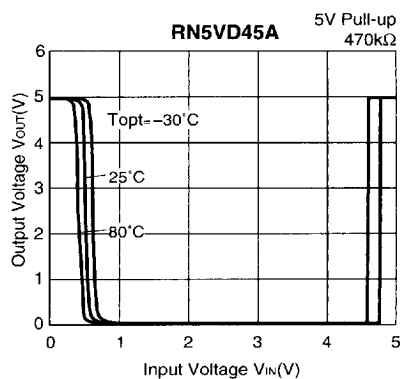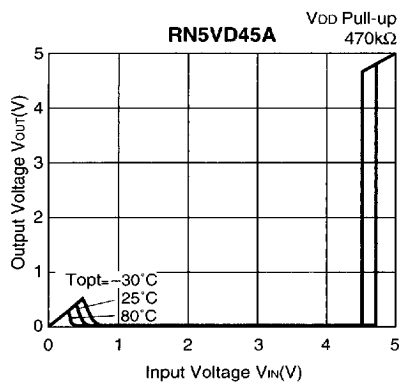




4) Nch Driver Output Current vs. V_{ds}

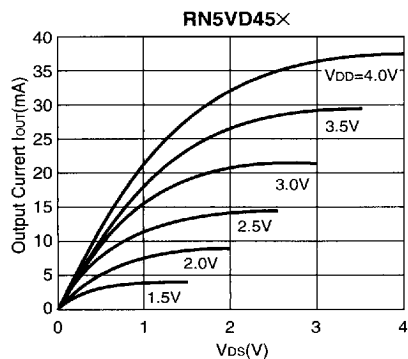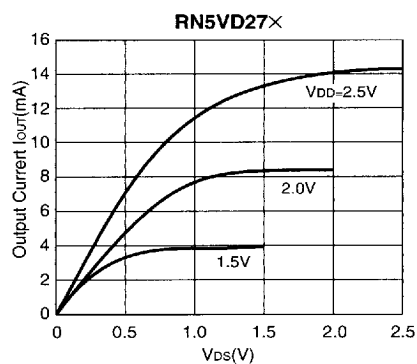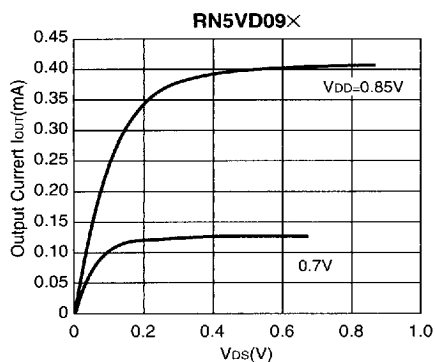



7744690 0003906 023

RICOH

5) Nch Driver Output Current vs. Input Voltage

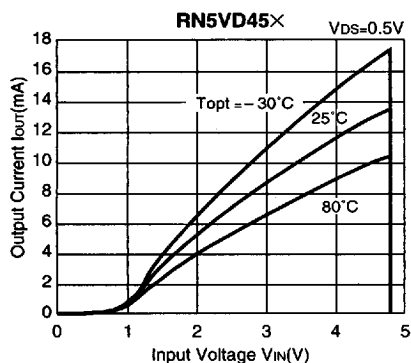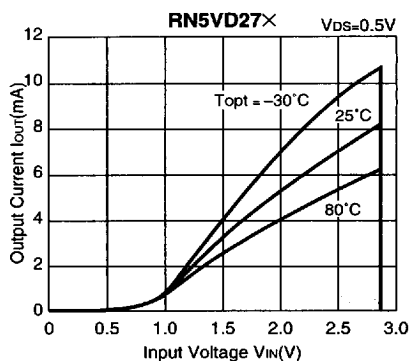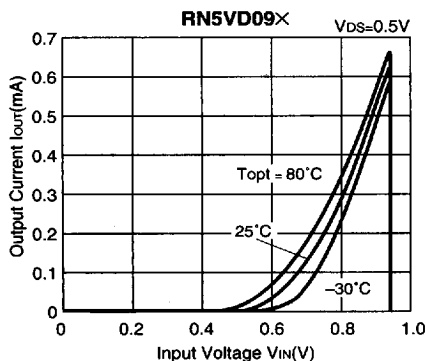


6) Pch Driver Output Current vs. Input Voltage


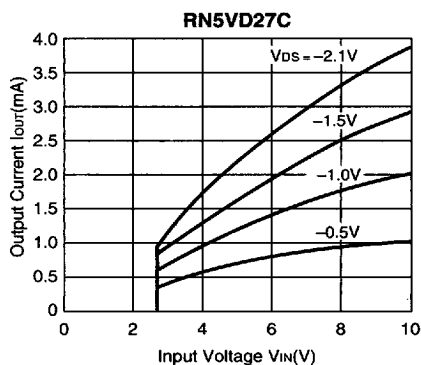
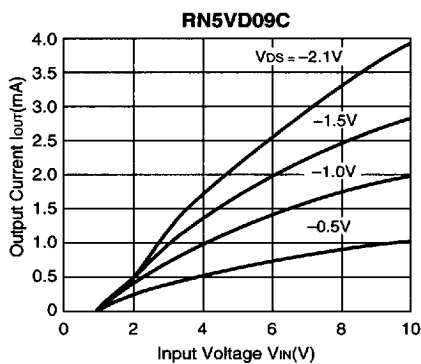


7744690 0003907 T6T

RICOH





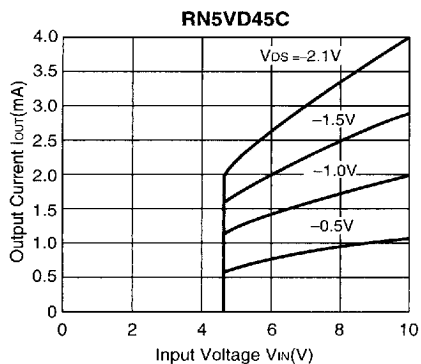



7) Co pin Threshold Voltage vs. Temperature

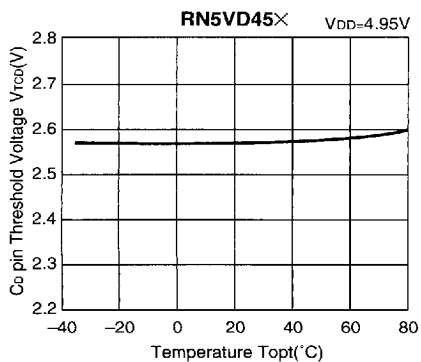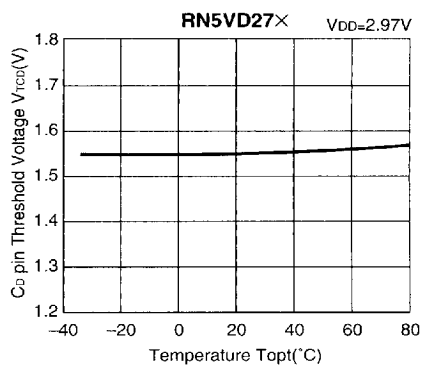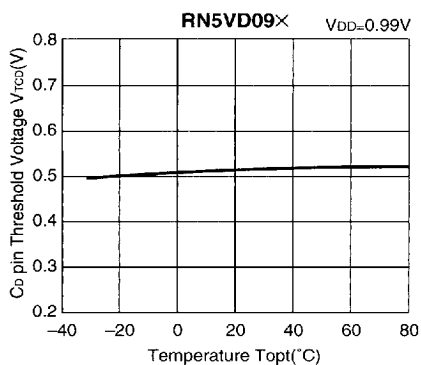




7744690 0003908 9T6

RICOH

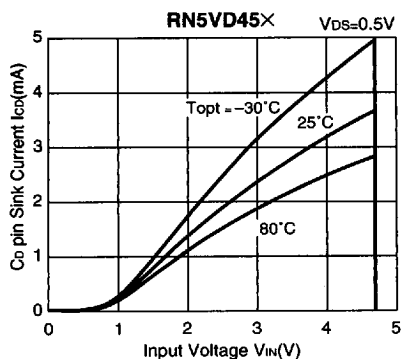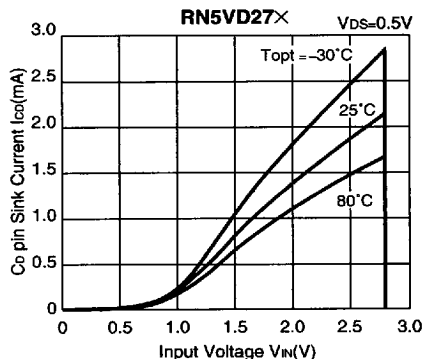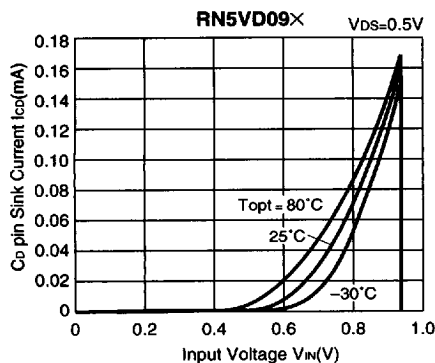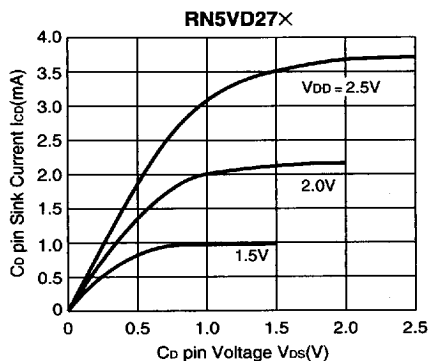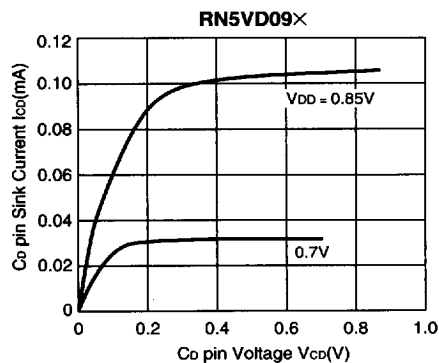
8) Cd pin Sink Current vs. Input Voltage

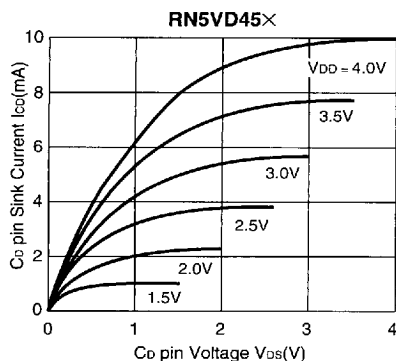9) Cd pin Sink Current vs. Cd pin Voltage

7744690 0003909 832
RICOH

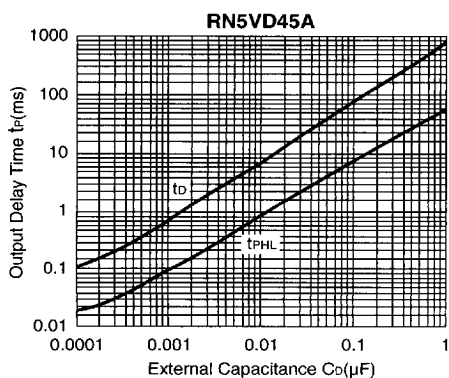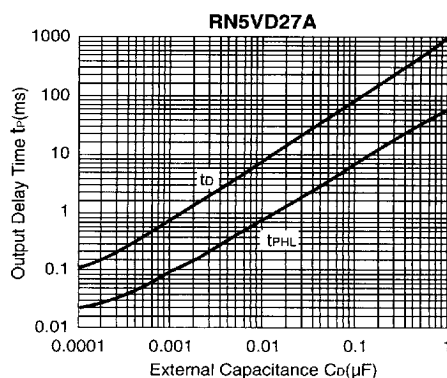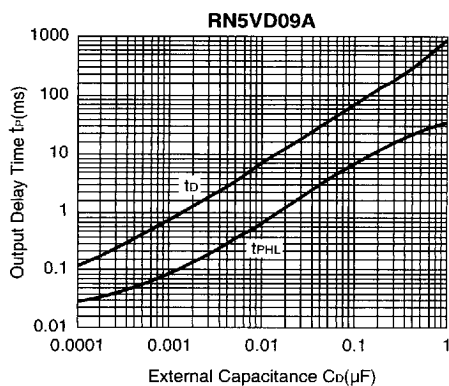

10) Output delay Time vs. External Capacitance

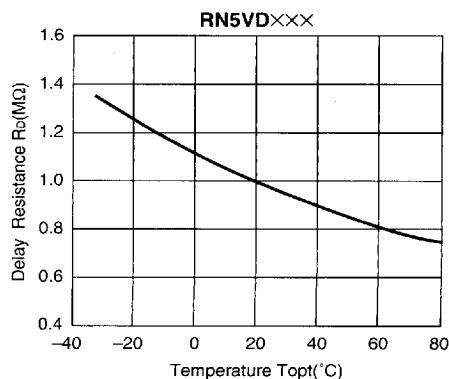

11) Delay Resistance vs. Temperature




7744690 0003910 554

RIKOH


TYPICAL APPLICATIONS

• RN5VD××A CPU Reset Circuit (Nch Open Drain Output)


(1) Input Voltage to RN5VD××A is the same as the input voltage to CPU.

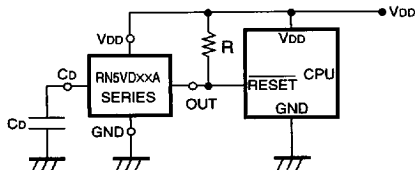


(2) Input Voltage to RN5VD××A is different from the input voltage to CPU.

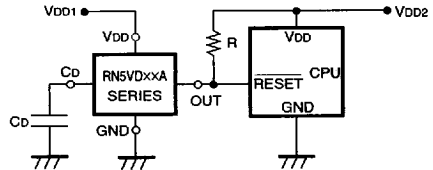

• RN5VD××C CPU Reset Circuit (CMOS Output)

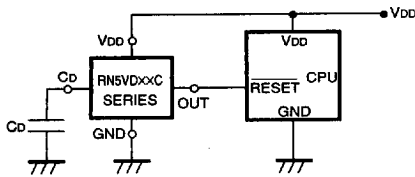



• Memory Back-up Circuit

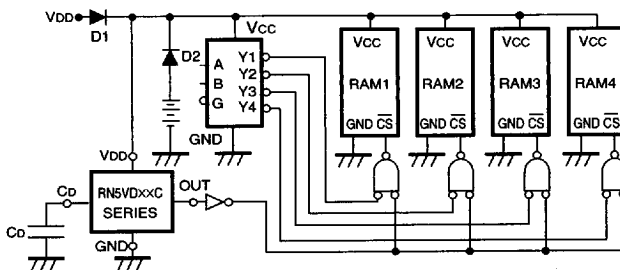

7744690 0003911 490

RICOH

• Manual Reset Circuit



APPLICATION HINTS




FIG. 10




FIG. 11

1. When RN5VDxC (CMOS Output) is used in FIG. 10, this IC may oscillate by the through-type current at the detection when impedance is connected between Power Source VDD and RN5VD VDD Pin. When RN5VDxA (Nch Open Drain Output) is used in FIG. 10, and R becomes excessively large, Detector Threshold may be varied because of the voltage drop of the supply current in the IC itself.
2. The connection as shown in FIG. 11 may cause the oscillation in both RN5VDxC (CMOS Output) and RN5VDxA (Nch Open Drain Output)

7744690 0003912 327

IRICOH