

DIOTEC ELECTRONICS CORP.
18020 Hobart Blvd., Unit B
Gardena, CA 90248 U.S.A
Tel.: (310) 767-1052 Fax: (310) 767-7958

Data Sheet No. SESA-1502-1B

15 AMP SUPER-EFFICIENT RECTIFIERS


FEATURES

- Glass Passivated for high reliability/temperature performance
- Low switching noise
- Low forward voltage drop
- Low thermal resistance
- High switching capability
- High surge capability

MECHANICAL DATA

- Case: TO-220 molded epoxy (U/L Flammability Rating 94V-0)
- Terminals: Rectangular pins w/ standoff
- Solderability: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Diode depicted on product
- Mounting Position: Any
- Weight: 0.08 Ounces (2.2 Grams)


ACTUAL SIZE OF
TO-220AC PACKAGE

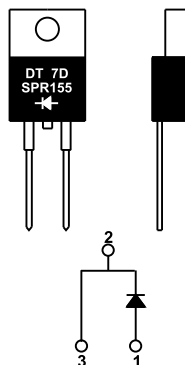

Sym	Minimum		Maximum	
	in	mm	in	mm
A			0.187	4.75
A1	0.121*	4.75*		
A2	0.14*	3.56*		
B	0.035	0.9	0.043	1.1
B1	0.09	2.3	0.102	2.6
B2	0.025*	0.64*		
B3	0.050*	1.27*		
B4			0.04	1.0
C			0.413	10.5
D	0.59	15.0	0.61	15.5
D1	0.262*	6.6*		
D2			0.16	4.0
D3	0.54	13.7	0.60	15.2
D4	0.108*	2.75*		
P	0.126*	3.2*		

* These dimensions are "Typicals".

NON - INSULATED PACKAGE

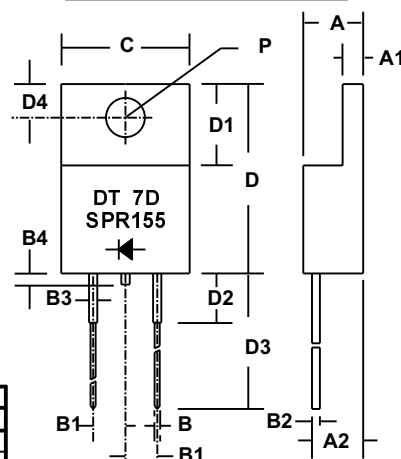

TO - 220AC

SERIES SPR150 - SPR156


MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS							UNITS
Series Number		SPR 150	SPR 151	SPR 152	SPR 153	SPR 154	SPR 155	SPR 156	
Maximum DC Blocking Voltage	V _{RM}	50	100	200	300	400	500	600	VOLTS
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	350	420	
Maximum Peak Recurrent Reverse Voltage	V _{RRM}	50	100	200	300	400	500	600	
Average Forward Rectified Current @ Tc = 110 °C	Io	15							AMPS
Peak Forward Surge Current (8.3mS single half sine wave superimposed on rated load)	IFSM	250							
Maximum Forward Voltage at 15 Amps DC	V _{FM}	0.95			1.25		1.5		VOLTS
Maximum Average DC Reverse Current @ Tc = 25 °C At Rated DC Blocking Voltage @ Tc = 100 °C	IRM	10 500							μA
Typical Thermal Resistance, Junction to Case	RθJC	1.5							°C/W
Typical Junction Capacitance (Note 1)	CJ	65							pF
Maximum Reverse Recovery Time (If=0.5A, Ir=1.0A, IRR=0.25A)	T _{RR}	35				50			nSec
Junction Operating and Storage Temperature Range	TJ, TSTG	-65 to +150							°C

NOTES: (1) Measured at 1 MHz and an applied reverse voltage of 4 volts.

437706a15



DIOTEC ELECTRONICS CORP.
18020 Hobart Blvd., Unit B
Gardena, CA 90248 U.S.A
Tel.: (310) 767-1052 Fax: (310) 767-7958

Data Sheet No. SESA-1502-2B

15 AMP SUPER EFFICIENT RECTIFIERS

RATING & CHARACTERISTIC CURVES FOR SERIES SPR150 - SPR156

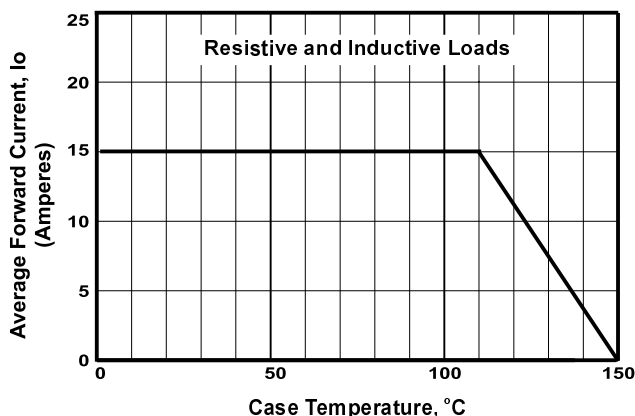


FIGURE 1. FORWARD CURRENT DERATING CURVE

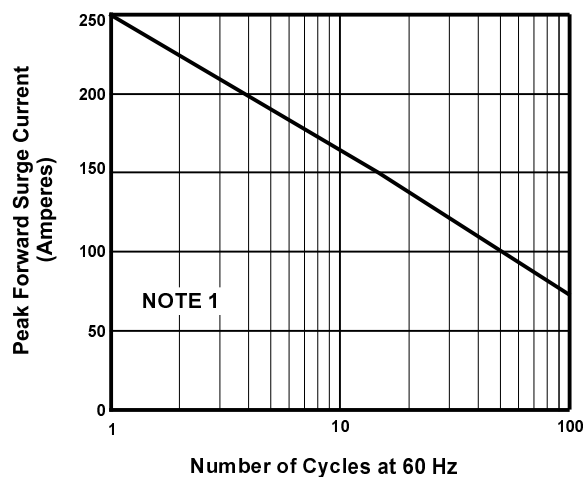


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

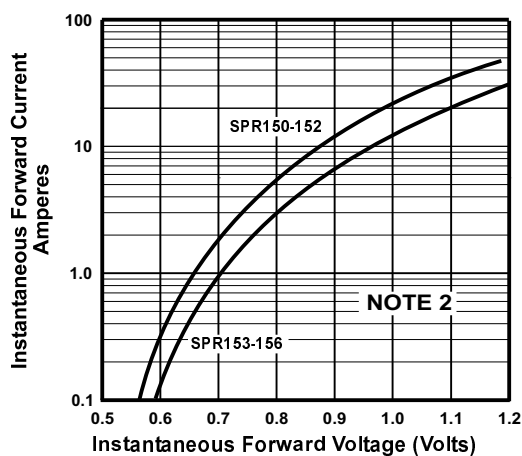


FIGURE 3. TYPICAL FORWARD CHARACTERISTICS

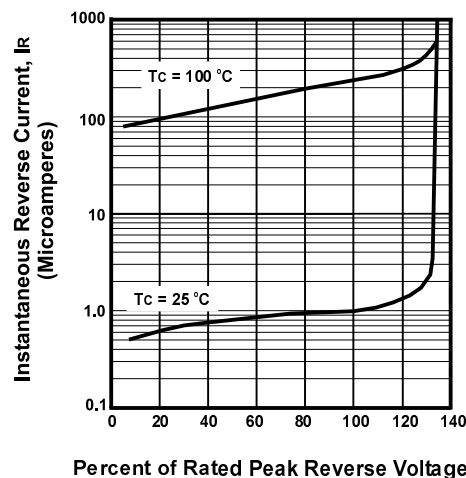


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

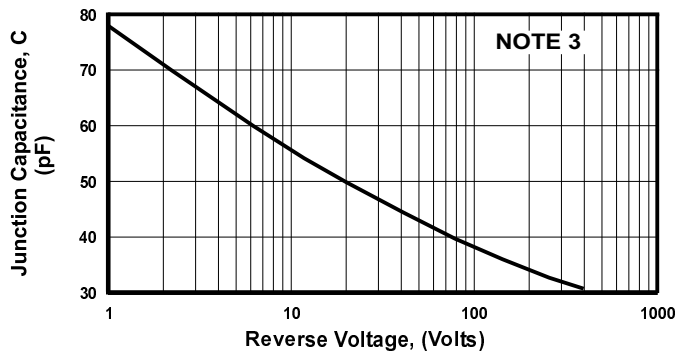


FIGURE 5. TYPICAL JUNCTION CAPACITANCE

NOTES

- (1) JEDEC Method, 8.3 mSec. Single Half Sine Wave
- (2) $T_J = 25^\circ\text{C}$, Pulse Width = 300 μSec , 1.0% Duty Cycle
- (3) $T_c = 25^\circ\text{C}$, $f = 1\text{ MHz}$, $V_{SIG} = 50\text{ mV P-P}$