

LOW CAPACITANCE STEERING DIODE ARRAY

APPLICATIONS

- ✓ High Frequency Data Lines
- ✓ RS-232 & RS-422 Interface Networks
- ✓ Ethernet: 10 Base T
- ✓ Computer I/O Ports

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kv, Contact - 8kv
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)

FEATURES


- ✓ 500 Milliwatt Continuous Power Dissipation
- ✓ ESD Protection > 40 kilovolts
- ✓ Eight (8) Individual Steering Diodes
- ✓ Designed for I/O Protection
- ✓ Working Voltage > 50 Volts
- ✓ **LOW CAPACITANCE 5pF PER DIODE**

MECHANICAL CHARACTERISTICS


- ✓ Molded Plastic 16 Pin Dual-In-Line Package
- ✓ Weight 1.2 grams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ Marking: Logo, Part Number & Pin 1 Indicated by DOT on Top of Package

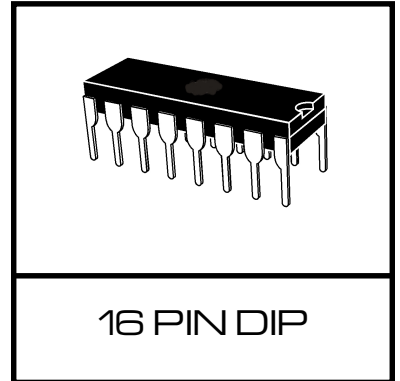

CIRCUIT DIAGRAM

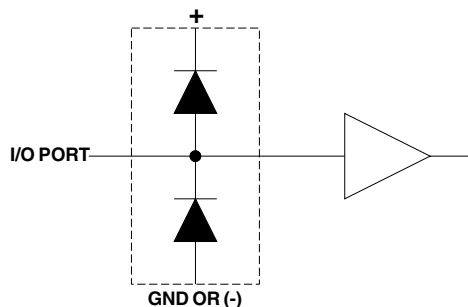

PIN CONFIGURATION

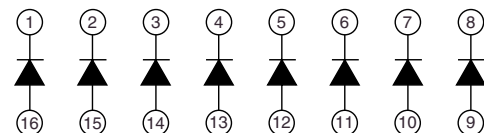


8 ISOLATED DIODE ARRAY

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Continuous Power Dissipation	P_{PK}	500	Milliwatts
Continuous Forward Current (Single Diode)	I_F	400	mA
Repetitive Peak Forward Current @ $t_p=5\mu s$, $F=50kHz$	I_{FRM}	700	mA
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified					
PART NUMBER	REPETITIVE PEAK PULSE VOLTAGE @ 10 μA V_{RRM} VOLTS	MAXIMUM REVERSE LEAKAGE CURRENT @ 40V I_R μA	FORWARD PEAK PULSE CURRENT @ 8/20 μs I_{FM} AMPS	MAXIMUM FORWARD VOLTAGE @ 100mA V_F VOLTS	MAXIMUM CAPACITANCE (Per Diode) @ 4V, 1 MHz pF
PMAD1108	50	0.1	40	1.2	5

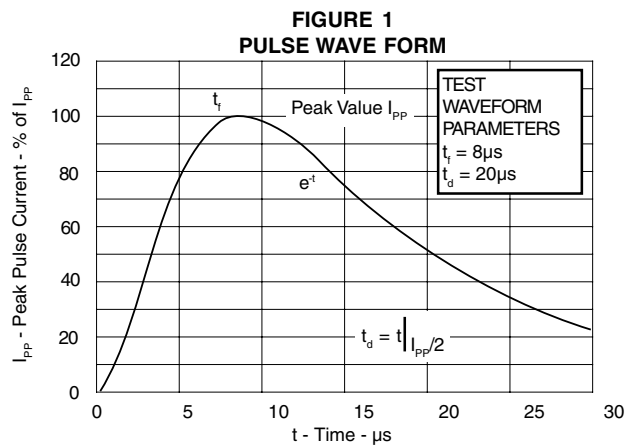

PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE

Orientation Dot (Pin #1)

12 Places

16 Places

12 Places

16 Places

16 PIN DIP

DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	19.8	-	0.780
B	6.10	6.60	0.240	0.260
C	7.37	7.87	0.290	0.310
D	0.25	0.50	0.010	0.020
E	0°	10°	0°	10°
F	0.51	-	0.020	-
G	-	5.08	-	0.200
H	3.17	-	0.125	-
I	-	1.78	-	0.070
J	0.84 TYP	0.84 TYP	0.033 TYP	0.033 TYP
K	0.38	0.53	0.015	0.021
L	2.54 TYP	2.54 TYP	0.100 TYP	0.100 TYP

NOTES:

1. Dimensions are exclusive of mold flash and metal burrs.

06003 Rev 1 - 11/01