


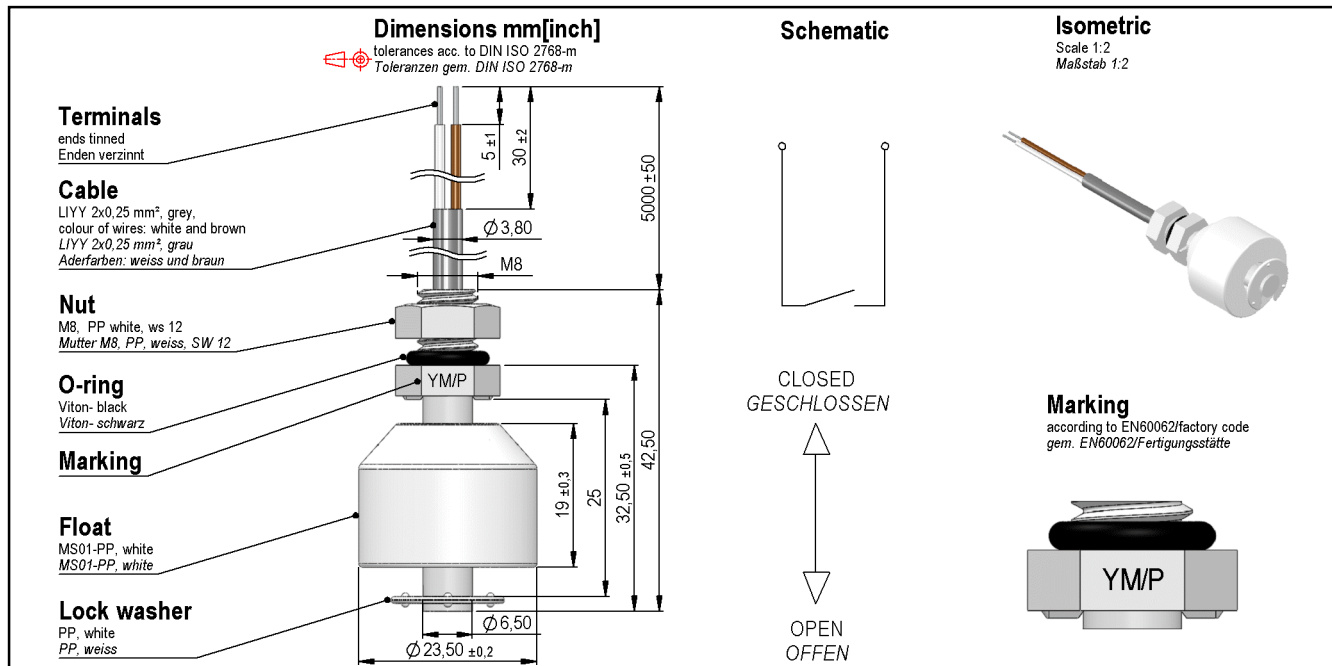

| Special Product Data | Conditions                                                           | Min | Typ         | Max | Unit |
|----------------------|----------------------------------------------------------------------|-----|-------------|-----|------|
| Contact rating       | Any DC combination of V & A<br>not to exceed their individual max.'s |     |             | 100 | W    |
| Switching voltage    | DC or Peak AC                                                        |     |             | 250 | V    |
| Carry current        | DC or Peak AC                                                        |     |             | 1   | A    |
| Switching current    | DC or Peak AC                                                        |     |             | 0,5 | A    |
| Sensor-resistance    | measured with 40% overdrive                                          |     |             | 950 | mOhm |
| Housing material     |                                                                      |     | PP          |     |      |
| Case colour          |                                                                      |     | white       |     |      |
| Sealing compound     |                                                                      |     | Polyurethan |     |      |

| Environmental data    | Conditions      | Min | Typ  | Max | Unit |
|-----------------------|-----------------|-----|------|-----|------|
| Operating temperature | cable not moved | -30 |      | 80  | °C   |
| Operating temperature | cable moved     | -5  |      | 80  | °C   |
| Storage temperature   |                 | -30 |      | 80  | °C   |
| Safety class          | DIN EN 60529    |     | IP68 |     |      |

| Cable specification | Conditions | Min | Typ         | Max | Unit |
|---------------------|------------|-----|-------------|-----|------|
| Cable type          |            |     | round cable |     |      |
| Cable material      |            |     | PVC         |     |      |
| Cross section       |            |     | 0,25 sq-mm  |     |      |

| General data      | Conditions | Min                                       | Typ | Max | Unit |
|-------------------|------------|-------------------------------------------|-----|-----|------|
| Mounting advice   |            | over 5m cable, a resistor is recommended. |     |     |      |
| Tightening torque |            |                                           |     | 0,5 | Nm   |