



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 40 - 60 Volts CURRENT 15 mAmpères

Lead free devices

CH015H-40PT

THRU

CH015H-60PT

APPLICATION

- * Ultra high speed switching

FEATURE

- * Small surface mounting type. (SC-76/SOD-323)
- * High speed. ($T_{RR}=1.0\text{mSec Typ.}$)
- * Maximum total power dissipation is 200mW.


CONSTRUCTION

- * Silicon epitaxial planar

CIRCUIT



SC-76/SOD-323

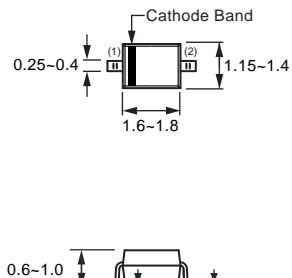

Dimensions in millimeters

SC-76/SOD-323

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	CH015H-40PT	CH015H-50PT	CH015H-60PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	40	50	60	Volts
Maximum RMS Voltage	V _{RMS}	28	35	42	Volts
Maximum DC Blocking Voltage	V _{DC}	40	50	60	Volts
Forward Continuous Current	I _{FM}		15		mAmps
Peak Forward Surge Current 10 uS single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}		2.0		Amps
Typical Thermal Resistance (Note 1)	R _{θJA}		625		°C / W
Total Capacitance (Note 2)	C _T	2.2	2.1	2.0	pF
Reverse Recovery Time at I _F =I _R =5.0mA , I _{rr} =0.5mA	T _{rr}		1.0		nS
Operating Temperature Range	T _J		-55 to +125		°C
Storage Temperature Range	T _{STG}		-55 to +125		°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	CH015H-40PT	CH015H-50PT	CH015H-60PT	UNITS
Reverse Blocking Voltage at I _R =10uA	V _{RRM}	40	50	60	Volts
Maximum Instantaneous Forward Voltage @ I _F = 1.0mA	V _F	390	400	410	mVolts
		900	950	1000	mVolts
Maximum Average Reverse Current at Rated DC Blocking Voltage	I _R	200	200	200	nAmps

NOTES : 1. Thermal Resistance (Junction to Lead) : PC Board Mounted on 0.2 X 0.2" (5 X 5mm) copper pad area.
2. Measured at 1.0 MHz and applied reverse voltage of 0 volts.

2004-06

RATING CHARACTERISTIC CURVES (CH015H-40PT THRU CH015H-60PT)

FIG. 1 - TYPICAL POWER DERATING CURVE

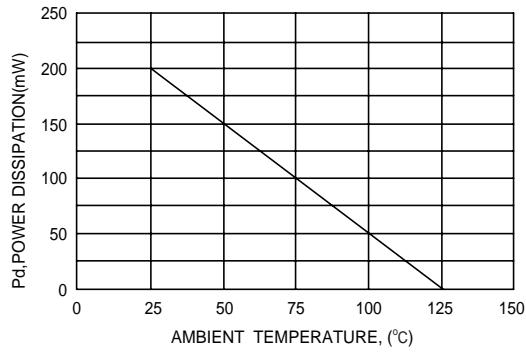


FIG. 2 - FORWARD CHARACTERISTICS

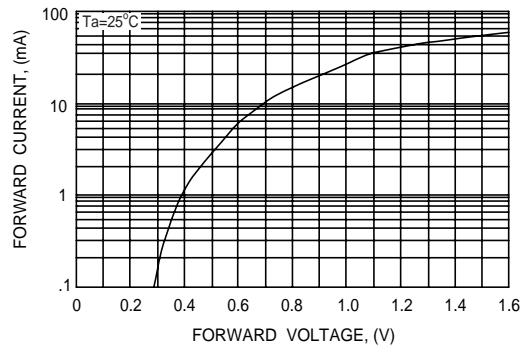


FIG. 3 - REVERSE CHARACTERISTICS

