

HA17L431/HA17L431A Series

Shunt Regulator

HITACHI

ADE-204-029E (Z)

Rev.5
Sep. 2002


Description

The HA17L431 series and the HA17L431A series are temperature-compensated variable shunt regulators. These ICs can operate at about half voltage in comparison with HA17431 series. They can be replaced for simple Zener diode and they can also be used for switching power supply secondary-side error amplification circuit.

Features


- On-chip high-precision reference voltage source : $1.240\text{ V} \pm 1.0\%$ at $T_a = 25^\circ\text{C}$ (HA17L431A)
: $1.240\text{ V} \pm 1.5\%$ at $T_a = 25^\circ\text{C}$ (HA17L431)
- Small reference voltage temperature coefficient: $30\text{ ppm}/^\circ\text{C}$ Typ
- Maximum cathode voltage: 16 V
- Maximum cathode current: 50 mA
- Minimum cathode current: $200\text{ }\mu\text{A}$ Typ
- Operating temperature range: -20 to $+85^\circ\text{C}$

Block Diagram



HA17L431/HA17L431A Series

Application Circuit Example

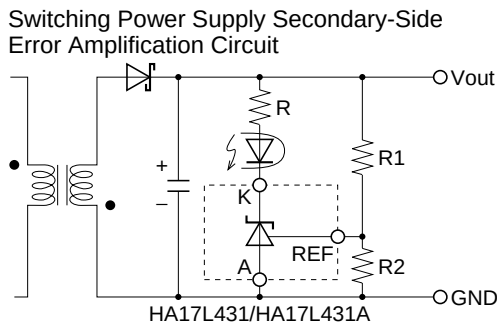


Product Lineup


Item		Version		Package	Operating Temperature Range
		A Version	Normal Version		
Reference voltage (at 25°C)	Accuracy	±1.0%	±1.5%		
	Max	1.253V	1.258V		
	Typ	1.240V	1.240V		
	Min	1.227V	1.222V		
Industrial use		HA17L431ALTP		MPAK	-20 to +85°C
		HA17L432ALTP			
		HA17L431ALP		MPAK-5	
			HA17L431LP		
			HA17L431UP	UPAK	
			HA17L432UP		
		HA17L431AP		TO-92	
			HA17L431P		

Pin Arrangement


MPAK-5
(HA17L431LP/ALP)




UPAK
(HA17L431UP)




UPAK
(HA17L432UP)




TO-92
(HA17L431P/AP)

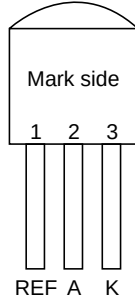

MPAK
(HA17L431ALTP)



MPAK
(HA17L432ALTP)




HA17L431/HA17L431A Series

Absolute Maximum Ratings

(Ta = 25°C)

Item	Symbol	Rated Value				Unit	Note
		HA17L431LP/ HA17L431ALP	HA17L431P/ HA17L431AP	HA17L431UP/ HA17L432UP	HA17L431ALTP/ HA17L432ALTP		
Cathode voltage	V _{KA}	16	16	16	16	V	1
Continuous cathode current	I _K	−30 to +50	−30 to +50	−30 to +50	−30 to +50	mA	
Reference input current	I _{ref}	−0.05 to +5	−0.05 to +5	−0.05 to +5	−0.05 to +5	mA	
Power dissipation	P _T	150	500	800	150	mW	2
Operating temperature	Topr	−20 to +85	−20 to +85	−20 to +85	−20 to +85	°C	
Storage temperature	Tstg	−55 to +150	−55 to +150	−55 to +150	−55 to +150	°C	

- Notes: 1. The anode pin is used as the reference for voltage values.
2. These values apply when Ta ≤ 25°C. If Ta ≥ 25°C, derate by below figure.

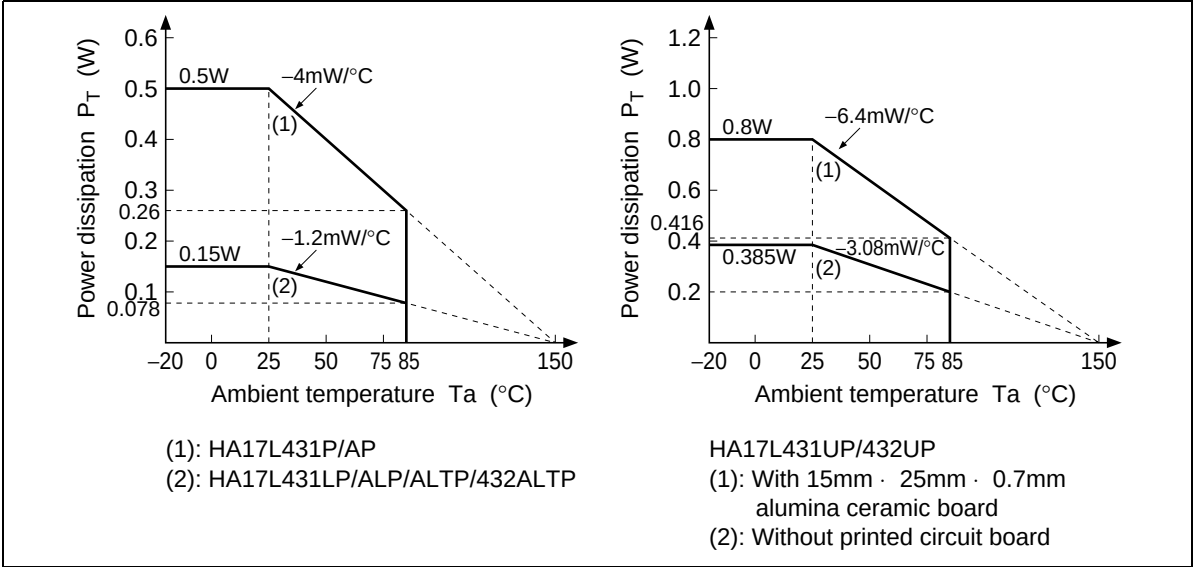


Electrical Characteristics

(Ta = 25°C, I_k = 10 mA)

Item	Symbol	Min	Typ	Max	Unit	Test Condition	Remark
Reference voltage	Vref	1.222	1.240	1.258	V	V _{KA} = Vref	HA17L431
		1.227	1.240	1.253			HA17L431A
Reference voltage deviation	Vref(dev)	—	5	—	mV	V _{KA} = Vref, Ta = -20°C to +85°C	*1
Reference voltage temperature coefficient	ΔVref/ΔTa	—	±30	—	ppm/°C	V _{KA} = Vref, 0°C to 50°C gradient	
Reference voltage regulation	ΔVref/ΔV _{KA}	—	1.0	2.0	mV/V	V _{KA} = Vref to 16V	
Reference input current	Iref	—	2	6	μA	R1 = 10 kΩ, R2 = ∞	
Reference current temperature deviation	Iref(dev)	—	0.5	—	μA	R1 = 10 kΩ, R2 = ∞, Ta = -20°C to +85°C	
Minimum cathode current	Imin	—	0.2	1.0	mA	V _{KA} = Vref	*2
Off cathode current	Ioff	—	0.001	1.0	μA	V _{KA} = 16 V, Vref = 0 V	
Dynamic impedance	Z _{KA}	—	0.2	0.5	Ω	V _{KA} = Vref, I _k = 1 mA to 50 mA	

Notes: 1. Vref(dev) = (Vref maximum value at Ta = -20°C to +85°C) – (Vref minimum value at Ta = -20°C to +85°C)

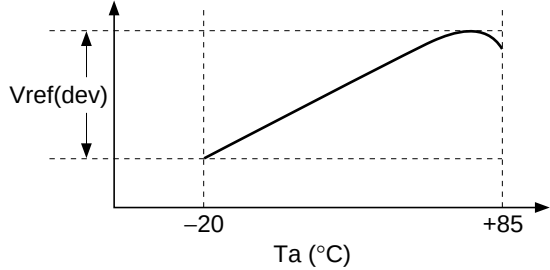


2. Definition of minimum cathode current.
Imin is the cathode current value at which Vref = Vref_(I_k = 10 mA) – 15 mV.

HA17L431/HA17L431A Series

MPAK-5(5-pin), MPAK(3-pin) and UPAK Marking Patterns

The marking patterns shown below are used on MPAK-5, MPAK and UPAK products. Note that the product code and mark pattern are different. The pattern is laser-printed.

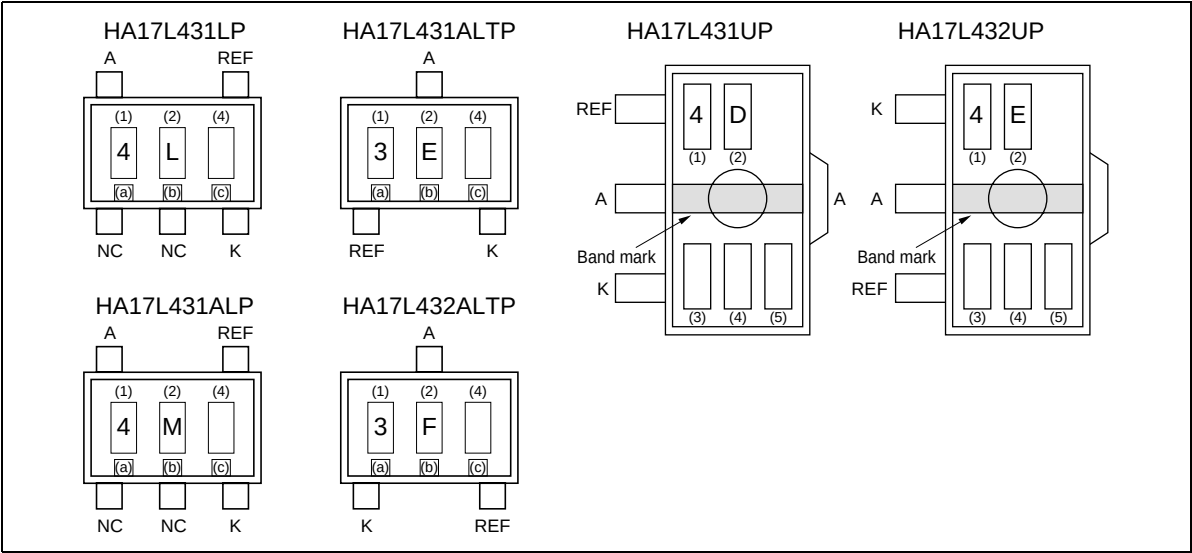

Notes: 1. Boxes (1) to (5) in the figures show the position of the letters or numerals, and are not actually marked on the package.

2. The letters (1) and (2) show the product specific mark pattern.

Product	(1)	(2)
HA17L431LP	4	L
HA17L431ALP	4	M
HA17L431ALTP	3	E
HA17L432ALTP	3	F
HA17L431UP	4	D
HA17L432UP	4	E

3. The letter (3) shows the production year code (the last digit of the year) for UPAK products.

4. The bars (a), (b) and (c) show a production year code for MPAK-5 and MPAK products as shown below. After 2010 the code is repeated every 8 years.

Year	2002	2003	2004	2005	2006	2007	2008	2009
(a)	None	None	None	Bar	Bar	Bar	Bar	None
(b)	None	Bar	Bar	None	None	Bar	Bar	None
(c)	Bar	None	Bar	None	Bar	None	Bar	None



5. The letter (4) shows the production month code (see table below).

Production month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Marked code	A	B	C	D	E	F	G	H	J	K	L	M


6. The letter (5) shows manufacturing code. For UPAK products.

Characteristic Curves


Temperature Characteristics of Reference Voltage

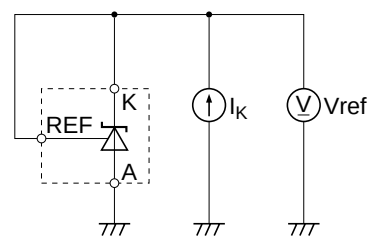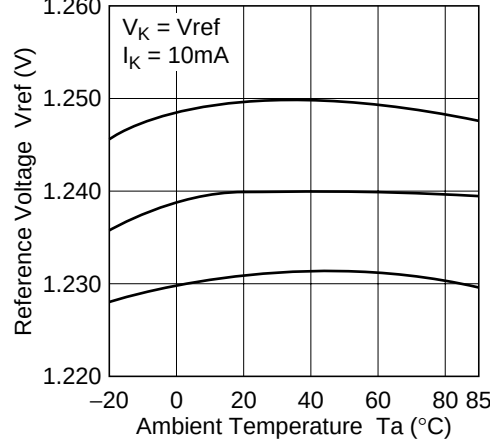



Catode Current vs. Catode Voltage1

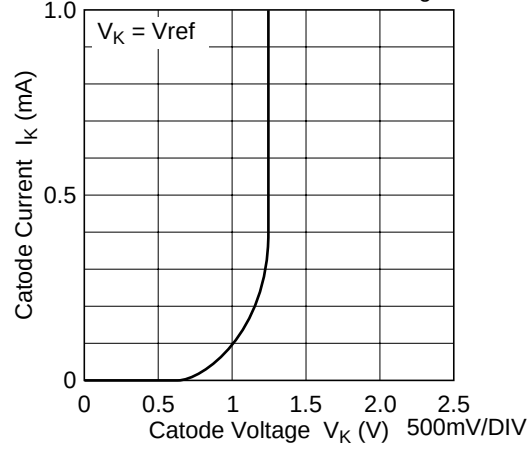

Catode Current vs. Catode Voltage2

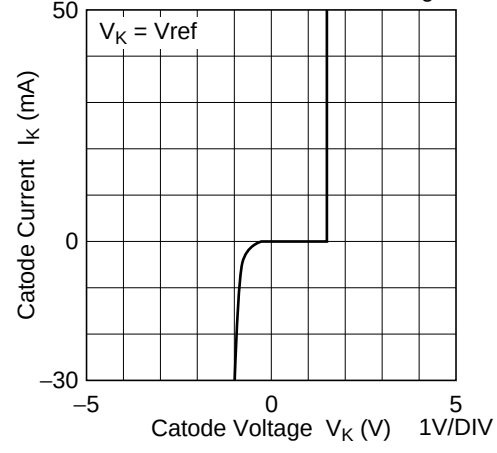

Open Loop Voltage Gain, Phase vs. Frequency Characteristics

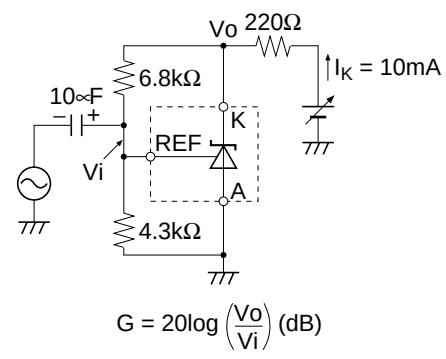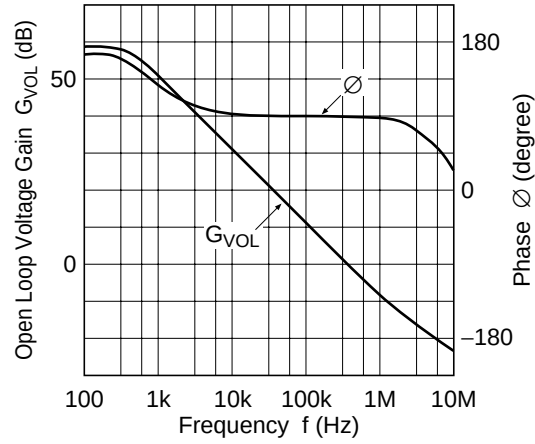

Noise Recovery Characteristics of HA17L431A and HA17L431

The HA17L431A bettered V_{KA} and V_{ref} recovery time against the HA17L431 when it was inputted noise.

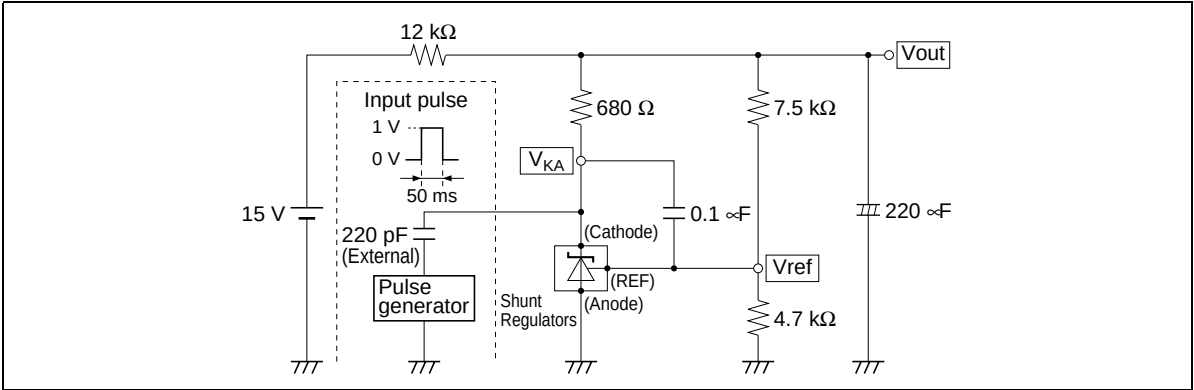


Figure 1 Noise Response Characteristics Measurement Circuit


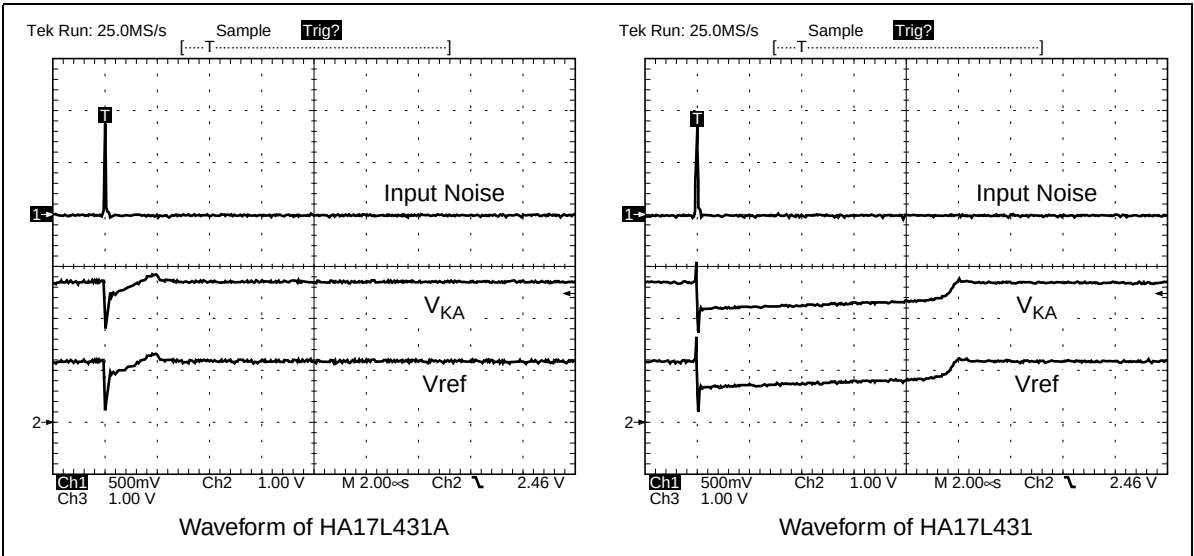


Figure 2 Noise Recovery Characteristics


Package Dimension

As of January, 2002
Unit: mm

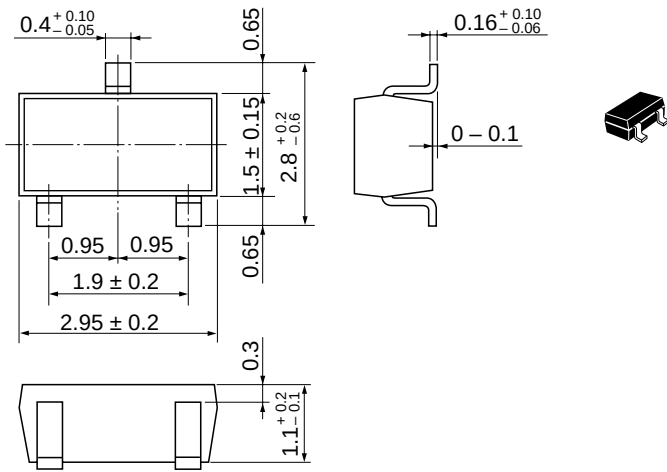


Hitachi Code	MPAK
JEDEC	—
JEITA	Conforms
Mass (reference value)	0.011 g

As of January, 2002
Unit: mm

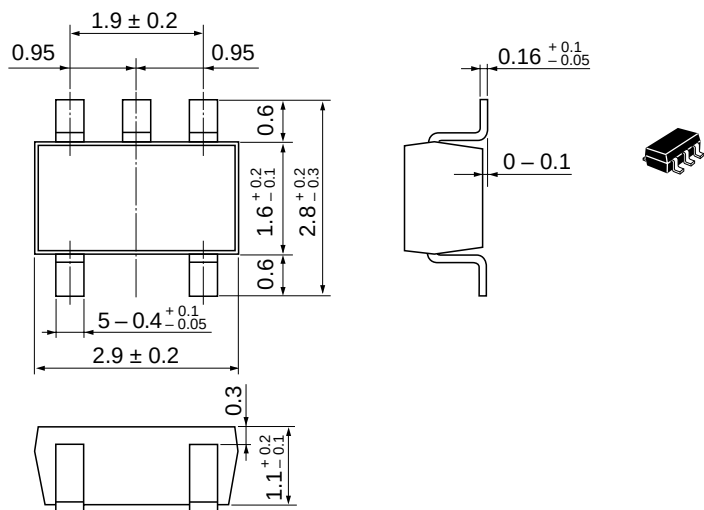


Hitachi Code	MPAK-5
JEDEC	—
JEITA	—
Mass (reference value)	0.015 g

As of January, 2002
Unit: mm

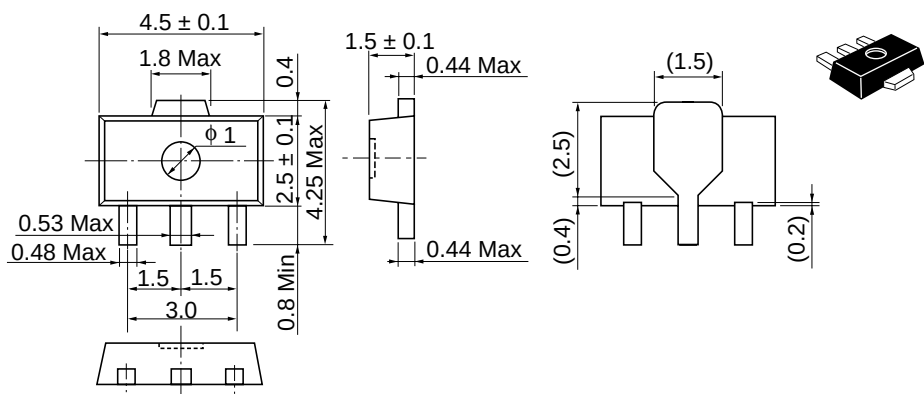

Hitachi Code	UPAK
JEDEC	—
JEITA	Conforms
Mass (reference value)	0.050 g

As of January, 2002
Unit: mm

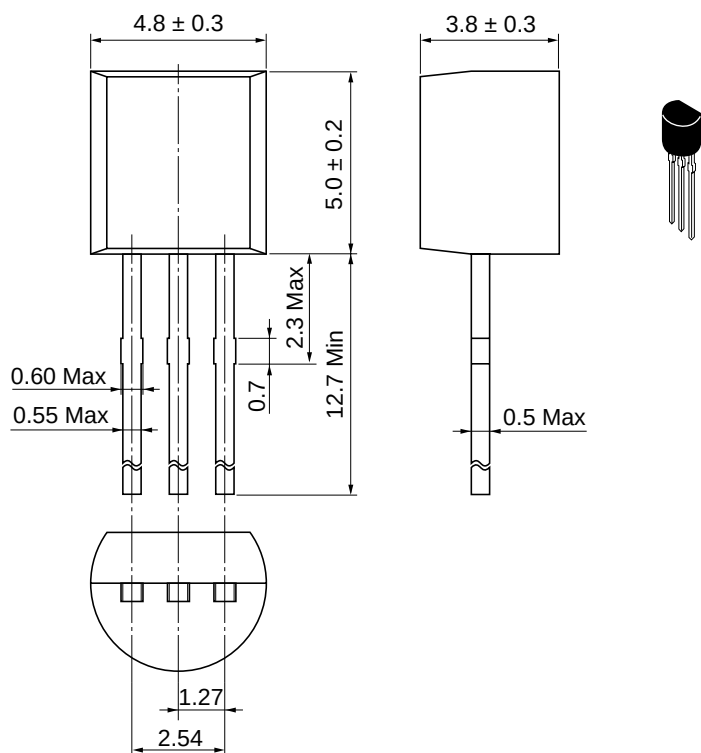

Hitachi Code	TO-92 (1)
JEDEC	Conforms
JEITA	Conforms
Mass (reference value)	0.25 g

Disclaimer

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

Sales Offices

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL <http://www.hitachisemiconductor.com/>

For further information write to:

Hitachi Semiconductor (America) Inc.
179 East Tasman Drive
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1> (408) 433-0223

Hitachi Europe Ltd.
Electronic Components Group
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 585200

Hitachi Europe GmbH
Electronic Components Group
Dornacher Straße 3
D-85622 Feldkirchen
Postfach 201, D-85619 Feldkirchen
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd.
Hitachi Tower
16 Collyer Quay #20-00
Singapore 049318
Tel: <65>-6538-6533/6538-8577
Fax: <65>-6538-6933/6538-3877
URL: <http://semiconductor.hitachi.com.sg>

Hitachi Asia Ltd.
(Taipei Branch Office)
4/F, No. 167, Tun Hwa North Road
Hung-Kuo Building
Taipei (105), Taiwan
Tel: <886>-(2)-2718-3666
Fax: <886>-(2)-2718-8180
Telex: 23222 HAS-TP
URL: <http://www.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon Hong Kong
Tel: <852>-2735-9218
Fax: <852>-2730-0281
URL: <http://semiconductor.hitachi.com.hk>

Copyright © Hitachi, Ltd., 2002. All rights reserved. Printed in Japan.
Colophon 6.0