


KS926S2 (5A)

(200V / 5A)

LOW LOSS SUPER HIGH SPEED RECTIFIER

■ Outline drawings, mm



JEDEC

EIAJ


■ Features

- Surface-mount device
- Low VF
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed power switching

■ Connection diagram



■ Maximum ratings and characteristics







● Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V _{RRM}		200	V
Average output current	I _O	duty=1/2, T _c =106°C Square wave	5	A
Surge current	I _{FSM}	Sine wave 10ms	70	A
Operating junction temperature	T _j		-40 to +150	°C
Storage temperature	T _{stg}		-40 to +150	°C

● Electrical characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V _{FM}	I _{FM} =5A	0.95	V
Reverse current	I _{RRM}	V _R =V _{RRM}	100	µA
Reverse recovery time	t _{rr}	I _f =0.1A, I _R =0.2A	35	ns
Thermal resistance	R _{th(j-c)}	Junction to case	10	°C/W

■ Characteristics

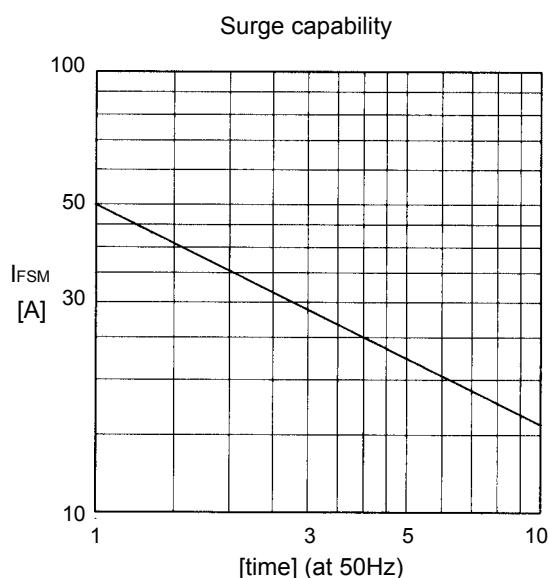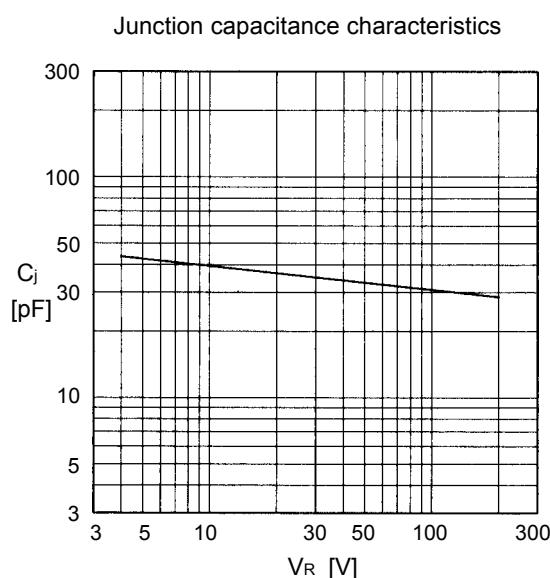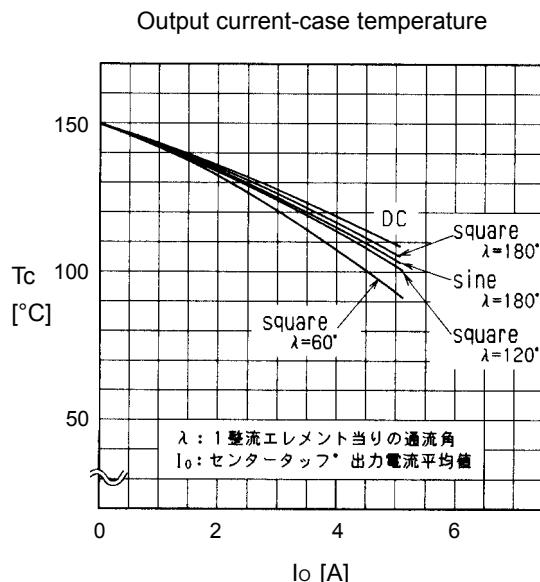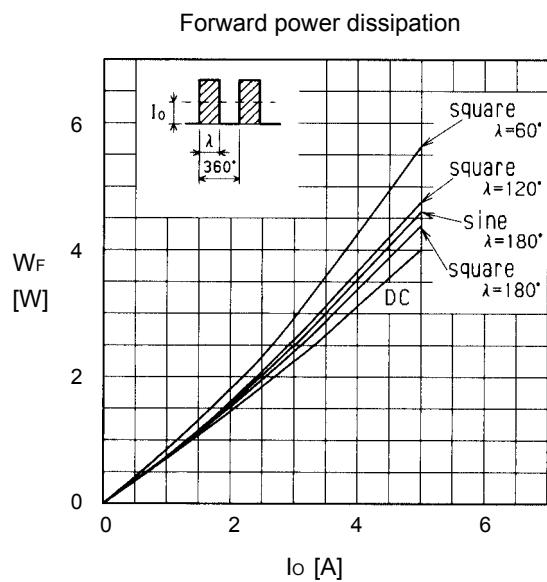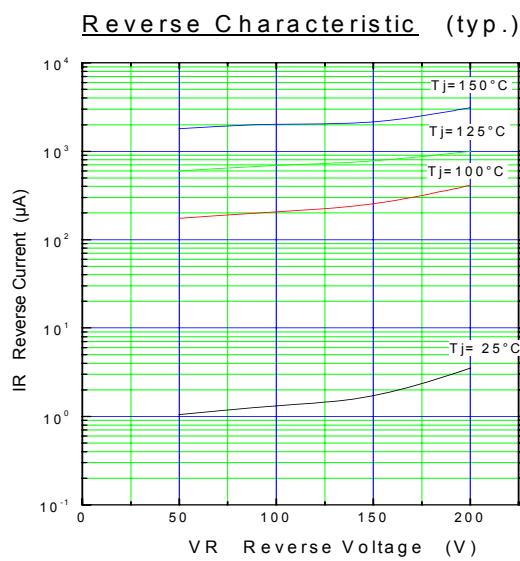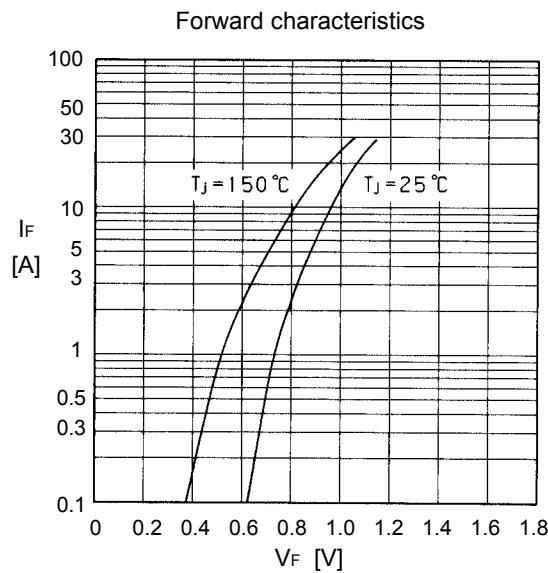

Transient thermal impedance

