

**REVISIONS**

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Changes in accordance with NOR 5962-R139-95.	95-05-11	K. A. Cottongim
B	Corrected figure 1 to move the side view of case outlines X and Z to the right side of the top view for the correct orientation. Figure 1; removed the min limit for the D dimension of 2.880 inches (73.15 mm) for the case outline Z. -sld	98-07-22	K. A. Cottongim
C	Add device type 02, class K, and radiation hardness assurance (RHA) requirements for levels L and R.	00-06-22	Raymond Monnin

REV																				
SHEET																				
REV																				
SHEET																				


REV STATUS	REV	C	C	C	C	C	C	C	C	C	C	C	C	C	C		
OF SHEETS	SHEET	1	2	3	4	5	6	7	8	9	10	11	12				

PMIC N/A	PREPARED BY Steve L. Duncan	<b>DEFENSE SUPPLY CENTER COLUMBUS POST OFFICE BOX 3990 COLUMBUS, OHIO 43216-5000</b>													
<b>STANDARD MICROCIRCUIT DRAWING</b>	CHECKED BY Michael C. Jones														
	APPROVED BY Kendall A. Cottongim	<b>MICROCIRCUIT, HYBRID, LINEAR, 15-VOLT, SINGLE CHANNEL, DC-DC CONVERTER</b>													
	DRAWING APPROVAL DATE 94-05-13														
	REVISION LEVEL <b>C</b>		SIZE A	CAGE CODE <b>67268</b>	<b>5962-93070</b>										
	SHEET 1 OF 12														

1. SCOPE

1.1 Scope. This drawing documents five product assurance classes, class D (lowest reliability), class E, (exceptions), class G (lowered high reliability), class H (high reliability), and class K, (highest reliability) and a choice of case outlines and lead finishes which are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of radiation hardness assurance levels are reflected in the PIN.

1.2 PIN. The PIN shall be as shown in the following example:

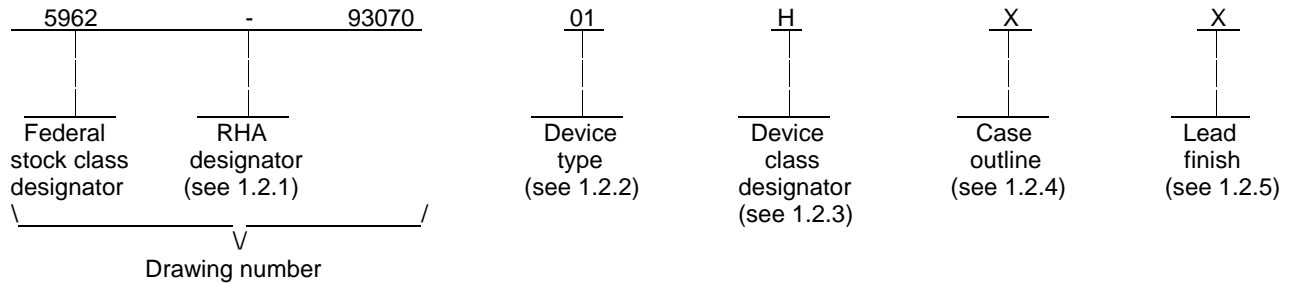

1.2.1 Radiation hardness assurance (RHA) designator. Device classes H and K RHA marked devices shall meet the MIL-PRF-38534 specified RHA levels and shall be marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device. Only the RHA levels specified herein are available. See 4.3.5.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	MTR2815S/883, MTR2815SF/883	DC-DC converter, 30 W, 15 V output
02	SMTR2815S, SMTR2815SF	DC-DC converter, 30 W, 15 V output

1.2.3 Device class designator. This device class designator shall be a single letter identifying the product assurance level as follows:

<u>Device class</u>	<u>Device performance documentation</u>
D, E, G, H, or K	Certification and qualification to MIL-PRF-38534

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
X	See figure 1	10	Dual-in-line
Z	See figure 1	10	Flange mount

1.2.5 Lead finish. The lead finish shall be as specified in MIL-PRF-38534.

1.3 Absolute maximum ratings. 1/

Input voltage range .....	-0.5 V dc to +50 V dc
Power dissipation (P <sub>D</sub> ) .....	12 W
Output power .....	30.9 W
Lead soldering temperature (10 seconds) .....	+300°C
Storage temperature range .....	-65°C to +150°C

1/ Stresses above the absolute maximum ratings may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>2</b>

1.4 Recommended operating conditions.

Input voltage range ..... +16 V dc to +40 V dc  
 Case operating temperature range (T<sub>c</sub>)..... -55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Method Standard Microcircuits.  
 MIL-STD-1835 - Interface Standard for Microcircuit Case Outlines.

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD's).  
 MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item performance requirements for device classes D, E, G, H, and K shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 may include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for the applicable device class. Therefore, the tests and inspections herein may not be performed for the applicable device class (see MIL-PRF-38534). Furthermore, the manufacturer may take exceptions or use alternate methods to the tests and inspections herein and not perform them. However, the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>3</b>

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking of device(s). Marking of device(s) shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked in MIL-HDBK-103 and QML-38534.

3.6 Data. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DSCC-VA) upon request.

3.7 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DSCC-VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.

3.8 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

(2) T<sub>A</sub> as specified in accordance with table I of method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>4</b>

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>C</sub> ≤ +125°C V <sub>IN</sub> = 28 V dc ±0.5 V no external sync, C <sub>L</sub> = 0 unless otherwise specified	Group A subgroups	Device types	Limits		Unit
					Min	Max	
Output voltage	V <sub>OUT</sub>	I <sub>OUT</sub> = 2.0 A dc	1	01,02	14.85	15.15	V dc
			2,3		14.55	15.45	
			L, R	1,2,3	02	14.70	
Output current	I <sub>OUT</sub>	V <sub>IN</sub> = 16 V dc to 40 V dc	1,2,3	01, 02		2000	mA
			L, R	1,2,3	02	2000	
V <sub>OUT</sub> ripple voltage	V <sub>RIP</sub>	I <sub>OUT</sub> = 2.0 A BW = 10 kHz to 2 MHz	1	01,02		40	mVp-p
			2,3			90	
			L, R	1,2,3	02		
V <sub>OUT</sub> line regulation	V <sub>RLINE</sub>	V <sub>IN</sub> = 16 V dc to 40 V dc I <sub>OUT</sub> = 2.0 A	1,2,3	01,02		50	mV
			L, R	1,2,3	02		
V <sub>OUT</sub> load regulation	V <sub>RLOAD</sub>	I <sub>OUT</sub> = 0 to 2.0 A	1,2,3	01,02		50	mV
			L, R	1,2,3	02		
Input current	I <sub>IN</sub>	I <sub>OUT</sub> = 0 A, Inhibit (pin 2) = 0	1,2,3	01,02		8	mA
			L, R	1,2,3	02		
		I <sub>OUT</sub> = 0 A, Inhibit (pin 2) = open	1, 2, 3	01,02		75	
			L, R	1,2,3	02		
I <sub>IN</sub> ripple current	I <sub>RIP</sub>	I <sub>OUT</sub> = 2.0 A, BW = 10 kHz to 10 MHz	1, 2, 3	01,02		50	mA <sub>p-p</sub>
			L, R	1,2,3	02		

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>5</b>

TABLE I. Electrical performance characteristics - Continued

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T <sub>C</sub> ≤ +125°C V <sub>IN</sub> = 28 V dc ±0.5 V no external sync, C <sub>L</sub> = 0 unless otherwise specified	Group A subgroups	Device types	Limits		Unit
					Min	Max	
Efficiency	Eff	I <sub>OUT</sub> = 2.0 A	1	01	81		%
				02	79		
			2, 3	01	78		
				02	76		
L, R	1,2,3	02	72				
Isolation	ISO	Input to output or any pin to case (except pins 7 and 8) at 500V dc, T <sub>C</sub> = +25°C	1	01,02	100		MΩ
			L, R	1	02	100	
Capacitive load <u>2/ 3/</u>	C <sub>L</sub>	No effect on dc performance, T <sub>C</sub> = +25°C	4	01,02		3000	μF
			L, R	4	02		
Short circuit power dissipation,	P <sub>D</sub>	Short circuit	1	01,02		10	W
			2,3	01,02		12	
			L, R	1,2,3	02		
Switching frequency	F <sub>S</sub>	I <sub>OUT</sub> = 2.0 A	4,5,6	01,02	550	650	kHz
				L, R	02	400	
External sync range <u>4/</u>	F <sub>SYNC</sub>	I <sub>OUT</sub> = 2.0 A, TTL level to pin 9	4,5,6	01,02	500	675	kHz
				L, R	02	550	
V <sub>OUT</sub> step load transient <u>5/</u>	V <sub>TLOAD</sub>	50% load to/from 100% load	4,5,6	01,02	-500	+500	mV pk
				L, R	02	-1100	
V <sub>OUT</sub> step load transient recovery <u>3/ 5/ 6/</u>	T <sub>TLOAD</sub>	50% load to/from 100% load	4,5,6	01,02		200	us
				L, R	02		

See footnotes at end of table.

**STANDARD  
MICROCIRCUIT DRAWING**  
DEFENSE SUPPLY CENTER COLUMBUS  
COLUMBUS, OHIO 43216-5000

SIZE  
**A**

**5962-93070**

REVISION LEVEL  
**C**

SHEET  
**6**


TABLE I. Electrical performance characteristics - Continued

Test	Symbol	Conditions <sup>1/</sup> -55°C ≤ T <sub>C</sub> ≤ +125°C V <sub>IN</sub> = 28 V dc ±0.5 V no external sync, C <sub>L</sub> = 0 unless otherwise specified	Group A subgroups	Device types	Limits		Unit
					Min	Max	
V <sub>OUT</sub> step line transient <sup>3/</sup> <sup>7/</sup>	V <sub>TLINE</sub>	Input step 16 V dc to/from 40 V dc, I <sub>OUT</sub> = 2.0 A	4,5,6	01,02	-600	+600	mV pk
			L, R	4,5,6	02	-1200	
V <sub>OUT</sub> step line transient recovery <sup>3/</sup> <sup>6/</sup>	T <sub>TLINE</sub>	Input step 16 V dc to/from 40 V dc, I <sub>OUT</sub> = 2.0 A	4,5,6	01,02		300	μs
			L, R	4,5,6	02		
Start up overshoot <sup>3/</sup>	V <sub>tonOS</sub>	I <sub>OUT</sub> = 2.0 A	4,5,6	01,02		150	mV pk
			L, R	4,5,6	02		
Start up delay <sup>8/</sup>	T <sub>onD</sub>	I <sub>OUT</sub> = 2.0 A	4,5,6	01,02		5	ms
			L, R	4,5,6	02		
Load fault recovery <sup>3/</sup>	T <sub>rLF</sub>	I <sub>OUT</sub> = 2.0 A	4,5,6	01,02		5	ms
			L, R	4,5,6	02		

- <sup>1/</sup> Post irradiation testing shall be in accordance with 4.3.5 herein.
- <sup>2/</sup> Capacitive load may be any value from 0 to the maximum limit without compromising dc performance.
- <sup>3/</sup> Parameter shall be tested as part of device characterization and after design and process changes. Thereafter, parameters shall be guaranteed to the limits specified in table I.
- <sup>4/</sup> A TTL level waveform (V<sub>IH</sub> = 4.5 V minimum, V<sub>IL</sub> = 0.8 V maximum) with a 50% ±10% duty cycle applied to the sync input pin (pin 9) within the sync range frequency shall cause the converter's switching frequency to become synchronous with the frequency applied to the sync input pin (pin 9).
- <sup>5/</sup> Load step transition time greater than 10 μs.
- <sup>6/</sup> Recovery time is measured from the initiation of the transient until V<sub>OUT</sub> has returned to within ±1 percent of V<sub>OUT</sub> final value.
- <sup>7/</sup> Input step transition time greater than 10 μs.
- <sup>8/</sup> Start up delay time measurement is either for a step application of power at the input or the removal of a ground signal from the inhibit pin (pin 2) while power is applied to the input.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>7</b>

Case outline X.

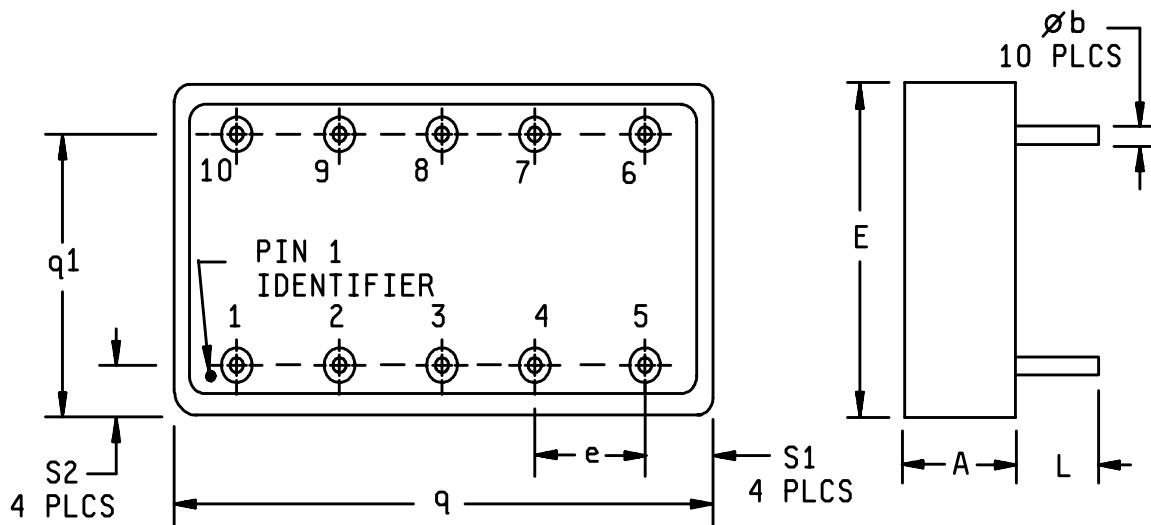

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A		10.16		0.400
$\phi b$	0.89	1.14	0.035	0.045
e	10.16 BSC		0.400 BSC	
E	28.07	28.32	1.105	1.115
L	6.09	6.60	0.240	0.260
q		53.21		2.095
q1	24.26 BSC		0.955 BSC	
S1	6.22 BSC		0.245 BSC	
S2	3.94 BSC		0.155 BSC	

NOTES:


1. The case outline X was originally designed using the inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.
2. Device weight: 52 grams.

FIGURE 1. Case outline(s).

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>8</b>



Case outline Z.

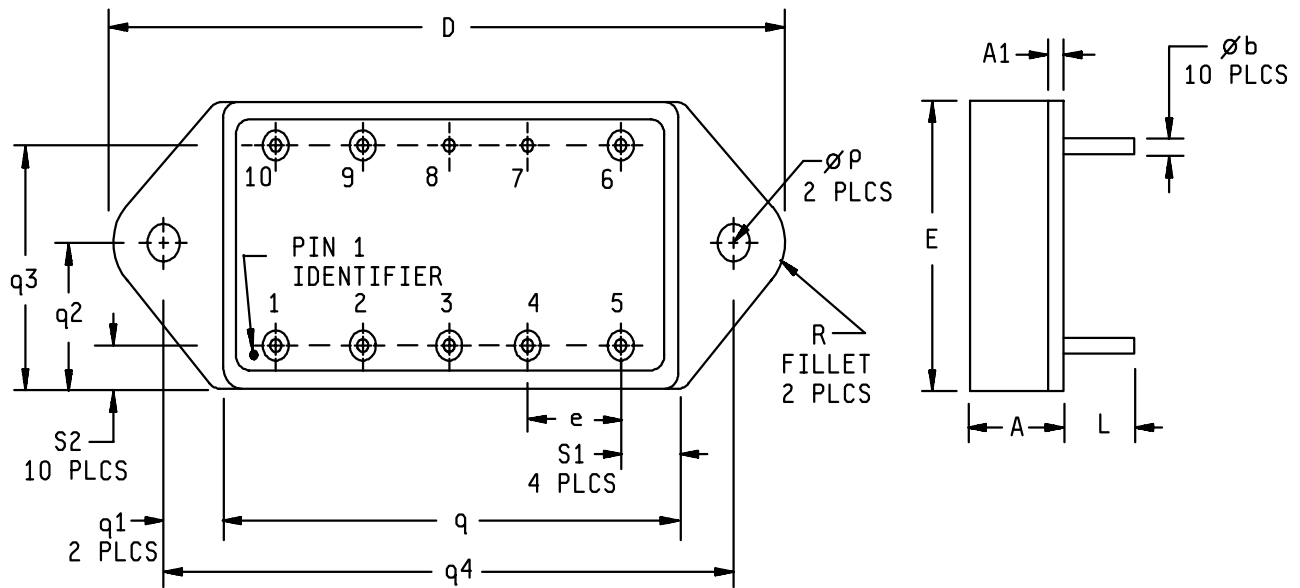

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A		10.16		0.400
A1	1.27	1.78	0.050	0.070
$\phi b$	0.89	1.14	0.035	0.045
D		73.66		2.900
e	10.16 BSC		0.400 BSC	
E	28.07	28.32	1.105	1.115
L	6.09	6.60	0.240	0.260
$\phi p$	3.99	4.19	0.157	0.165
q	53.08 BSC		2.090 BSC	
q1	5.84 BSC		0.230 BSC	
q2	14.10 BSC		0.555 BSC	
q3	24.26 BSC		0.955 BSC	
q4	64.52	65.02	2.540	2.560
R	4.19	4.44	0.165	0.175
S1	6.22 BSC		0.245 BSC	
S2	3.94 BSC		0.155 BSC	

NOTES:

1. The case outline Z was originally designed using the inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.
2. Unless otherwise specified, the tolerance is  $\pm 0.01$  for two place decimals and  $\pm 0.005$  for three place decimals.
3. Device weight: 55 grams maximum.

FIGURE 1. Case outline(s) - continued.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>9</b>

Device types	01 and 02
Case outlines	X and Z
Terminal number	Terminal symbol
1	Positive input
2	Inhibit
3	Sense return
4	Output common
5	Positive output
6	Positive sense
7	Case ground
8	Case ground
9	Sync input
10	Input common

FIGURE 2. Terminal connections.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>10</b>

TABLE II. Electrical test requirements.

MIL-PRF-38534 test requirements	Subgroups (in accordance with MIL-PRF-38534, group A test table)
Interim electrical parameters	
Final electrical parameters	1*, 2, 3, 4, 5, 6
Group A test requirements	1, 2, 3, 4, 5, 6
Group C end-point electrical parameters	1
End-point electrical parameters for radiation hardness assurance (RHA) devices	1, 2, 3, 4, 5, 6

\* PDA applies to subgroup 1.

4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.

4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10, and 11 shall be omitted.

4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.

4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
  - (2)  $T_A$  as specified in accordance with table I of method 1005 of MIL-STD-883.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>11</b>

4.3.5. Radiation hardness assurance (RHA). RHA qualification is required only for those devices with the RHA designator as specified herein.

	RHA level L	RHA level R	Units
Total ionizing dose tolerance level	50	100	kRad (Si)
Single event upset survival level (LET)	No guarantee	40	MeV

- a. Radiation dose rate is in accordance with condition C of method 1019 of MIL-STD-883. Unless otherwise specified, components are tested at a rate of 9 rad(Si)/s, in accordance with condition A of method 1019 of MIL-STD-750 or MIL-STD-883, as applicable.
- b. The manufacturer shall perform a worst-case and radiation susceptibility analysis on the device. This analysis shall show that the minimum performance requirements of each component has adequate design margin under worst-case operating conditions (extremes of line voltage, temperatures, load, frequency, radiation environment, etc.). This analysis guarantees the post-irradiation parameter limits specified in table I.
- c. RHA testing shall be performed at the component level for initial device qualification, and after design changes that may affect the RHA performance of the device. As an alternative to testing, components may be procured to manufacturer radiation guarantees that meet the minimum performance requirements. Component radiation performance guarantees shall be established in compliance with MIL-PRF-19500, Group D or MIL-PRF-38535, Group E, as applicable. For components with less than adequate performance margin, component lot radiation acceptance screening shall be performed.
- d. The manufacturer shall establish procedures controlling component radiation testing, and shall establish radiation test plans used to implement component lot qualification during procurement. Test plans and test reports shall be filed and controlled in accordance with the manufacturer's configuration management system.
- e. The device manufacturer shall designate a RHA program manager to oversee component lot qualification, and to monitor design changes for continued compliance to RHA requirements.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-PRF-38534.

6.4 Record of users. Military and industrial users shall inform Defense Supply Center Columbus when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0544.

6.5 Comments. Comments on this drawing should be directed to DSCC-VA, Post Office Box 3990, Columbus, Ohio 43216-5000, or telephone (614) 692-0512.

6.6 Sources of supply. Sources of supply are listed in MIL-HDBK-103 and QML-38534. The vendors listed in MIL-HDBK-103 and QML-38534 have submitted a certificate of compliance (see 3.7 herein) to DSCC-VA and have agreed to this drawing.

<b>STANDARD MICROCIRCUIT DRAWING</b>  DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-93070</b>
		REVISION LEVEL <b>C</b>	SHEET <b>12</b>

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 00-06-22

Approved sources of supply for SMD 5962-93070 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38534 during the next revisions. MIL-HDBK-103 and QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revisions of MIL-HDBK-103 and QML-38534.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-9307001HXA 5962-9307001HXC 5962-9307001HZA 5962-9307001HZC	50821 50821 50821 50821	MTR2815S/883 MTR2815S/883 MTR2815SF/883 MTR2815SF/883
5962-9307002HXA 5962-9307002HXC 5962-9307002HZA 5962-9307002HZC	50821 50821 50821 50821	SMTR2815S/HO SMTR2815S/HO SMTR2815SF/HO SMTR2815SF/HO
5962L9307002HXA 5962L9307002HXC 5962L9307002HZA 5962L9307002HZC	50821 50821 50821 50821	SMTR2815S/HL SMTR2815S/HL SMTR2815SF/HL SMTR2815SF/HL
5962R9307002HXA 5962R9307002HXC 5962R9307002HZA 5962R9307002HZC	50821 50821 50821 50821	SMTR2815S/HR SMTR2815S/HR SMTR2815SF/HR SMTR2815SF/HR
5962L9307002KXA 5962L9307002KXC 5962L9307002KZA 5962L9307002KZC	50821 50821 50821 50821	SMTR2815S/KL SMTR2815S/KL SMTR2815SF/KL SMTR2815SF/KL
5962R9307002KXA 5962R9307002KXC 5962R9307002KZA 5962R9307002KZC	50821 50821 50821 50821	SMTR2815S/KR SMTR2815S/KR SMTR2815SF/KR SMTR2815SF/KR

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the Vendor to determine its availability.
- 2/ **Caution.** Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE  
number

50821

Vendor name  
and address

Interpoint Corporation  
10301 Willows Road  
Redmond, WA 98073-9705

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.