
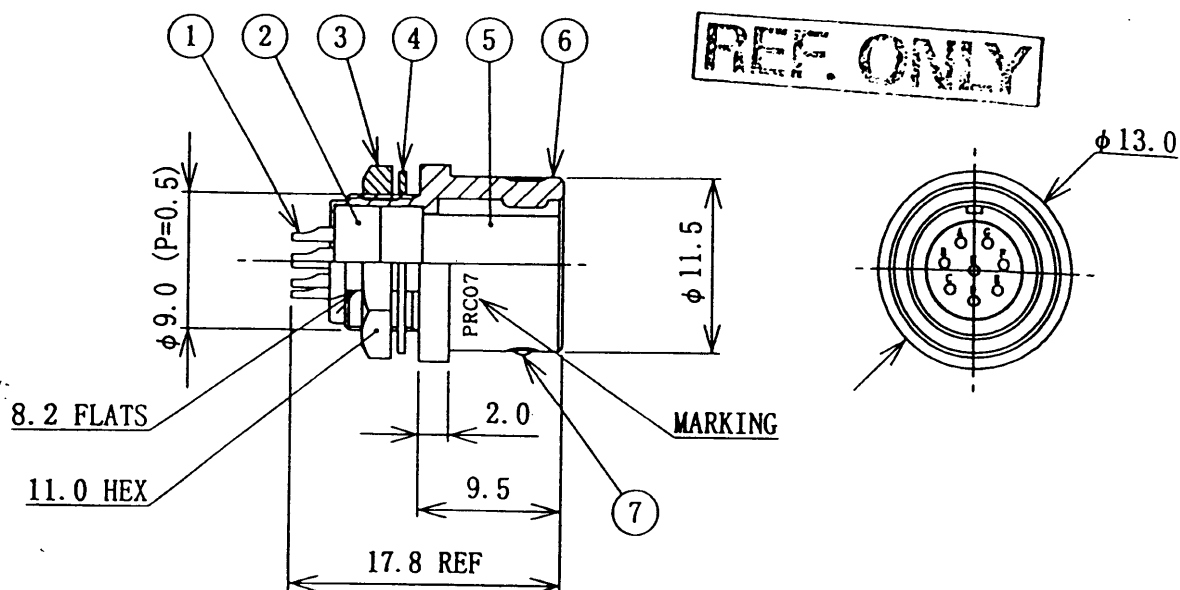





MOUNTING HOLE DIMENSIONS

NUMBER OF CONTACT
(VIEW ON TERMINATION SIDE OF INSULATOR)

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms. AT SEA LEVEL.

INSULATION RESISTANCE : 1000MΩ MIN. AT 100V D.C.

CONTACT RESISTANCE : 10mΩ MAX. D.C. 1A MAX.

2. RATING

VOLTAGE RATING : 100V rms. MAX. AT SEA LEVEL

CURRENT RATING : 2A MAX.

3. SOLDER BUCKET SIZE : 0.5 DIA.

4. MARKING : PRC07 T.M.W PAT

7	STEEL BALL	STEEL	CHROMIUM PLATED	3	
6	SHELL	BRASS	NICKEL PLATED	1	
5	FRONT INSULATOR	PBT RESIN	—	1	
4	WASHER	BRASS	NICKEL PLATED	1	
3	HEX NUT	BRASS	NICKEL PLATED	1	
2	REAR INSULATOR	PBT RESIN	—	1	
1	SOCKET CONTACT	BERYLLIUM COPPER ALLOY	GOLD FLASH OVER NICKEL PLATED	8	
品番 ITEM	部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION	尺 度 SCALE 2 / 1	(T.M.W) TAJIMI ELECTRONICS CO., LTD.	
		単位 UNITS mm	製図 DRAWN T. SHIMAZAKI	DATE 3-DEC-1998	PRC07-R8F PRC07-1009 1
		公差 TOLERANCES ON ANGLE . X . XX	設計 ENGR T. Waki	DATE 4-DEC-1998	
		仕様番号 SPEC No.	検図 CHK T. Waki	DATE 4-DEC-1998	
			承認 APPD K. Iyagi	DATE 4-DEC-1998	
SHEET					