
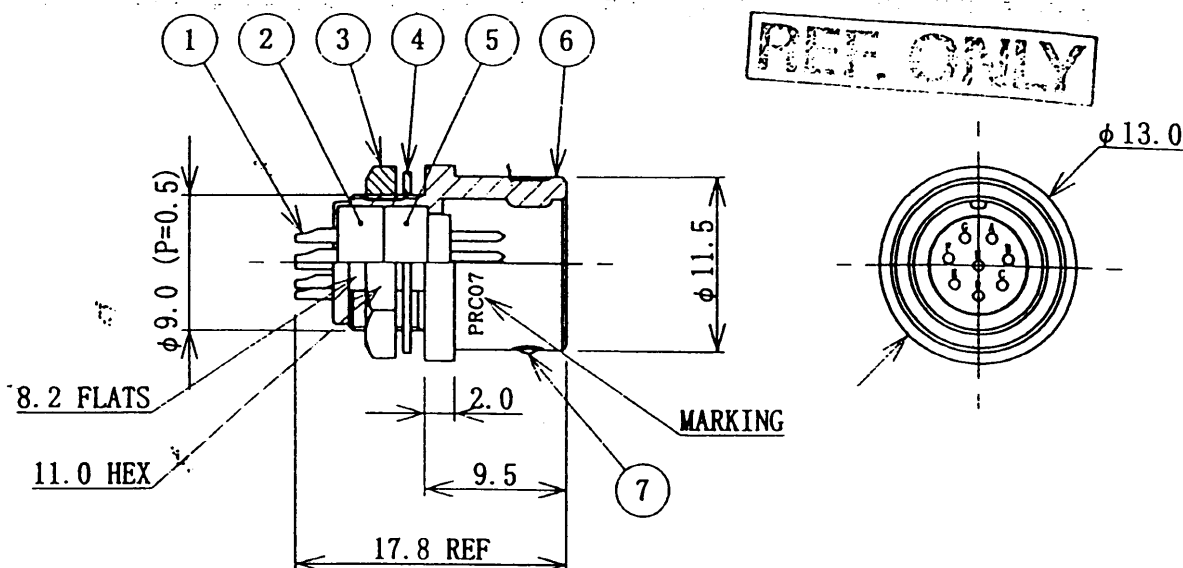





MOUNTING HOLE DIMENSIONS

NUMBER OF CONTACT
(VIEW ON TERMINATION SIDE OF INSULATOR)

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms AT SEA LEVEL.

INSULATION RESISTANCE : 1000M Ω MIN AT 100V D.C.CONTACT RESISTANCE : 10m Ω MAX D.C. 1A MAX

2. RATING

VOLTAGE RATING : 100V rms MAX AT SEA LEVEL

CURRENT RATING : 2A MAX

3. SOLDER BUCKET SIZE : 0.5 DIA

4. MARKING : PRC07 T.M.W PAT

7	STEEL BALL	STEEL	CHROMIUM PLATED	3	
6	SHELL	BRASS	NICKEL PLATED	1	
5	FRONT INSULATOR	PBT RESIN	—	1	
4	WASHER	BRASS	NICKEL PLATED	1	
3	HEX NUT	BRASS	NICKEL PLATED	1	
2	REAR INSULATOR	PBT RESIN	—	1	
1	PIN CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL PLATED	8	
品番 ITEM	部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION	尺 度 SCALE 2 / 1	(T.M.W) TAJIMI ELECTRONICS CO.,LTD.		
			単位 UNITS mm	製図 DRAWN S. SATO	DATE 11 JAN 1999	PRC07-R8M PRC07-1010 1
		交差 TOLERANCES ON ANGLE . X . XX		設計 ENGR T. Waki	DATE 11 JAN 1999	
		± ± ±		検図 CHK T. Waki	DATE 11 JAN 1999	
		仕様書番号 SPEC No.		承認 APPD K. Yagi	DATE 12 JAN 1999	

SHEET