

BDF1030 SERIES

DC FAN


Operating Temp. Range : -10 - +

Locked Rotor & Polarity Protection

Bearing : Ball Bearing

Housing : Plastic & Metal

Fan Blade : Plastic

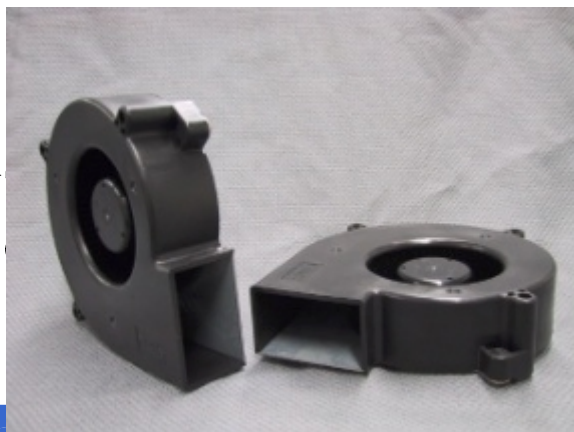

100 x 105 x 35 mm

Type	Model	Rated Voltage VDC	Operate Voltage VDC	Rated Current mA	Rated Input W	Rated Speed rpm	Max Airflow m ³ /min.	CFM	Max Static Pressure mmAq	inchAq	Noise Level dB(A)/m	Weight gr
Middle Speed	* BDF1030-12MB	12	10.2 - 13.8	500	6.0	2400	0.5	17.5	16.0	0.63	46	210
	* BDF1030-24MB	24	20.4 - 27.6	300	7.2							
High Speed	* BDF1030-12HB	12	10.2 - 13.8	900	10.8	2800	0.6	21	22.0	0.87	52	
	* BDF1030-24HB	24	20.4 - 27.6	500	12.0							

* Approvals = UL / CLR (UL FOR CANADA) / TUV

