

REVISIONS																								
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED																					

REV	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
SHEET																									
REV																									
SHEET																									
REV STATUS OF SHEETS	REV SHEET	1	2	3	4	5	6	7	8	9	10	11													

PMIC N/A STANDARDIZED MILITARY DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	PREPARED BY <i>Larry Z. Gaudin</i> CHECKED BY <i>Dorett Johnson</i> APPROVED BY <i>Mike R. [Signature]</i> DRAWING APPROVAL DATE 27 APRIL 1988 REVISION LEVEL	DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444 MICROCIRCUITS, DIGITAL, BIPOLAR, ALS SCHOTTKY TTL, QUADRUPLER, 1 OF 2 DATA SELECTORS/MULTIPLEXERS, MONOLITHIC SILICON <table style="width: 100%;"> <tr> <td style="width: 10%;">SIZE A</td> <td style="width: 20%;">CAGE CODE 67268</td> <td style="width: 70%;">5962-88625</td> </tr> <tr> <td colspan="3">SHEET 1 OF 11</td> </tr> </table>	SIZE A	CAGE CODE 67268	5962-88625	SHEET 1 OF 11		
SIZE A	CAGE CODE 67268	5962-88625						
SHEET 1 OF 11								

DESC FORM 193
SEP 87

U.S. GOVERNMENT PRINTING OFFICE: 1987 — 748-129/60911
5962-E891

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

5962-88625	01	E	X
Drawing number	Device type (1.2.1)	Case outline (1.2.2)	Lead finish per MIL-M-38510

1.2.1 Device type. The device type shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	54ALS158	Quadruple, 1 of 2 data selectors/multiplexers

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
E	D-2 (16-lead, .840" x .310" x .200"), dual-in-line package
F	F-5 (16-lead, .440" x .285" x .085"), flat package
2	C-2 (20-terminal, .358" x .358" x .100"), square chip carrier package

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc minimum to +7.0 V dc maximum
Input voltage range	-1.2 V dc at -18 mA to +7.0 V dc
Storage temperature	-65°C to +150°C
Maximum power dissipation (P_D) 1/	55 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC})	See MIL-M-38510, appendix C
Junction temperature (T_J)	+175°C

1.4 Recommended operating conditions.

Supply voltage range (V_{CC})	+4.5 V dc minimum to +5.5 V dc maximum
Minimum high level input voltage (V_{IH})	2.0 V dc
Maximum low level input voltage (V_{IL}):	
$T_C = +125^\circ\text{C}$	0.7 V dc
$T_C = -55^\circ\text{C}$	0.8 V dc
$T_C = +25^\circ\text{C}$	0.8 V dc
Case operating temperature range (T_C)	-55°C to +125°C

1/ Maximum power dissipation is defined as $V_{CC} \cdot I_{CC}$, and must withstand the added P_D due to short circuit test; e.g., I_0 .

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88625	
		REVISION LEVEL	SHEET 2

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

2. APPLICABLE DOCUMENTS

2.1 Government specification and standard. Unless otherwise specified, the following specification and standard, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Truth table. The truth table shall be as specified on figure 2.

3.2.3 Logic diagram. The logic diagram shall be as specified on figure 3.

3.2.4 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 4.

3.2.5 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in table I and apply over the full case operating temperature range.

3.4 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in 6.4 herein.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88625
		REVISION LEVEL	SHEET 3

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-096

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ -55°C < T _C < +125°C unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
High level output voltage	V _{OH}	V _{CC} = 4.5 V 2/ I _{OH} = -0.4 mA V _{IH} = 2.0 V	V _{IL} = 0.7 V 2	2.5		V
			V _{IL} = 0.8 V 1,3			
Low level output voltage	V _{OL}	V _{CC} = 4.5 V 2/ I _{OL} = 4 mA V _{IH} = 2.0 V	V _{IL} = 0.7 V 2		0.4	V
			V _{IL} = 0.8 V 1,3			
Input clamp voltage	V _{IC}	V _{CC} = 4.5 V I _{IN} = -18 mA	1,2,3		-1.2	V
Low level input current	I _{IL}	V _{CC} = 5.5 V V _{IN} = 0.4 V Unused inputs are ≥ 4.5 V	1,2,3		-0.1	mA
High level input current	I _{IH1}	V _{CC} = 5.5 V V _{IN} = 2.7 V Unused inputs = 0.0 V	1,2,3		20	μA
	I _{IH2}	V _{CC} = 5.5 V V _{IN} = 7.0 V Unused inputs = 0.0 V			0.1	mA
Output current	I _O	V _{CC} = 5.5 V 3/ V _{OUT} = 2.25 V	1,2,3	-30	-112	mA
Supply current	I _{CC}	V _{CC} = 5.5 V All inputs = 4.5 V	1,2,3		10	mA
Functional tests		See 4.3.1c 4/	7,8			
Propagation delay time, from A, B to Y output	t _{PLH1}	V _{CC} = 4.5 V to 5.5 V R _L = 500Ω C _L = 50 pF 5/ See figure 4	9,10,11	4	15	ns
	t _{PHL1}		9,10,11	2	10	ns
Propagation delay time, from A/B to Y output	t _{PLH2}		9,10,11	5	18	ns
	t _{PHL2}		9,10,11	5	18	ns
Propagation delay time, from G to Y output	t _{PLH3}		9,10,11	5	18	ns
	t _{PHL3}		9,10,11	5	18	ns

See footnotes on next page.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88625
		REVISION LEVEL	SHEET 4

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

- 1/ Unused inputs that do not directly control the pin under test must be ≥ 2.5 V or ≤ 0.4 V. No unused inputs shall exceed 5.5 V or go less than 0.0 V. No inputs shall be floated.
- 2/ All outputs must be tested. In the case where only one input at V_{IL} maximum or V_{IH} minimum produces the proper output state, the test must be performed with each input being selected as the V_{IL} maximum or V_{IH} minimum input.
- 3/ The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS} . Not more than one output will be tested at one time and the duration of the test condition shall not exceed one second.
- 4/ Functional tests shall be conducted at input test conditions of $GND \leq V_{IL} \leq V_{OL}$ and $V_{OH} \leq V_{IH} \leq V_{CC}$.
- 5/ Propagation delay limits are based on single output switching. Unused inputs = 3.5 V or ≤ 0.3 V.

3.5 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in 6.4. The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall state that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.6 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.7 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.8 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A or D using the circuit submitted with the certificate of compliance (see 3.5 herein).
 - (2) $T_A = +125^\circ\text{C}$, minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88625
		REVISION LEVEL	SHEET 5

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
- c. Subgroups 7 and 8 tests shall verify the truth table as specified on figure 2 herein.

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A or D using the circuit submitted with the certificate of compliance (see 3.5 herein).
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5005)	1*, 2, 3, 7, 8, 9, 10, 11
Group A test requirements (method 5005)	1, 2, 3, 7, 8, 9, 10, 11
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3


* PDA applies to subgroup 1.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88625	
		REVISION LEVEL	SHEET 6

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

Cases E and F

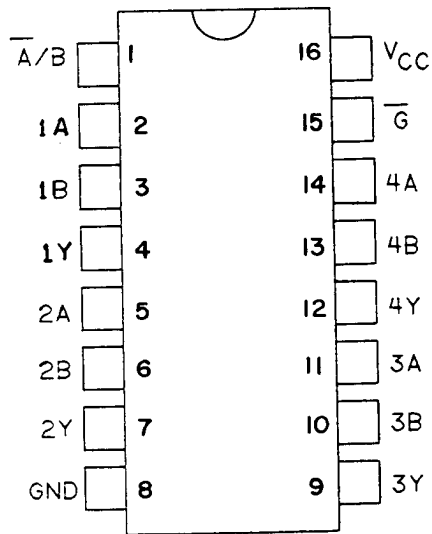

Case 2

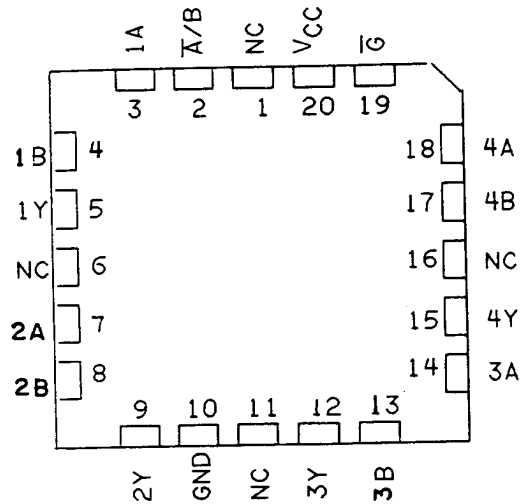


FIGURE 1. Terminal connections (top view).

**STANDARDIZED
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO 45444

SIZE
A

5962-88625

REVISION LEVEL

SHEET

7

DESC FORM 193A
SEP 87

U.S. GOVERNMENT PRINTING OFFICE: 1987 748 129-60913

Inputs				Output
Strobe \bar{G}	Select \bar{A}/B	Data		Y
		A	B	
H	X	X	X	H
L	L	L	X	H
L	L	H	X	L
L	H	X	L	H
L	H	X	H	L

H = High voltage level
 L = Low voltage level
 X = Irrelevant

FIGURE 2. Truth table.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88625
		REVISION LEVEL	SHEET 8

DESC FORM 193A
 SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987 748-129-60913


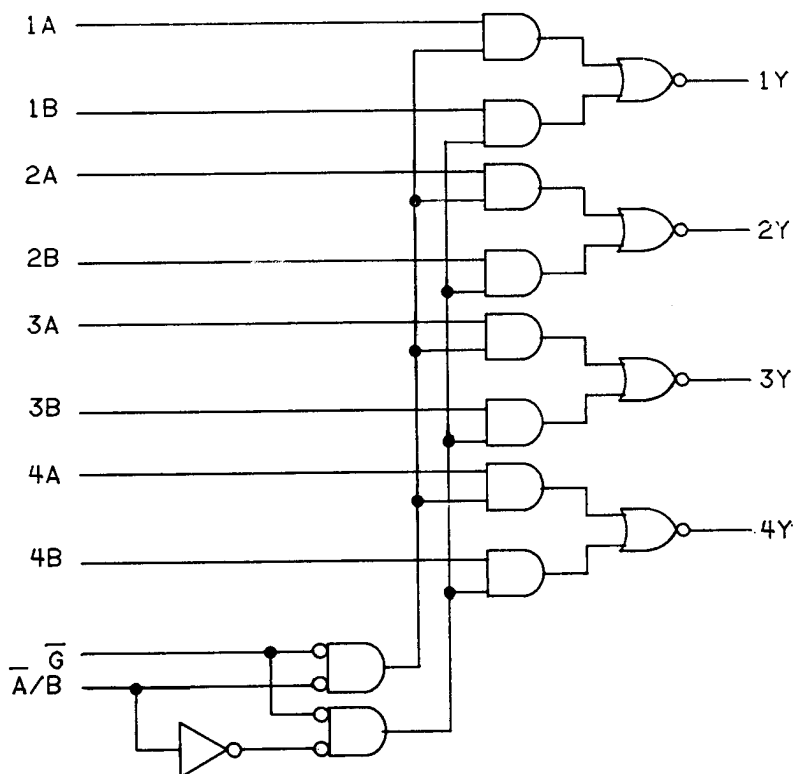


FIGURE 3. Logic diagram.


STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88625	
		REVISION LEVEL	SHEET 9

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987 - 748-129-6093

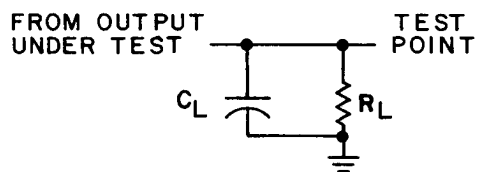

TEST CIRCUIT

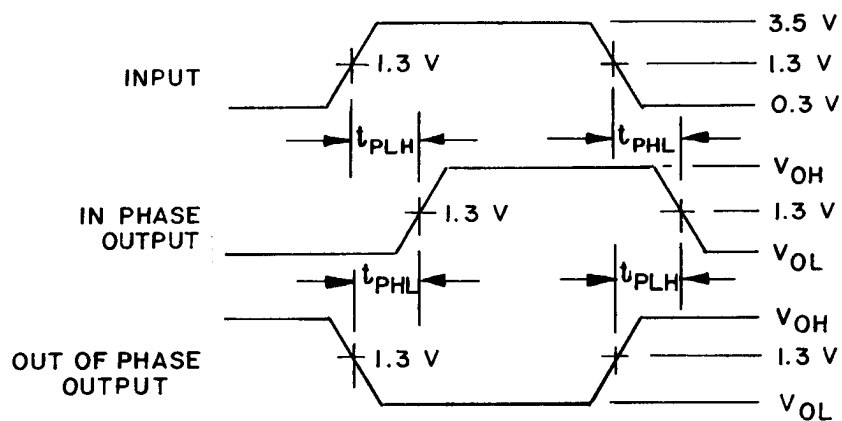

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES

NOTES:

1. C_L includes probe and jig capacitance.
2. All input pulses have the following characteristics: $PRR \leq 10$ MHz, duty cycle = 50%, $t_r = t_f = 3$ ns ± 1 ns.
3. The outputs are measured one at a time with one input transition per measurement.

FIGURE 4. Switching waveforms and test circuit.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88625
		REVISION LEVEL	SHEET 10

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987 - 748-129-60913

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone 513-296-5375.

6.4 Approved sources of supply. Approved sources of supply are listed herein. Additional sources will be added as they become available. The vendors listed herein have agreed to this drawing and a certificate of compliance (see 3.5 herein) has been submitted to DESC-ECS.

Military drawing part number	Vendor CAGE number	Vendor similar part number ^{1/}
5962-8862501EX	01295 18324	SNJ54ALS158J 54ALS158/BEA
5962-8862501FX	01295 18324	SNJ54ALS158W 54ALS158/BFA
5962-88625012X	01295 18324	SNJ54ALS158FK 54ALS158/B2A

^{1/} Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE
number

01295

18324

Vendor name
and address

Texas Instruments, Inc.
P.O. Box 6448
Midland, TX 79711

Signetics Corporation
4130 South Market Court
Sacramento, CA 95834

**STANDARDIZED
MILITARY DRAWING**

**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO 45444**

**SIZE
A**

5962-88625

REVISION LEVEL

SHEET

11

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096