

Document Title

1M x 16 bit Low Low Power 1T/1C Pseudo SRAM

Revision history

Revision No.	History	Draft Date	Remark
1.0	Initial	Jan. 04. '01	Preliminary
1.1	Revised - Change Pin Connection - Improve tOE from 45ns to 30ns - Correct State Diagram	Jul. 03. '01	Preliminary
1.2	Revised - Correct Package Dimension - Change Absolute Maximum Ratings	Jul.18. '01	Preliminary
1.3	Revised - DC Electrical Characteristics (IDPD,ICC1) - State Diagram - Power Up Sequence - Deep Power Down Sequence - Read/Write Cycle Note	Oct. 07. '01	Preliminary
1.4	Revised - DC Electrical Characteristics (ICC1: 3mA - > 5mA)	Nov. 14. '01	Preliminary
1.5	Revised - Improve Standby Current ISB1 from 100uA to 80uA - Add 70ns Part - Power Up Sequence	Dec. 20. '01	Final

2

ORDERING INFORMATION

Part Number	Speed	Power	Temperature	Package
HY64UD16162M-C	70 / 85	LL-Part	C ¹	FBGA
HY64UD16162M-E	70 / 85	LL-Part	E ²	FBGA

Note

1. C : Commercial Temp.(0°C ~ 70°C)
2. E : Extended Temp. (-25°C ~ 85°C)

ABSOLUTE MAXIMUM RATINGS ¹

Symbol	Parameter	Rating	Unit	Remark
V _{IN} , V _{OUT}	Input/Output Voltage	-0.3 to V _{dd} +0.3	V	
V _{dd}	Power Supply	-0.3 to 3.3	V	
T _A	Ambient Temperature	0 to 70	°C	HY64UD16162M-C
		-25 to 85	°C	HY64UD16162M-E
T _{STG}	Storage Temperature	-55 to 150	°C	
P _D	Power Dissipation	1.0	W	
T _{SOLDER}	Ball Soldering Temperature & Time	260•10	°C•sec	

Note

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and the functional operation of the device under these or any other conditions above those indicated in the operation of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect reliability.

TRUTH TABLE

/CS1	CS2	/WE	/OE	/LB	/UB	Mode	I/O Pin		Power
							I/O1~I/O8	I/O9~I/O16	
H	H	X	X	X	X	Deselected	High-Z	High-Z	Standby
X	L	X	X	X	X	Deselected	High-Z	High-Z	Deep Power Down
X	H	X	X	H	H	Deselected	High-Z	High-Z	Standby
L	H	L	X	L	H	Write	D _{IN}	High-Z	Active
L	H	H	L	L	H	Read	D _{OUT}	High-Z	Active
L	H	H	H	L	H	Output Disabled	High-Z	High-Z	Active
L	H	L	X	H	L	Write	High-Z	D _{IN}	Active
L	H	H	L	H	L	Read	High-Z	D _{OUT}	Active
L	H	H	H	H	L	Output Disabled	High-Z	High-Z	Active
L	H	L	X	L	L	Write	D _{IN}	D _{IN}	Active
L	H	H	L	L	L	Read	D _{OUT}	D _{OUT}	Active
L	H	H	H	L	L	Output Disabled	High-Z	High-Z	Active

Note

1. H=V_{IH}, L=V_{IL}, X=don't care(V_{IL} or V_{IH})
2. /UB, /LB(Upper, Lower Byte enable)
These active LOW inputs allow individual bytes to be written or read.
When /LB is LOW, data is written or read to the lower byte, I/O1 - I/O8.
When /UB is LOW, data is written or read to the upper byte, I/O9 - I/O16.

RECOMMENDED DC OPERATING CONDITION

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{dd}	Supply Voltage	2.7	3.0	3.3	V
V _{SS}	Ground	0	-	0	V
V _{IH}	Input High Voltage	2.2	-	V _{dd} +0.3	V
V _{IL}	Input Low Voltage	-0.3 ¹	-	0.6	V

Note 1. V_{IL}=-1.5V for pulse width less than 10ns

Undershoot is sampled, not 100% tested.

DC ELECTRICAL CHARACTERISTICS

V_{dd}=2.7V~3.3V, T_A=0°C to 70°C(C) / -25°C to 85°C(E)

Sym.	Parameter	Test Condition	Min.	Typ.	Max.	Unit	
ILI	Input Leakage Current	VSS≤VIN≤Vdd	-1	-	1	μA	
ILO	Output Leakage Current	VSS≤VOUT≤Vdd, /CS1=VIH, CS2=VIH, /OE=VIH or /WE=VIL	-1	-	1	μA	
ICC	Operating Power Supply Current	/CS1=VIL, CS2=VIH, VIN=VIH or VIL, I/I/O=0mA	-	-	3	mA	
ICC1	Average Operating Current	/CS1≤ 0.2V, CS2 ≥Vdd-0.2V, VIN ≤0.2V or VIN≥Vdd-0.2V, Cycle Time=1μs. 100% Duty, I/I/O=0mA	-	-	5	mA	
ICC2		/CS1=VIL, CS2=VIH, VIN=VIH or VIL, Cycle Time=Min. 100% Duty, I/I/O=0mA	-	-	30	mA	
ISB	TTL Standby Current	/CS1,CS2=VIH or /UB,/LB= VIH	-	-	0.5	mA	
ISB1	Standby Current(CMOS Input)	/CS1, CS2≥Vdd-0.2V or /UB,/LB ≥Vdd-0.2V	70ns	-	-	100	μA
		85ns	-	-	80	μA	
IDPD	Deep Power Down Current	CS2≤VSS+0.2V	-	-	2	μA	
VOL	Output Low Voltage	IOL=2.1mA	-	-	0.4	V	
VOH	Output High Voltage	IOH=-1.0mA	2.4	-	-	V	

CAPACITANCE

(Temp = 25°C, f=1.0MHz)

Symbol	Parameter	Condition	Max.	Unit
C _{IN}	Input Capacitance(Add, /CS1, CS2, /WE, /OE, /UB, /LB)	V _{IN} =0V	8	pF
C _{OUT}	Output Capacitance(I/O)	V _{I/O} =0V	10	pF

Note : These parameters are sampled and not 100% tested

AC CHARACTERISTICS

V_{dd}=2.7V~3.3V, T_A = 0°C to 70°C(C) / -25°C to 85°C(E), unless otherwise specified


#	Symbol	Parameter	-70		-85		Unit
			Min.	Max.	Min.	Max.	
Read Cycle							
1	tRC	Read Cycle Time	70	-	85	-	ns
2	tAA	Address Access Time	-	70	-	85	ns
3	tACS	Chip Select Access Time	-	70	-	85	ns
4	tOE	Output Enable to Output Valid	-	20	-	30	ns
5	tBA	/LB, /UB Access Time	-	70	-	85	ns
6	tCLZ	Chip Select to Output in Low Z	10	-	10	-	ns
7	tOLZ	Output Enable to Output in Low Z	5	-	5	-	ns
8	tBLZ	/LB, /UB Enable to Output in Low Z	10	-	10	-	ns
9	tCHZ	Chip Disable to Output in High Z	0	20	0	30	ns
10	tOHZ	Out Disable to Output in High Z	0	20	0	30	ns
11	tBHZ	/LB, /UB Disable to Output in High Z	0	20	0	30	ns
12	tOH	Output Hold from Address Change	10	-	10	-	ns
Write Cycle							
13	tWC	Write Cycle Time	70	-	85	-	ns
14	tCW	Chip Selection to End of Write	60	-	70	-	ns
15	tAW	Address Valid to End of Write	60	-	70	-	ns
16	tBW	/LB, /UB Valid to End of Write	60	-	70	-	ns
17	tAS	Address Set-up Time	0	-	0	-	ns
18	tWP	Write Pulse Width	50	-	60	-	ns
19	tWR	Write Recovery Time	0	-	0	-	ns
20	tWHZ	Write to Output in High Z	0	20	0	30	ns
21	tDW	Data to Write Time Overlap	30	-	30	-	ns
22	tDH	Data Hold from Write Time	0	-	0	-	ns
23	tOW	Output Active from End of Write	5	-	5	-	ns

AC TEST CONDITIONS

T_A = 0°C to 70°C(C) / -25°C to 85°C(E), unless otherwise specified

Parameter	Value
Input Pulse Level	0.4V to 2.2V
Input Rising and Fall Time	5ns
Input and Output Timing Reference Level	1.5V
Output Load	See Below

AC TEST LOADS

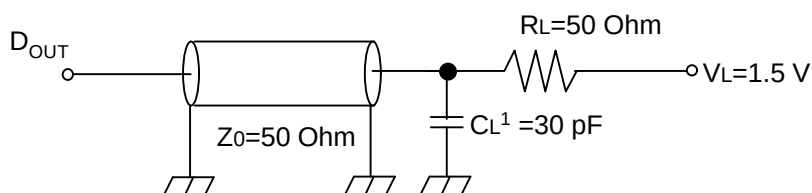

Note

1. Including jig and scope capacitance.

Power-Up Sequence

1. Supply power with CS2 high after /CS1 be held at a valid V_{IH} or V_{IL} .
2. Maintain stable power for longer than 200 μ s.


Deep Power Down Entry Sequence

1. Keep CS2 low state.
Deep power down mode is maintained while CS2 is low state.

Deep Power Down Exit Sequence

1. Keep CS2 high after /CS1 be held at a valid V_{IH} or V_{IL} .
2. Maintain stable power for longer than 200 μ s.

STATE DIAGRAM

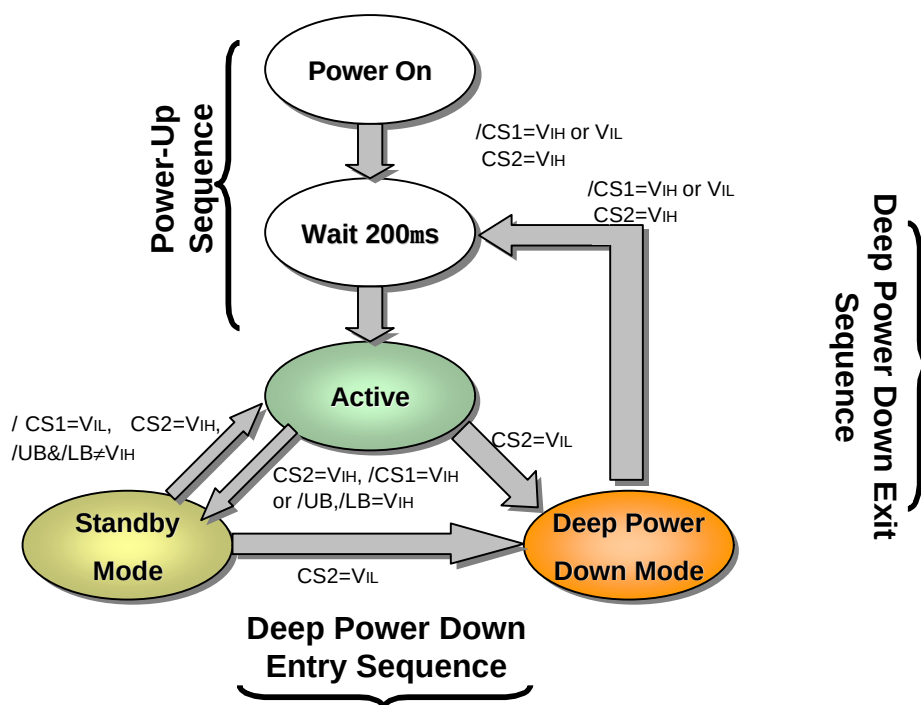


STANDBY MODE CHARACTERISTICS


Mode	Memory Cell Data	Standby Current[μ A]	Wait Time[μ s]
Standby	Valid	100 / 70ns	0
		80 / 85ns	
Deep Power Down	Invalid	2	200

TIMING DIAGRAM


READ CYCLE 1 (Note 1, 4)

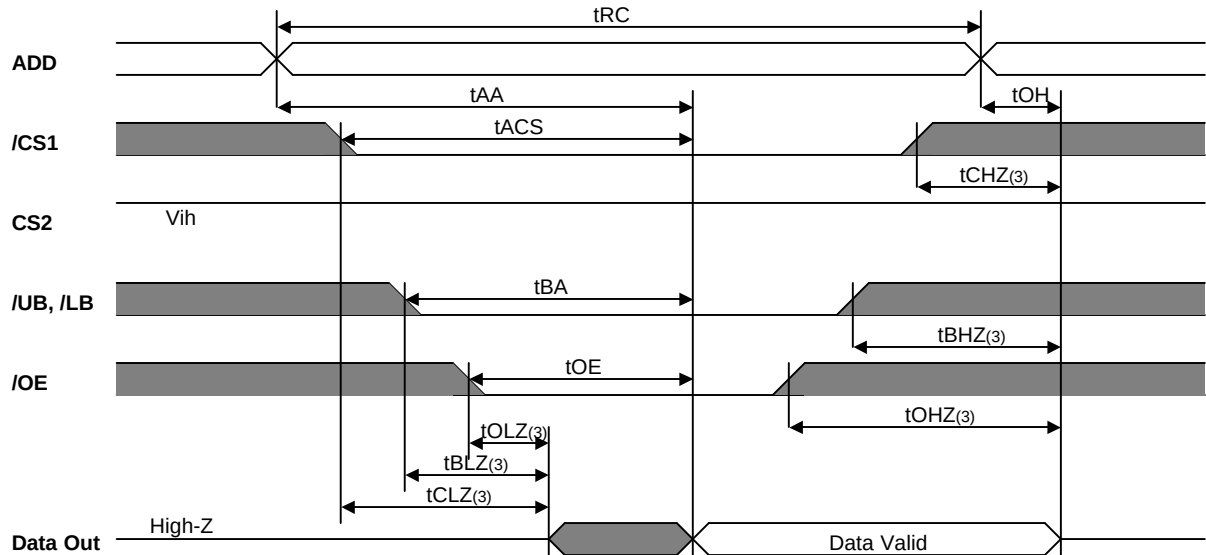

READ CYCLE 2 (Note 1, 2, 4)(CS2=Vih)


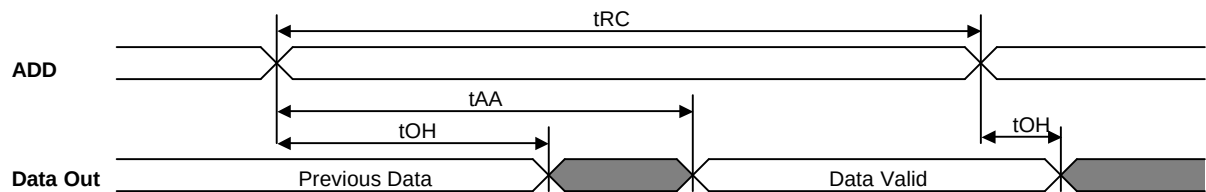


READ CYCLE 3 (Note 1, 2, 4)(CS2=Vih)

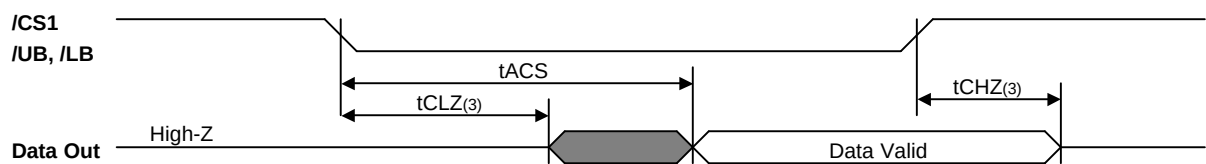

Notes :

1. Read Cycle occurs whenever a high on the /WE and /OE is low, while /UB and/or /LB and /CS1 and CS2 are in active status.
2. /OE = V_{IL}
3. tCHZ, tBHZ and tOHZ are defined as the time at which the outputs achieve the high impedance state and tOLZ, tBLZ and tCLZ are defined as the time at which the outputs achieve the low impedance state. These are not referenced to output voltage levels.
4. /CS1 in high for the standby, low for active.
/UB and /LB in high for the standby, low for active.

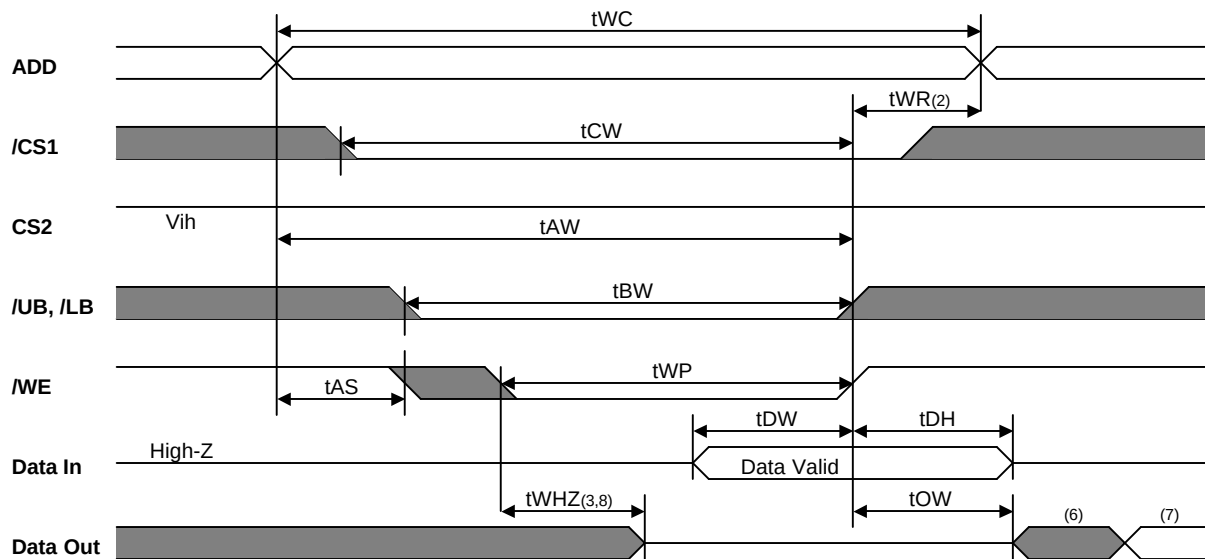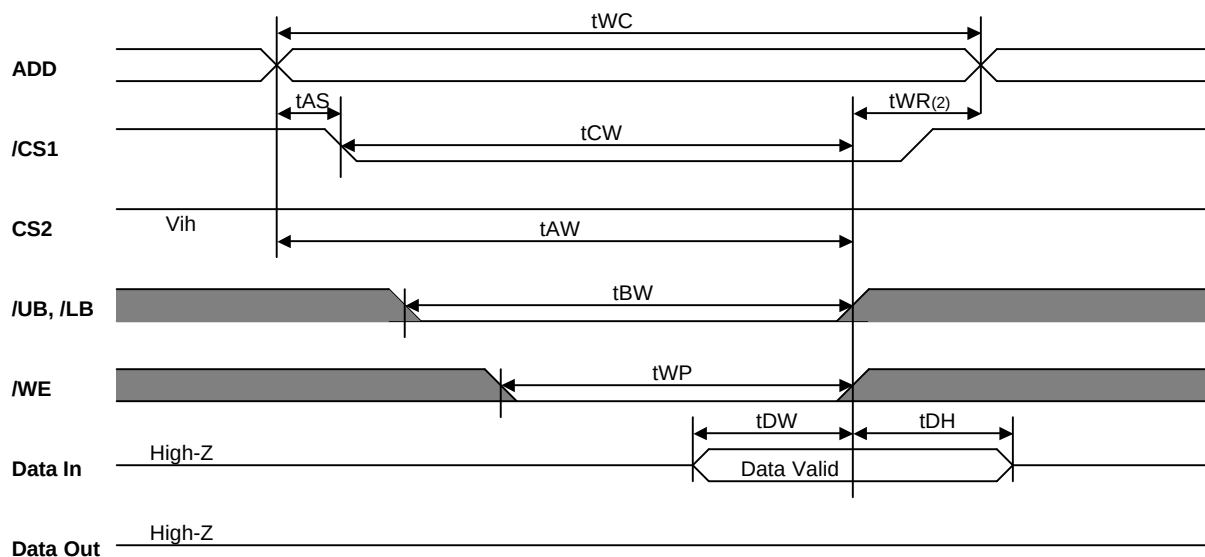
WRITE CYCLE 1 (Note 1, 4, 5, 9, 10) (/WE Controlled)

WRITE CYCLE 2 (Note 1, 4, 5, 9, 10) (/CS1 Controlled)

Notes :

1. A write occurs during the overlap of low /CS1, low /WE and low /UB and/or /LB.
2. tWR is measured from the earlier of /CS1, /LB, /UB, or /WE going high to the end of write cycle.
3. During this period, I/O pins are in the output state so that the input signals of opposite phase to the output must not be applied.
4. If the /CS1, /LB and /UB low transition occur simultaneously with the /WE low transition or after the /WE transition, outputs remain in a high impedance state.
5. /OE is continuously low (OE=V_{IL})
6. Q(data out) is the invalid data.
7. Q(data out) is the read data of the next address.
8. tWHZ is defined as the time at which the outputs achieve the high impedance state.
It is not referenced to output voltage levels.
9. /CS1 in high for the standby, low for active. /UB and /LB in high for the standby, low for active.
10. Do not input data to the I/O pins while they are in the output state.


AVOID TIMING

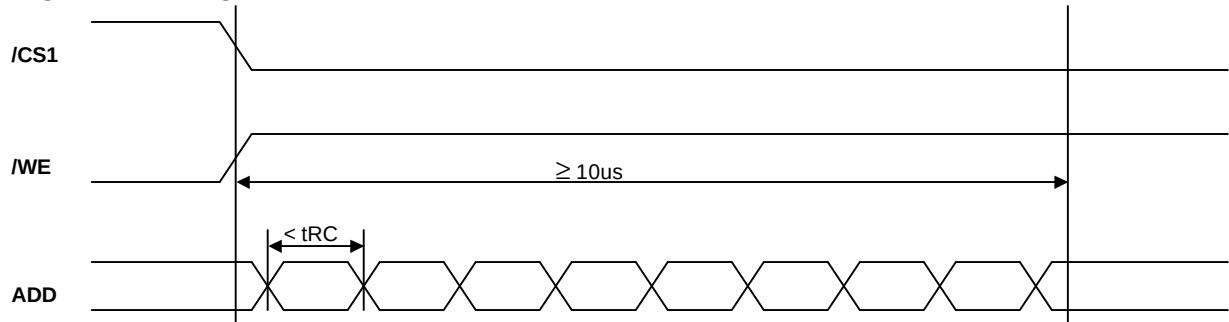Hynix 1T/1C SRAM has a timing which is not supported at read operation. If your system has multiple invalid address signal shorter than t_{RC} during over 10us at read operation which showed in abnormal timing, Hynix 1T/1C SRAM needs a normal read timing at least during 10us which showed in avoidable timing(1) or toggle the /CS1 to high($\geq t_{RC}$) one time at least which showed in avoidable timing(2)


ABNORMAL TIMING



AVOIDABLE TIMING(1)

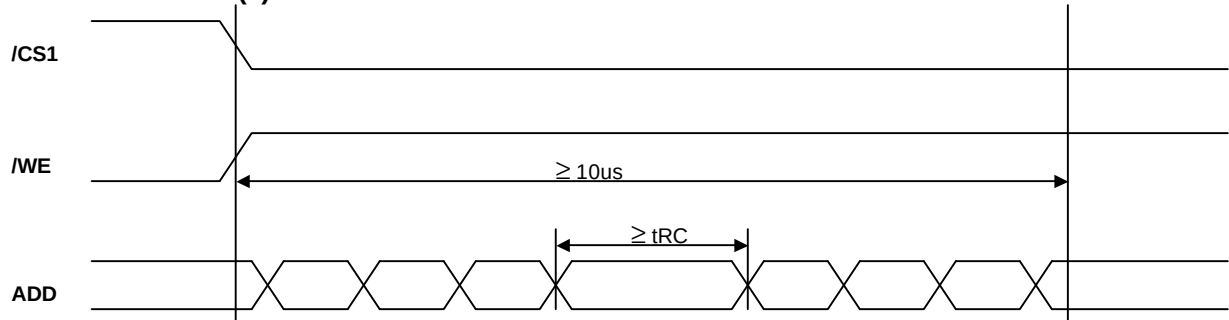


AVOIDABLE TIMING(2)

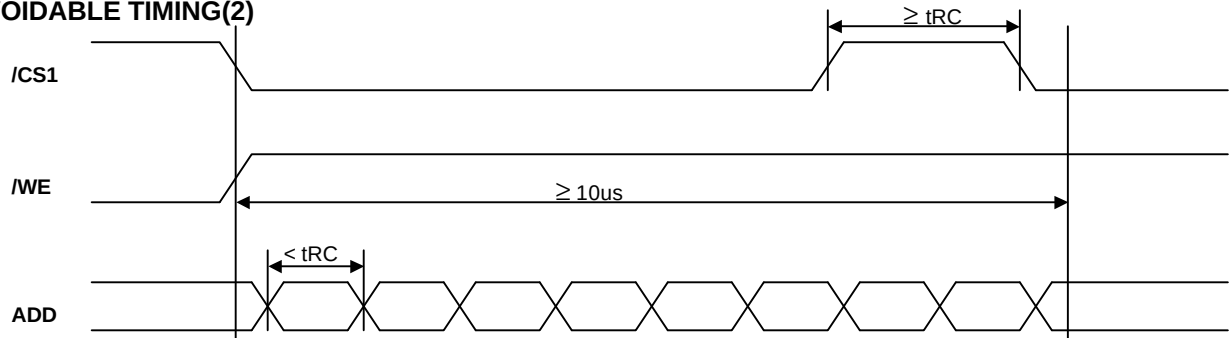

PACKAGE DIMENSION

48ball Fine Pitch Ball Grid Array Package(F)

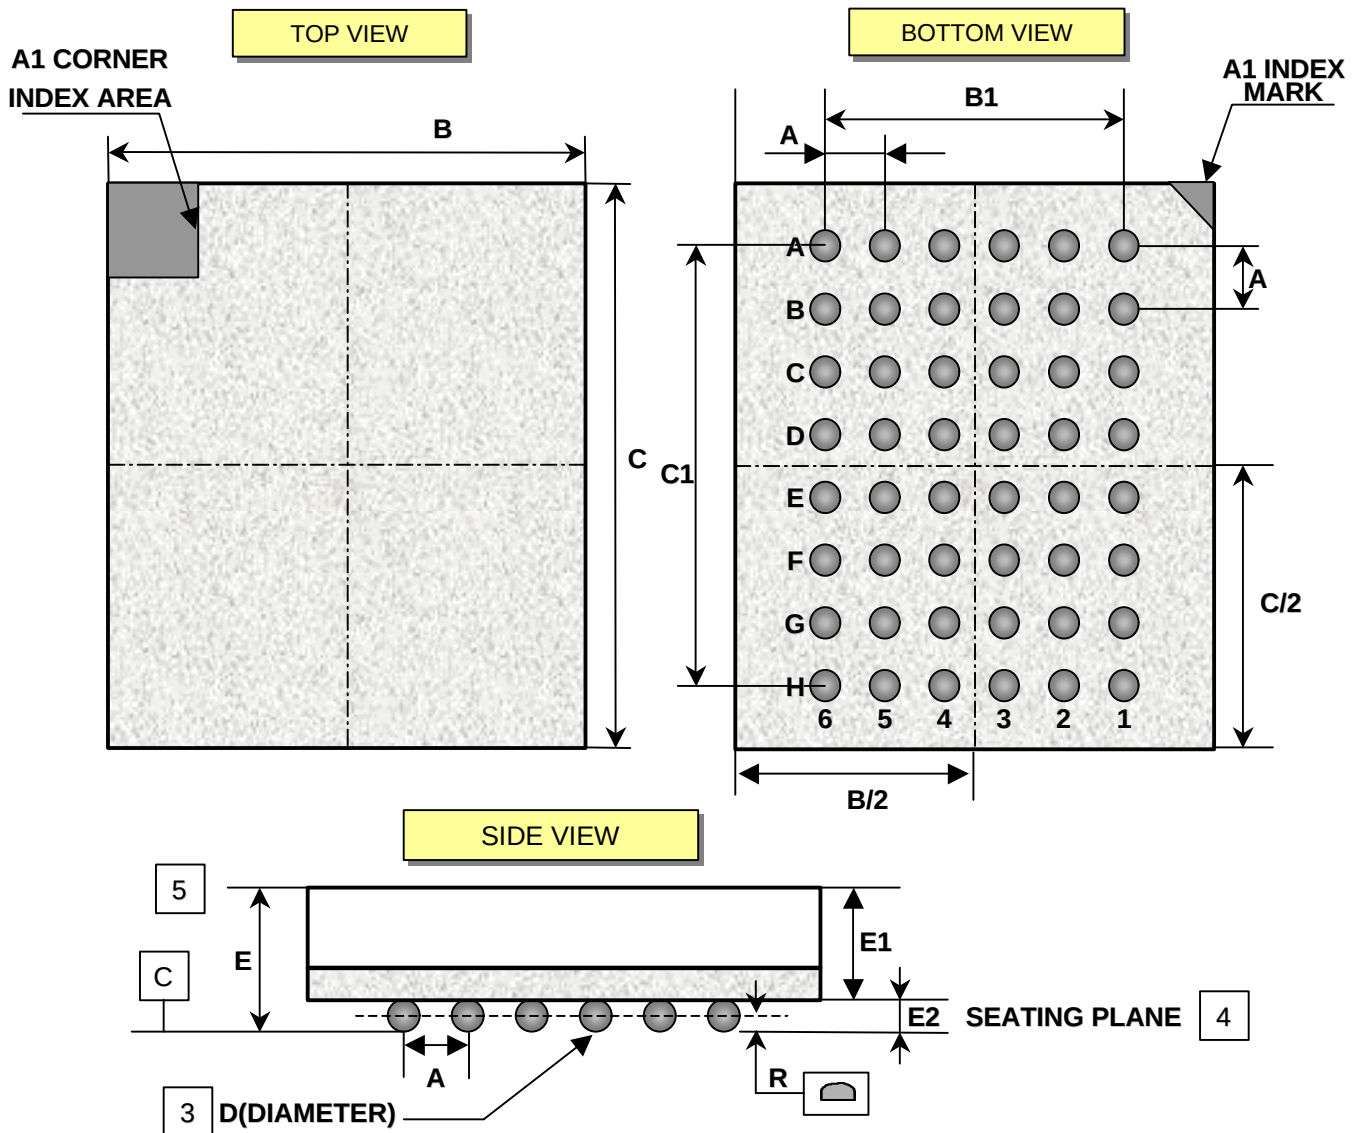


unit : mm

Symbol	Min.	Typ.	Max.
A	-	0.75	-
B	6.90	7.00	7.10
B1	-	3.75	-
C	7.90	8.00	8.10
C1	-	5.25	-
D	0.30	0.35	0.40
E	-	1.00	1.10
E1	-	0.75	-
E2	0.20	0.25	0.30
R	-	-	0.08

NOTE.

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE MILLIMETERS.
3. DIMENSION "D" IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER IN A PLANE PARALLEL TO DATUM C.
4. PRIMARY DATUM C(SEATING PLANE) IS DEFINED BY THE CROWN OF THE SOLDER BALLS.
5. THIS IS A CONTROLLING DIMENSION.

MARKING INFORMATION

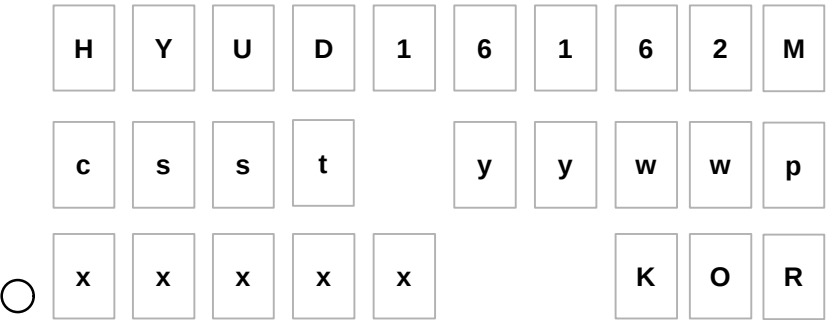Package	Marking Example
FBGA	
Index	
• HYUD16162M : Part Name • HY : HYNIX • U : Power Supply : 3.0V(2.7V~3.3V) • D : Tech. + Classification : 1T+1C • 16 : Bit Organization : x16 • 16 : Density : 16M • 2 : Mode : 1CS with /UB,/LB;tCS • M : Version : 1st Generation	
• c : Power Consumption : D – Low Low Power • ss : Speed : 70 – 70ns 85 – 85ns • t : Temperature : C – Commercial(0 ~ 70°C) E – Extended(-25 ~ 85°C)	
• yy : Year (ex : 01 = year 2001, 02= year 2002) • ww : Work Week (ex : 12 = work week 12) • p : Process Code	
• xxxxx : Lot No. • KOR : Origin Country	
Note - Capital Letter : Fixed Item - Small Letter : Non-fixed Item	