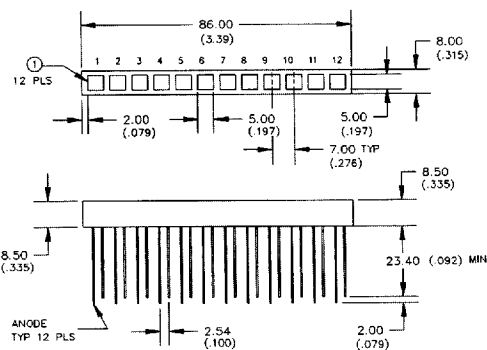

SSA-LXB120XX SERIES 5x5mm SQUARE LED ARRAY (12) LEDS

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Single Unit Assembly • Easy Installation • Four Color Options • Mixed Color Units	• Level Indicators • Progress Status Indicators • Mix Indicators	• Holder: White Nylon • Terminations: □ .020" Pins • Installation: P.C. or Wire Wrap

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED
SSA-LXB120ID	RED	635	5-25	2.2	6	20 SSL-LX5573XX
SSA-LXB120SRD	RED	660	5-25	1.7	25	20 SSL-LX5573XX
SSA-LXB120GD	GREEN	565	5-25	2.2	6	20 SSL-LX5573XX
SSA-LXB120YD	YELLOW	585	5-25	2.2	6	20 SSL-LX5573XX

RATINGS ARE PER SINGLE LED UNIT

See pages 8-14 for Max. operating limits and operating curves

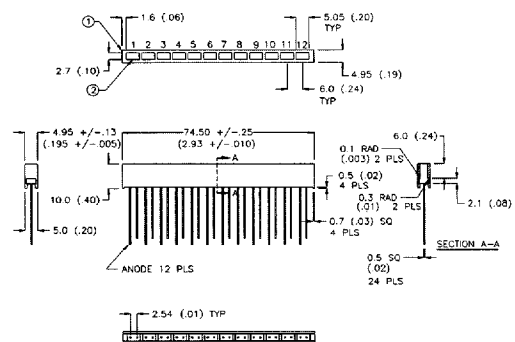
DIMENSIONS (mm/inch) ±.2mm

SSA-LXH1225XX SERIES 2.5x5mm RECT. LED ARRAY (12) LEDS

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Single Unit Assembly • Easy Installation • Four Color Options • Mixed Color Units	• Level Indicators • Progress Status Indicators • Mix Indicators	• Holder: White or Black Nylon • Terminations: □ .02" Pins • Installation: P.C. or Wire Wrap

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED
SSA-LXH1225ID	RED	635	5-25	2.2	8	20 SSL-LX25573XX
SSA-LXH1225SRD	RED	660	5-25	1.7	30	20 SSL-LX25573XX
SSA-LXH1225GD	GREEN	565	5-25	2.2	8	20 SSL-LX25573XX
SSA-LXH1225YD	YELLOW	585	5-25	2.2	8	20 SSL-LX25573XX

RATINGS ARE PER SINGLE LED UNIT

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSA-LXH1025XX SERIES 2.5x5mm RECT. LED ARRAY (10) LEDS

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Single Unit Assembly • Easy Installation • Four Color Options • Mixed Color Units	• Level Indicators • Progress Status Indicators • Mix Indicators	• Holder: Black Nylon • Terminations: □ .02" Pins • Installation: P.C. or Wire Wrap

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED
SSA-LXH1025ID	RED	635	5-25	2.2	8	20 SSL-LX25573XX
SSA-LXH1025SRD	RED	660	5-25	1.7	30	20 SSL-LX25573XX
SSA-LXH1025GD	GREEN	565	5-25	2.2	8	20 SSL-LX25573XX
SSA-LXH1025YD	YELLOW	585	5-25	2.2	8	20 SSL-LX25573XX

COLOR COMBINATIONS AVAILABLE AT NO ADDED COST

RATINGS ARE PER SINGLE LED UNIT

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm
