


Inductors

Commercial, Molded



STANDARD ELECTRICAL SPECIFICATIONS

MODEL*	IND. (μH)	TOL.	Q MIN.	TEST FREQ. (MHz)	SRF MIN. (MHz)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)
IM-6RFCS-40	0.10	± 10%	75	50	400	0.02	4000
IM-6RFCS-40	0.12	± 10%	75	50	400	0.025	3500
IM-6RFCS-40	0.15	± 10%	75	50	400	0.03	3000
IM-6RFCS-40	0.18	± 10%	75	50	400	0.03	3000
IM-6RFCS-40	0.22	± 10%	75	50	400	0.03	3000
IM-6RFCS-40	0.27	± 10%	70	45	376	0.04	2700
IM-6RFCS-40	0.33	± 10%	70	40	352	0.05	2500
IM-6RFCS-40	0.39	± 10%	65	40	320	0.08	2000
IM-6RFCS-40	0.47	± 10%	60	25	288	0.08	2000
IM-6RFCS-40	0.56	± 10%	55	25	264	0.10	1700
IM-6RFCS-40	0.68	± 10%	55	25	240	0.12	1500
IM-6RFCS-40	0.82	± 10%	50	25	220	0.18	1300
IM-6RFCS-40	1.0	± 10%	50	20	200	0.24	1100
IM-6RFCS-40	1.2	± 10%	45	20	176	0.35	1000
IM-6RFCS-40	1.5	± 10%	45	15	160	0.43	850
IM-6RFCS-40	1.8	± 10%	45	15	144	0.65	720
IM-6RFCS-40	2.2	± 10%	45	15	132	0.80	610
IM-6RFCS-40	2.7	± 10%	55	10	88	0.12	1600
IM-6RFCS-40	3.3	± 10%	55	10	80	0.15	1400
IM-6RFCS-40	3.9	± 10%	60	10	76	0.23	1200
IM-6RFCS-40	4.7	± 10%	70	7.9	72	0.30	1000
IM-6RFCS-40	5.6	± 10%	65	7.9	64	0.45	900
IM-6RFCS-40	6.8	± 10%	65	7.9	56	0.55	800
IM-6RFCS-40	8.2	± 10%	60	7.9	52	0.65	720
IM-6RFCS-40	10	± 10%	60	5	48	0.73	650
IM-6RFCS-40	12	± 10%	65	5	42	1.1	590
IM-6RFCS-40	15	± 10%	80	2.5	38	1.4	500
IM-6RFCS-40	18	± 10%	75	2.5	34	1.6	460
IM-6RFCS-40	22	± 10%	75	2.5	32	1.8	430
IM-6RFCS-40	27	± 5%	75	2.5	29	2.7	360
IM-6RFCS-40	33	± 5%	85	2.5	26	3.5	300
IM-6RFCS-40	39	± 5%	80	2.5	21	3.8	290
IM-6RFCS-40	47	± 5%	80	2.5	18	4.0	275
IM-6RFCS-40	56	± 5%	75	2.5	15	4.4	265
IM-6RFCS-40	68	± 5%	75	2.5	13	4.7	250
IM-6RFCS-40	82	± 5%	75	2.5	10	5.3	235
IM-6RFCS-40	100	± 5%	75	1.5	8	6.0	220
IM-6RFCS-40	120	± 5%	65	0.79	5.7	5.0	170
IM-6RFCS-40	150	± 5%	65	0.79	5.4	5.8	164
IM-6RFCS-40	180	± 5%	65	0.79	5.0	6.6	158
IM-6RFCS-40	220	± 5%	65	0.79	4.7	7.4	155
IM-6RFCS-40	270	± 5%	65	0.79	4.5	8.0	150
IM-6RFCS-40	300	± 5%	65	0.79	4.2	8.6	145
IM-6RFCS-40	330	± 5%	65	0.79	4.0	8.9	142
IM-6RFCS-40	360	± 5%	65	0.79	3.8	9.6	137
IM-6RFCS-40	390	± 5%	65	0.79	3.6	9.9	135
IM-6RFCS-40	430	± 5%	65	0.79	3.4	10.4	131
IM-6RFCS-40	470	± 5%	65	0.79	3.2	10.9	128
IM-6RFCS-40	510	± 5%	65	0.79	3.0	11.6	124
IM-6RFCS-40	560	± 5%	65	0.79	2.9	11.8	123
IM-6RFCS-40	620	± 5%	60	0.79	2.8	12.5	120
IM-6RFCS-40	680	± 5%	60	0.79	2.7	13.5	115
IM-6RFCS-40	750	± 5%	60	0.79	2.6	14.0	113
IM-6RFCS-40	820	± 5%	60	0.79	2.5	15.0	110
IM-6RFCS-40	910	± 5%	60	0.79	2.4	15.5	107
IM-6RFCS-40	1000	± 5%	60	0.79	2.2	16.5	104

PHENOLIC CORE

IRON CORE

FEATURES

- Classification is Grade 1, Class B.
- Inductance range is .10μH to 1000μH.
- Proven reliability molded inductors.

ELECTRICAL SPECIFICATIONS

Inductance Tolerance: ± 10% on Q-Meter for 0.10μH to 22μH.
 ± 5% 1000 cps bridge for 27μH to 100μH.
 ± 5% on Q-Meter for 120μH to 1000μH.

NOTE: L and Q are not always tested at the same frequency. Inductance values that are tested on Q-Meter, are tested at standard test frequencies.

Dielectric Strength: 700V RMS at sea level.

Operating Temperature: - 55°C to + 125°C.

Self-Resonant Frequency: Minimum SRF measured with full length leads on Grid-Dip Meter.

Q: Measured on Q-Meter.

MECHANICAL SPECIFICATIONS

Terminal Strength: Meets 5 pound pull test per MIL-C-15305 (latest revision).


DENSITY SPECIFICATIONS

Weight: .9 gram maximum.

ENVIRONMENTAL SPECIFICATIONS

Moisture and Shock Resistance: Meets requirements of MIL-C-15305, Grade 1, Class B.

Vibration: High frequency, 10Hz to 2000Hz @ 20 g ± 10% maximum for 12 logarithmic swings, each of 20 minute duration repeated for each of three mutually perpendicular planes.

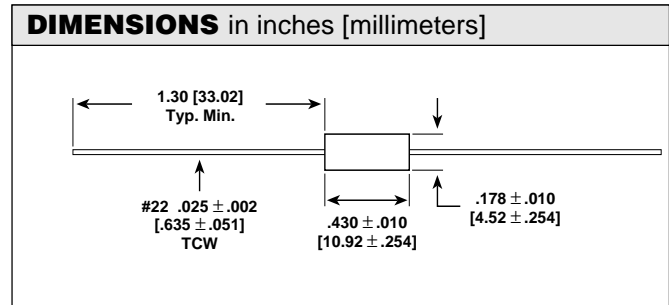

MARKING

— Color coded per MIL-C-15305 (latest revision)

ORDERING INFORMATION

IM-6RFCS-40	10μH	± 10%
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE

*Model electricals and tolerances shown.