


# Graphic 128x64 dots **WX12864A**

## Dimension drawing

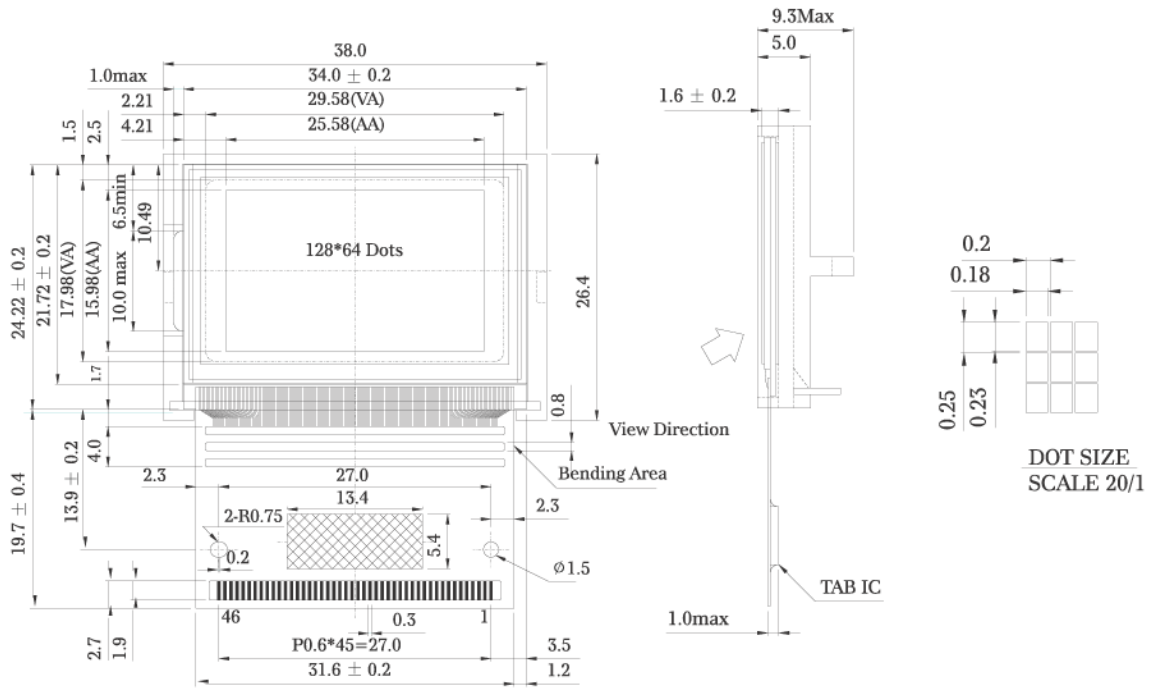

### Feature

1. Built-in controller Samsung- (KS0713)
2. +3V or +5V power supply
3. 1/65 duty cycle

Pin NO.	Symbol	Pin NO.	Symbol
1	NC	24	CLS
2	TEMPS	25	MS
3	INTRS	26	DUTY1
4	HPM	27	DUTY0
5	DCDC5B	28	DB7
6	BSTS	29	DB6
7	V4	30	DB5
8	V3	31	DB4
9	V2	32	DB3
10	V1	33	DB2
11	V0	34	DB1
12	VR	35	DB0
13	C2-	36	E_RD
14	C2+	37	RW_WR
15	C1-	38	RS
16	C1+	39	RESETB
17	C3-	40	CS2
18	C3+	41	CS1B
19	Vout	42	DISP
20	Vdd	43	CL
21	Vss	44	M
22	PS	45	FRS
23	MI	46	NC

### Mechanical Data

Item	Standard Value	Unit
Module Dimension	35.0x24.22	mm
Viewing Area	29.58x17.98	mm
Dot Size	0.18x0.23	mm
Dot Pitch	0.2x0.25	mm

### Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	-2.4	---	5.5	V
Input Voltage	VI	-0.3	---	VDD	V

Note : VSS=0 Volt, VDD=5.0 Volt.

### Electronical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	L level	0.8V <sub>DD</sub>	---	V <sub>DD</sub>	V
	VIO	H level	---	---	---	V
Supply Current	IDD	VDD=5V	---	---	---	mA
Recommended LC Driving Voltage for Normal Temp. Version module	VDD-V0	0°C	9.3	9.8	10.3	V
		25°C	7.9	8.4	8.9	
		50°C	7.0	7.5	8.0	
LED Forward Voltage	VF	25°C	---	---	---	V
LED Forward Current	IF	25°C	---	---	---	mA
EL Power Supply Current	IEL	Vel=110VAC;400Hz	---	---	---	mA

Graphic type