

To : _____

Specification of FDTC TFT-LCD module

NA19020-C262

Approval
Date : By :

This Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter "High Safety Required Use"), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. Fujitsu shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product without permission.

Specification No. : Tech Bes LCD-00067

Issue Date : Oct 10, 2003

Issued by : F. Yamada

F. Yamada
Director
Products Engineering Dept.
LCD Products Div.

FUJITSU DISPLAY TECHNOLOGIES CORPORATION

A

A

B

B

C

C

D

D

E

DATE	DOCUMENT CONTROL SECTION
------	--------------------------

Specification of TFT-LCD module

Model No. : NA19020-C262

						TITLE NA19020-C262			
						DRAW. NO. Tech Bes LCD-00067			
						CUST.			
02	20031010	M.Nishido	Y.Furukoshi	F.Yamada	Total Revision				
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
DESIG.			CHECK			FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
						1 /			

TABLE OF CONTENTS

A	1.APPLICATIONS.....	2	A
	2.PRODUCT NAME AND MODEL NUMBER		
	2-1.Product Name.....	2	
	2-2.Model Name.....	2	
	3.OVERVIEW	2	
	4.CONFIGURATION	2,3	
	5.MECHANICAL SPECIFICATIONS	3	
B	6.ABSOLUTE MAXIMUM RATINGS	4	B
	7.RECOMMENDED OPERATING CONDITIONS	4	
	8.ELECTRICAL SPECIFICATIONS	5,6	
	9.OPTICAL SPECIFICATIONS	7-11	
	10.INTERFACE SPECIFICATIONS		
	10-1.Signal descriptions.....	12	
	10-2.Color Data Assignment.....	13	
	10-3.Input Signal Timing.....	14,15	
	10-4.Correspondence between Data and Display Position.....	16	
C	10-5.Power Supply Sequence.....	16	C
	11.BACKLIGHT SPECIFICATIONS		
	11-1.Pin Configuration for Backlight.....	17	
	11-2.CCFL.....	17	
	11-3.Life.....	17	
	11-4.Lamp Assembly Set (for Replacement).....	17	
	12.APPEARANCE SPECIFICATIONS	18	
D	12-1.Appearance	18	D
	12-2.Dot defects	18	
	13ENVIRONMENTAL SPECIFICATIONS	18	
	14INDICATIONS	19	
	15PACKAGING		
	151.Packaging Specifications	19	
	152.Packaging Method.....	19-23	
	16PRECAUTIONS	24-27	
	17PRECAUTIONS FOR USE	27	
	18MISCELLANEOUS	27	E

DOCUMENT CONTROL SECTION

DATE

						TITLE					NA19020-C262					
						DRAW. NO.					CUST.					
						Tech Bes LCD-00067										
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					FUJITSU DISPLAY TECHNOLOGIES CORPORATION					SHEET	2 /
	DESIG.			CHECK			APPR.									

1. APPLICATION

This specification is applied to the 15.0 in. XGA supported TFT-LCD module.

2. PRODUCT NAME AND MODEL NUMBER

2-1 Product Name : LCD Module

2-2 Model Number : NA19020-C262

3. OVERVIEW

This LCD module has a TFT active matrix type liquid crystal panel 1024×768 pixels, and diagonal size of 38cm (15.0-inch). This module supports 1024×768 XGA mode (Non-interlace). This LCD has a digital RGB interface and can display 262,144 colors.

Timing control signal is “Data enable signal : ENAB” only. (Data enable mode)

Even and odd data are transmitted at the same timing in the interface, so data lines are 36. (R, G, B each 6 bit ×2) The signal level of this interface is +3.3V CMOS level or 5V TTL level.

The power supply of this LCD module is +5v DC single.

4. CONFIGURATION

This LCD module consists of a color TFT-LCD panel that is mounted with TFT driver ICs and a cold-cathode fluorescent tube back-light.


The inverter for the back-light is not included.

Figure 4-1 shows a block diagram of this LCD module.

DOCUMENT CONTROL SECTION

DATE

						TITLE	NA19020-C262			
						DRAW. NO.	Tech Bes LCD-00067			CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		Sheet	3 /	
DESIG.			CHECK		APPR.					

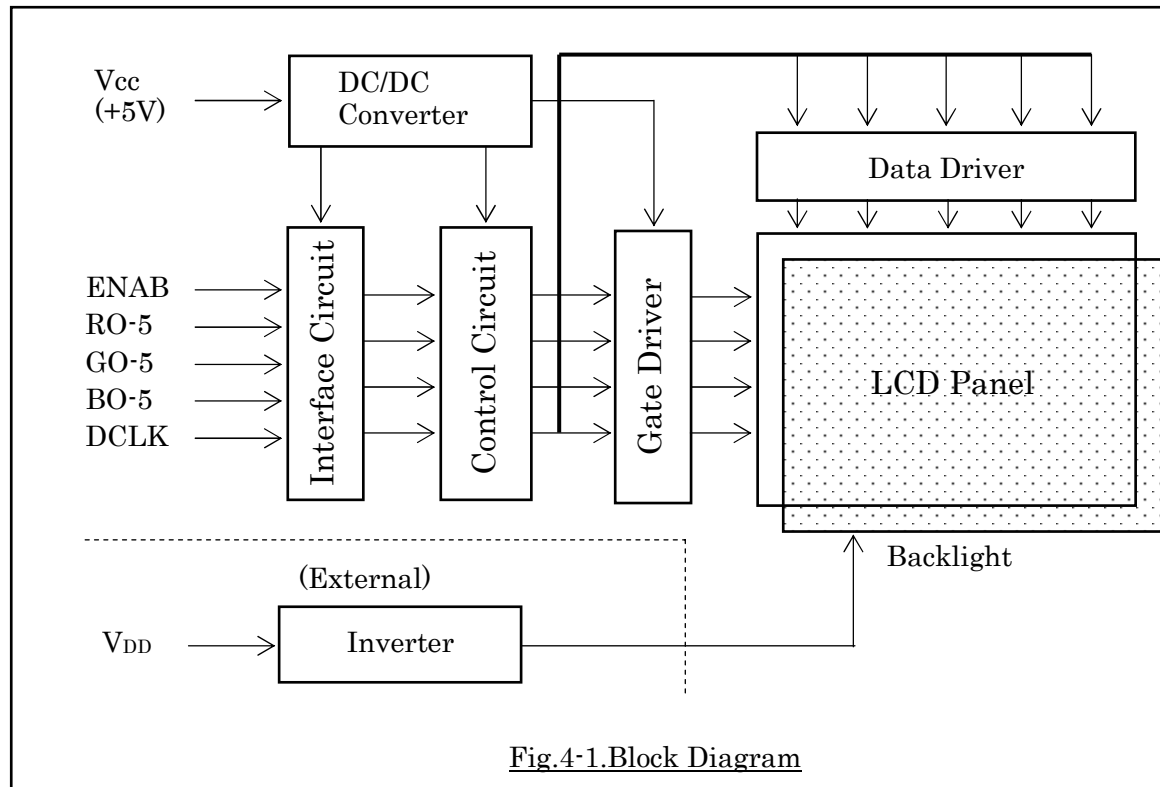

5. MECHANICAL SPECIFICATIONS

Table 5-1 shows the mechanical specifications of this LCD module.

Table 5-1. Mechanical Specifications

Item	Specifications	Unit	Remark
Dimensions	347.3×263.5×15.8(TYP.) (Excluding I/F Connector and fixing parts)	mm	Edge type backlight is used. (φ2.6 CCFL×4) Outward Appearance is shown at page 31 and 32.
Display Resolution	(1024×3) ×768	—	
Display Dot Area	304.1×228.1	mm	
Dot Pitch	(0.099×3) ×0.297	mm	
Aspect Ratio	1 : 1	—	
Weight	1,400typ, 1,600max	g	
FG-SG	Short circuit	—	

DOCUMENT CONTROL SECTION

DATE

TITLE NA19020-C262

DRAW. NO. Tech Bes LCD-00067

CUST.

EDIT DATE DESIG. CHECK APPR. DESCRIPTION

FUJITSU DISPLAY TECHNOLOGIES CORPORATION

Sheet 4 /

6. ABSOLUTE MAXIMUM RATINGS

Table 6-1 shows the absolute maximum rating of this LCD module.

Table 6-1. Absolute Maximum Ratings

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{CC}	Ta=25°C	-0.3	—	6.0	V
Input Voltage	V _{IN}	Ta=25°C	-0.3	—	V _{CC} +0.3	V

7. RECOMMENDED OPERATING CONDITIONS

Table 7-1 shows the recommended operating conditions of this LCD module.

Table 7-1. Recommended Operating Conditions

Item		Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage (Logic)		V _{CC}	4.75	5.0	5.25	V
Ripple Voltage	V _{CC}	V _{RP}	—	—	100	mV

						TITLE NA19020-C262	
						DRAW. NO. Tech Bes LCD-00067	
						CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK		APPR.		5 /

8. ELECTRICAL SPECIFICATIONS

Table 8-1 shows the electrical specifications of this LCD module.

Table 8-1. Electrical Specifications

Item		Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remark
Supply Current		I _{CC}	V _{CC} =+5.0±0.25V V _{SS} =0V DCLK=32.505MHz	—	380	800	mA	*1
“H” Level Logic Input Voltage		V _{IH}		2.3	—	V _{CC}	V	
“L” Level Logic Input Voltage		V _{IL}		V _{SS}	—	0.9	V	
Leak Current (Logic Input)		I _{IL}		-5	—	+5	μA	
Supply Rush Current		I _{SCC}		—	—	5.5	A	*2
Supply Rush Current Duration (1A excess)		T _{SCC}		—	—	0.4	ms	
Contrast Regulation VR		R _{VR}		0	—	100	kΩ	
BACK LIGHT *4	CCFL Turn on Voltage	V _s	f _L =50kHz, Ta=25°C	—	1324	1500	V _{rms}	
			f _L =50kHz, Ta=0°C	—	1324	1500		
	Lighting Voltage	V _L	f _L =50kHz I _L =7mA	550	580	610	V _{rms}	
	Lighting Frequency	f _L	V _L =580V _{rms}	40	50	60	kHz	
	Tube Current	I _L	f _L =50kHz V _L =580V _{rms}	6	7	8	mA	*4

- (*1) Typical current value is measured when color bar pattern is displayed at V_{CC}=5.0V.
Maximum current value is measured when 55/63 and 63/63 gray scale pattern every 2 pixel is displayed at V_{CC}=4.75V.
Without rush current.
- (*2) These items prescribe the rush current for starting internal DC/DC.
Charging current to capacitors of V_{CC} is not prescribed.
- (*3) Backlight specifications are valid when using a suitable inverter such as the “FLCV-07” of Fujitsu Limited.
- (*4) Tube current (I_L) shows the value of the current that is consumed at one lamp.
This LCD module has 4 lamps. Each 2 lamps are placed at upper and lower side of the display.
2 lamps are connected in parallel. Each low voltage terminals are bound into 1 line cable, which connected to the backlight connector.

DOCUMENT CONTROL SECTION

DATE

										TITLE	NA19020-C262		
										DRAW. NO.	Tech Bes LCD-00067		
												CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.						FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
	DESIG.			CHECK				APPR.				6 /	

A



B

C

C



D

D



E

F

						TITLE NA19020-C262													
						DRAW.NO. Tech Bes LCD-00067										CUST.			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION										FUJITSU DISPLAY TECHNOLOGIES CORPORATION	SHEET	7 /		
	DESIG.			CHECK				APPR.											

9. OPTICAL SPECIFICATIONS

Table 9-1 shows the optical specifications of this LCD module.

Table 9-1. Optical Specifications

Ta=25°C, Signal timing=Typ

Item		Symbol	Condition		Specifications			Unit	Remark	
					MIN.	TYP.	MAX.			Note
Visual Angle	Horizontal	$\theta_{L,R}$	CR≥10	$\theta_{U,D}=0^{\circ}$	80	—	—	deg		(1)(2)
	Vertical	$\theta_{U,D}$		$\theta_{L,R}=0^{\circ}$	80	—	—	deg		(3)(5)(6)
Contrast Ratio		CR	$\theta_{L,R,U,D}=0^{\circ}$		210	400	—	—	White/Black	(1)(2)(3)(5)
Response Time(ON) (B → W)		t_{on}	$\theta_{L,R,U,D}=0^{\circ}$	Ta=25°C	—	15	30	ms		(1)(4)(5)
				Ta=0°C	—	50	100	ms		
Response Time(OFF) (W → B)		t_{off}	$\theta_{L,R,U,D}=0^{\circ}$	Ta=25°C	—	10	25	ms		
				Ta=0°C	—	50	100	ms		
Brightness		I	$\theta_{L,R,U,D}=0^{\circ}$ V _{CC} =5V, I _L =7mA f _L =50kHz R*,G*,B* Signal =All “H”		200	250	—	cd/m ²	White*1	(1)(5)
Brightness Uniformity		ΔI			80	—	—	%		(1)(5)(7)
Chromaticity	W	x			0.283	0.313	0.343	—		
		y			0.299	0.329	0.359	—		
	R	x				(0.643)				
		y				(0.353)				
	G	x				(0.285)				
		y				(0.600)				
	B	x				(0.145)				
y		(0.126)								
LCD Panel Type					TFT Color					
Display Mode					Normally Black VA					
Wide Viewing Angle Technology					MVA					
Optimum Viewing Angle					— (symmetry)					(6)
Display Color					262,144 (6-bit color)					
Color of non-display area					Black					
Surface Treatment					Anti-glare(Haze value : 25%, 2H)					

(*1) Value at 15~20 minutes after lighting on.

(Note) • CS-1000 (MINOLTA Co., Ltd.) , Field=1°, L=500mm

• Back-light current=7mA, Dark room condition(1lux or less)

• Be careful that the luminance meter, which you use, may not be able to get correct brightness

If it's set correctly.

DOCUMENT CONTROL SECTION

DATE

						TITLE NA19020-C262			
						DRAW. NO. Tech Bes LCD-00067			CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
DESIG.				CHECK				8 /	

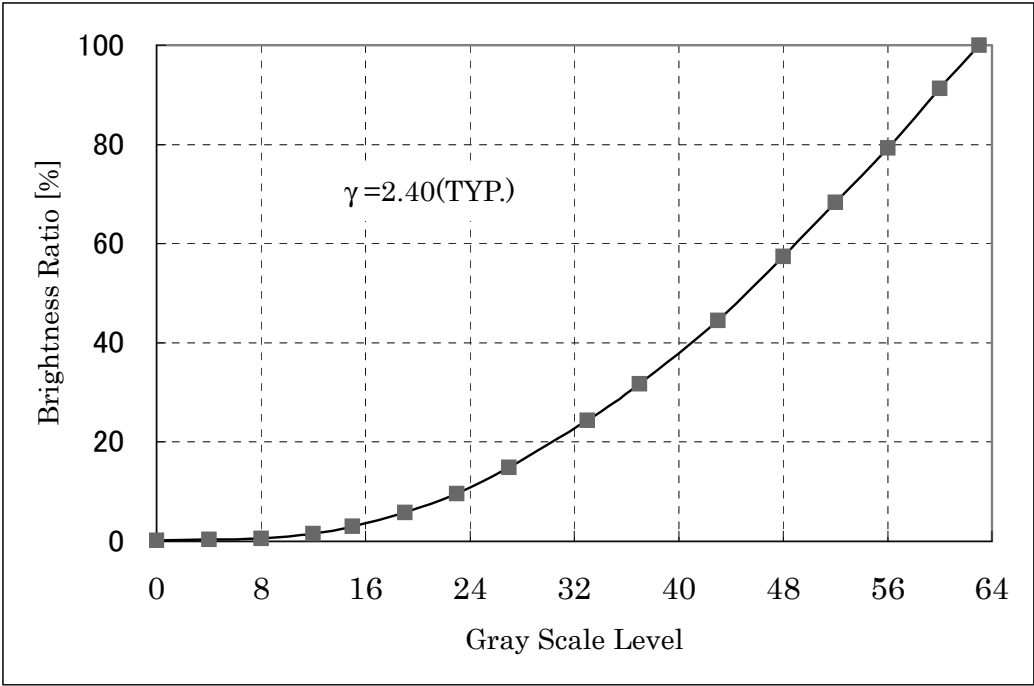


Fig.9-1. γ -Curve (Reference Value)

DATE	DOCUMENT CONTROL SECTION

						TITLE	NA19020-C262	
						DRAW. NO.	Tech Bes LCD-00067	CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	9 /	
DESIG.			CHECK		APPR.			

A



B

C



D


E

F

www.SpecLcd.com

Note 6) Definition of Optimum Viewing Angle


Based on Fig.9-7.

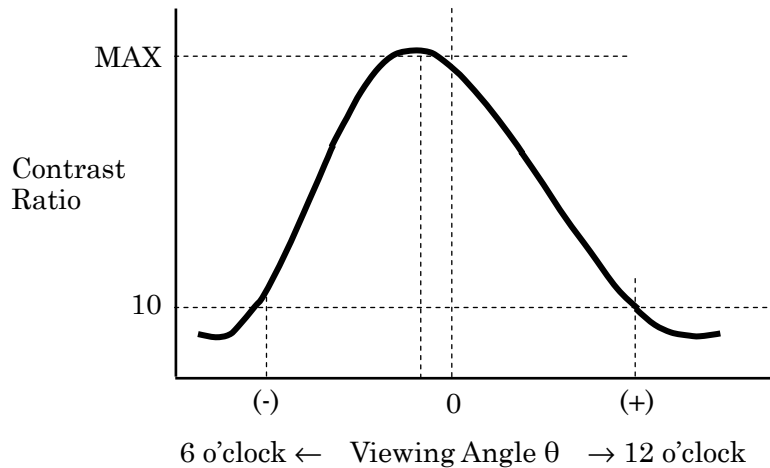Fig.9-7. Definition of Viewing AngleNote 7) Definition of Brightness Uniformity

Brightness uniformity is defined by the following formula.

Brightness (I1~I9) are measured at the following 9 points (① ~ ⑨) on the display area shown in Fig.9-8.

$$\text{Brightness Uniformity } (\Delta L) = \frac{|\text{Min. In}|}{|\text{Max. In}|} \times 100 (\%), n=1 \text{ to } 9$$

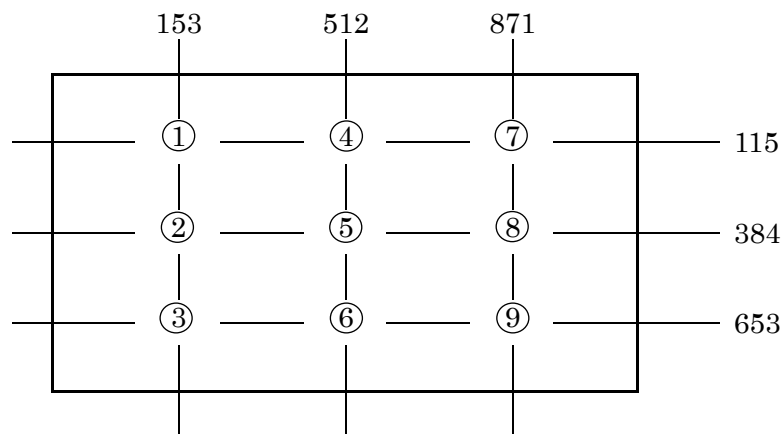

Note) Each measurement point (① ~ ⑨) defines the center spot of Brightness Meter view.
The tolerance of measurement position is $\pm 5\text{mm}$.

Fig.9-8. Measurement Points

DOCUMENT CONTROL SECTION

DATE

						TITLE	NA19020-C262		
						DRAW. NO.	Tech Bes LCD-00067		CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		12/	
DESIG.			CHECK		APPR.				

10. INTERFACE SPECIFICATIONS

10-1. Signal descriptions

Table 10-1 shows the description and configuration of Interface signals (CN1).


Table 10-1. Interface signals (CN1)

Pin No.	Symbol	I/O	Function	Pin No.	Symbol	I/O	Function
1	GND	—	Ground	31	GO1	I	Green odd data 1
2	RE0	I	Red even data 0	32	GO2	I	Green odd data 2
3	RE1	I	Red even data 1	33	GO3	I	Green odd data 3
4	RE2	I	Red even data 2	34	GO4	I	Green odd data 4
5	RE3	I	Red even data 3	35	GO5	I	Green odd data 5
6	RE4	I	Red even data 4	36	GND	—	Ground
7	RE5	I	Red even data 5	37	BO0	I	Blue odd data 0
8	GND	—	Ground	38	BO1	I	Blue odd data 1
9	GE0	I	Green even data 0	39	BO2	I	Blue odd data 2
10	GE1	I	Green even data 1	40	BO3	I	Blue odd data 3
11	GE2	I	Green even data 2	41	BO4	I	Blue odd data 4
12	GE3	I	Green even data 3	42	BO5	I	Blue odd data 5
13	GE4	I	Green even data 4	43	GND	—	Ground
14	GE5	I	Green even data 5	44	PULL	I	(*2)
15	GND	—	Ground	45	PULL	I	(*2)
16	BE0	I	Blue even data 0	46	ENAB	I	Data enable signal
17	BE1	I	Blue even data 1	47	GND	—	Ground
18	BE2	I	Blue even data 2	48	GND	—	Ground
19	BE3	I	Blue even data 3	49	DCLK	I	Dot clock signal
20	BE4	I	Blue even data 4	50	GND	—	Ground
21	BE5	I	Blue even data 5	51	GND	—	Ground
22	GND	—	Ground	52	SS	—	SS function ON/OFF (*1)
23	RO0	I	Red odd data 0	53	N.C.	—	—
24	RO1	I	Red odd data 1	54	GND	—	Ground
25	RO2	I	Red odd data 2	55	GND	—	Ground
26	RO3	I	Red odd data 3	56	GND	—	Ground
27	RO4	I	Red odd data 4	57	VDD	—	+5V Power supply
28	RO5	I	Red odd data 5	58	VDD	—	+5V Power supply
29	GND	—	Ground	59	VDD	—	+5V Power supply
30	GO0	I	Green odd data 0	60	VDD	—	+5V Power supply

(*1) SS (Spread Spectrum):SS function is ON when signal level is high or N.C..(generally set up N.C.)

SS function is OFF when signal level is low.

(*2).Connect it to GND for the protection of internal circuit.

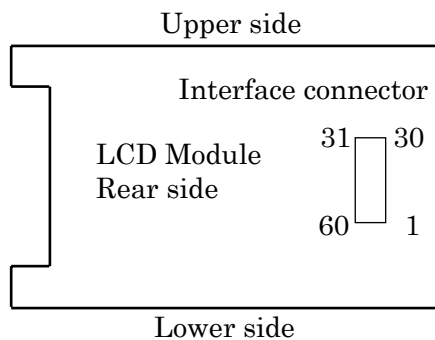

Connector : 52760-0600 (Molex)

User's connector : 53475-0600 (Molex)

DOCUMENT CONTROL SECTION

DATE

						TITLE	NA19020-C262	
						DRAW. NO.		CUST.
							Tech Bes LCD-00067	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	13/	

10-2. Color Data Assignment

Table 10-2 shows the color data assignment.

Table 10-2. Color Data Assignment

Color			R Input data							G Input data							B Input data						
	Odd		R05	R04	R03	R02	R01	R00	G05	G04	G03	G02	G01	R00	B05	B04	B03	B02	B01	B00			
	Even		RE5	RE4	RE3	RE2	RE1	RE0	GE5	GE4	GE3	GE2	GE1	GE0	BE5	BE4	BE3	BE2	BE1	BE0			
Basic Color	Black		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	Blue		0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1			
	Green		0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0			
	Cyan		0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1			
	Red		1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0			
	Magenta		1	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1			
	Yellow		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
	White		1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0			
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	1	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0			
	↑																						
	↓																						
	Brighter	61	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0			
	↓	62	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0			
	Red	63	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0			
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	1	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0			
	↑																						
	↓																						
	Brighter	61	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0			
	↓	62	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0			
	Green	63	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0			
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1			
	↑																						
	↓																						
	Brighter	61	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1			
	↓	62	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0			
	Blue	63	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1			

Note.1) Definition of gray scale : Color (n) ---"n" indicates gray scale level.

The gray scale is brighter as the number is larger.

Note.2) Data; 1: High, 0: Low

Note.3) Color data consist of 36 bits, namely, 6-bit odd and even data for each red, green and blue.
Optional data can be set to red, green and blue independently.
Therefore, the module is able to display 262,144 colors.

DOCUMENT CONTROL SECTION

DATE

TITLE

NA19020-C262

DRAW. NO.

Tech Bes LCD-00067

CUST.

EDIT

DATE

DESIG.

CHECK

APPR.

DESCRIPTION

FUJITSU DISPLAY TECHNOLOGIES CORPORATION

14/

DESIG.

CHECK

APPR.

10-3. Input Signal Timing

Table 10-3 and Fig.10-3 shows the input signal timing.

Table 10-3. Timing Characteristics

(T=0~50°C, Vcc=5±0.25V)

Item			Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK signal (Clock)	Period	Tc	25.000	30.764	40.000	ns	fc=1/Tc *1	
	Frequency	fc	25.000	32.505	40.000	MHz		
	Duty	Tch/Tc	45	50	55	%		
	High time	TclkH	5.0	—	—	ns		
	Low time	TclkL	5.0	—	—	ns		
	Rise time	Telkr	—	—	5.0	ns		
	Fall time	Tclkf	—	—	5.0	ns		
DCLK-Data Timing		Setup time	Tset	4.5	—	—	ns	40MHz
		Hold time	Thold	6.5	—	—	ns	40MHz
Data-ENAB timing	Horizontal	Period	Th	565	672	1566	DCLK	fh=1/Th
		Frequency	fh	38.6	48	60	kHz	
		Display period	Thd	—	512	—	DCLK	*2,3
	Vertical	Period	Tv	772	806	868	Th	16.67ms
		Frequency	fv	50	60	75	Hz	
		Display period	Tvd	—	768	—	Th	*2,3
	Data-ENAB timing		—	—	0	—	DCLK	*4

*1) DCLK signal input must be valid while power supply is applied.


*2) Display position is specified by the ENAB signal.

- Horizontal display position is specified by the rise of ENAB signal. The data of a horizontal line, which is latched by the falling edge of 1st DCLK right after the rise of ENAB, is displayed on the left edge of the screen.
- Vertical display position is specified by the rise of ENAB after a “Low” level period equivalent to eight times of horizontal period. The 1st data corresponding to one horizontal line after the rise of ENAB is displayed at the top line of screen.

*3) If a period of ENAB “High” is less than 512 DCLK or less than 768 lines, the rest of the screen displays black.

*4) The display position does not fit to the screen if the ENAB period and the effective data period do not synchronize with each other.

						TITLE	
						NA19020-C262	
						DRAW. NO.	CUST.
						Tech Bes LCD-00067	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK		APPR.		15/



11. BACKLIGHT SPECIFICATIONS

11-1. Pin Configuration for Backlight

Table 11-1(a) and 11-1(b) shows the description and pin assignment of the connectors (CN-A and B) for the Backlight of this LCD module.

Table 11-1(a) Pin Assignment of CN-A

Pin No	Signal	Function
1	VL1	Power supply for CCFL 1
2	VL2	Power supply for CCFL 2
3	NC	—
4	GND	Ground (for VL1, 2)

Table 11-1(b) Pin Assignment of CN-B

Pin No	Signal	Function
1	VL3	Power supply for CCFL 3
2	VL4	Power supply for CCFL 4
3	NC	—
4	GND	Ground (for VL3, 4)

Cable color (CN-A and B) : White at GND, Pink at VL1,2,3 and 4

Connector : Housing : BHR-04VS-1
 : Contact : SBH-001T-P0.5
 User's Connector : Post with base : SM04(4.0)B-BHS-1-TB
 Supplier : Japan Solderless Terminal Trading Company LTD. (J.S.T.)

11-2. CCFL

Supplier : SANKEN ELECTRIC CO., LTD Part No. KFN8319F315296Z

11-3. Life

The life of the backlight is a minimum of 50,000 hours at the following conditions.

(1) Working conditions

Ambient temperature : $25 \pm 5^{\circ}\text{C}$

Tube current(I_L) : (7mA or less)

(2) Definition of life

Brightness becomes 50% or below 50% of the minimum brightness value shown in Table 9-1.

The lamp cannot be lit by the breakdown voltage of 1500Vrms.

Lamp is flashing.

11-4. Lamp Assembly set (for replacement)

Lamp Assembly set (with charge) is prepared for maintenance.

This set consists of an upper lamp assembly and a lower lamp assembly.

Type number : FLCL-16S (for upper and lower)

						TITLE	NA19020-C262	
						DRAW. NO.	Tech Bes LCD-00067	CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	18/	
	DESIG.		CHECK		APPR.			

12. APPEARANCE SPECIFICATIONS

12-1 Appearance

No.	Item	Judgment method and standard	
1	Bright spot (high and Low)	≤ 8 dots	(Note 1)
2	Bright spot connection (high and low)	2 dots connection ≤ 2 pair 3 dots connection ≤ 1 pair	(Note 1)
3	Total of bright spot	≤ 8 dots	
4	Dark spot	≤ 18 dots	(Note 2)
5	Dark spot connection	2 dots connection ≤ 3 pair 3 dots connection ≤ 1 pair	(Note 2)
6	Total of dark spot	≤ 10 dots	(Note 2)
7	Total of dot defect	≤ 18 dots	
8	Distance of dot defect	≥ 2 mm	
9	Black / white spot	$D \leq 0.3$	Ignore
		$0.3 < D \leq 0.6$	$N \leq 5$
		$0.6 < D \leq 0.9$	$N \leq 2$ (Distance ≥ 100 mm)
		$0.9 < D$	0
10	Mura	Ignore	

D:Average diameter [mm], W:Width [mm], L:Length [mm], S=(bright spot size)/(dot size)

DOCUMENT CONTROL SECTION

DATE

						TITLE		NA19020-C262	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00067			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		19/	
DESIG.			CHECK		APPR.				

12-2 Dot defects (Bright spots, Dark spots)12-2-1 Zone

- Inside display dot area (304.1×228.1mm)
- Display dot area means active area.
- One pixel consists of 3 dots (red, green and blue).
- Foreign particle and scratch unharmed to display image, such as the foreign particle under polarizer film but outside of the display area and scratch on metal bezel, backlight module or polarizer film out of the display area, etc., are not counted.

12-2-2 Bright spots

(1) Bright spots by the defect of TFT.

- Visible under bias of 2% ND filter High bright spot R•G
- Visible under 5% but invisible under 2% ND filter Low bright spot R•G•B
- Invisible under bias of 5% ND filter Not counted

(2) Bright spots by the light passing through tears, breaks, etc in color filter.

- Exceed size of a half dot High bright spot
- A half dot or less Not counted

(3) Bright spots by the light passing through tears, breaks, etc in chromium mask.

- Exceed 50μm High bright spot
- 50μm or less Not counted

12-2-3 Test condition

- Inspector must observe the LCD screen from the normal direction under the illumination by a single 20W fluorescent lamp. The distance between the LCD screen and the inspector should be a height of 50cm above the worktable.
The vertical illuminance is 300 to 600lux (reference value).
- Bright spot should be counted under entire black screen.
- Dark spot should be counted under entire white screen.
- Input signal timing should be typical value.

(Note1) Please do not mistake a single bright spot for a bright spot connection due to Cs(supplemental capacitance) line at the center of each dot.

(Note2) If a pixel is dark partially, it connects into the number of dark spots in accordance with following rule.

- (a) $A < 1/3$: Not count. Only one of 4 dark connection is allowed.
 (b) $1/3 \leq A < 2/3$: Considered as 0.5 dot.
 (c) $2/3 \leq A$: Considered as 1 dot.
 (A=Dark spot size/dot size)

DOCUMENT CONTROL SECTION

DATE

						TITLE		NA19020-C262	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00067			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		20/
DESIG.			CHECK		APPR.				

13. ENVIRONMENTAL SPECIFICATIONS

Table 13-1 shows the environmental specifications.

Table 13-1. Environmental Specifications

Item	Condition		Remark
Temperature	Operation	0~50°C	Temperature on surface of LCD panel (display area.)
	Storage	-20~60°C	
Humidity	Operation	20~85%RH	Maximum wet-bulb temperature should not exceed 29°C. No condensation.
	Storage	5~85%RH	
Vibration	Non-operation	10~500Hz, 1 cycle/20minute, 2G, 1.5mm max, 2hour each X, Y and Z directions	For single module without package.
Shock	Non-operation	50G, 6ms, 1time each $\pm X$, $\pm Y$ and $\pm Z$ directions.	

NOTE: Table 13-2 and Fig. 13-1 show the shock resistance standard when module is packaged.

Table 12-2. Shock Resistance Standard when Module is Packaged

Dropping location	Dropping height	Count
A ~ J	60cm	1 time

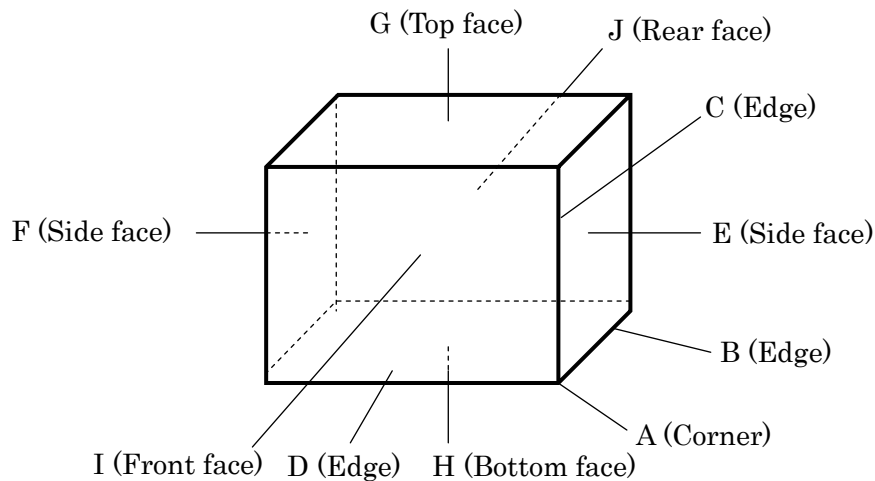


Fig.13-1. Direction to apply shock to package

DOCUMENT CONTROL SECTION

DATE

						TITLE	NA19020-C262	
						DRAW. NO.		
						Tech Bes LCD-00067	CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		
DESIG.			CHECK		APPR.		21/	

14. INDICATIONS

This module has the following indications.

(1) Product name : LCD unit

(2) Product drawing number : NA19025-C262

(3) Manufacturing number : 3 X 0 0 0 0 1

Serial number

(To be reset every month on 1st.)

Manufacturing month

(Oct. = X, Nov. =Y, Dec. =Z)

Last digit of manufacturing year.

(4) Disposal method of cold-cathode tubes. (See Fig.13-1)

(5) Caution when changing cold-cathode tubes. (See Fig. 13-2)

• THIS TFT COLOR LCD
CONTAINS COLD CATHODE
FLUORESCENT LAMPS. PLEASE
FOLLOW LOCAL ORDINANCES
OR REGULATIONS FOR ITS DISPOSAL.
• 当該液晶ディスプレイユニットには
蛍光管が組み込まれていますので、
地方自治体の条例または規則に従って
廃棄して下さい。



Fig.13-1

• WHEN CHANGING COLD CATHODE FLUO-
RESCENT LAMPS, FOLLOW OPERATING
SPECIFICATIONS. ESPECIALLY BE CAREFUL
ABOUT THE LAMPS SIDE-EDGE.
• 蛍光管の交換は作業仕様書に従っ
て行って下さい。特に蛍光管ホル
ダ側面のエッジに気をつけて下さ
い。



Fig.13-2

LCD unit



0X50015

NA19020-C262

Fig.13-3 Product label (example)

15. PACKAGING

Separately specified in packaging specifications.

15-1. Packaging specifications

(1) 5 LCD modules / 1 package.

(2) Weight: approximately 10kg / 1 package.

(3) Outline dimensions : 353mm (W)×268mm (D) ×462mm (H)

15-2. Packaging method

Fig.15-2 (a),(b),(c),(d) show the packing method.

DOCUMENT CONTROL SECTION

DATE

						TITLE	NA19020-C262		
						DRAW. NO.	Tech Bes LCD-00067		
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
DESIG.			CHECK		APPR.			22/	

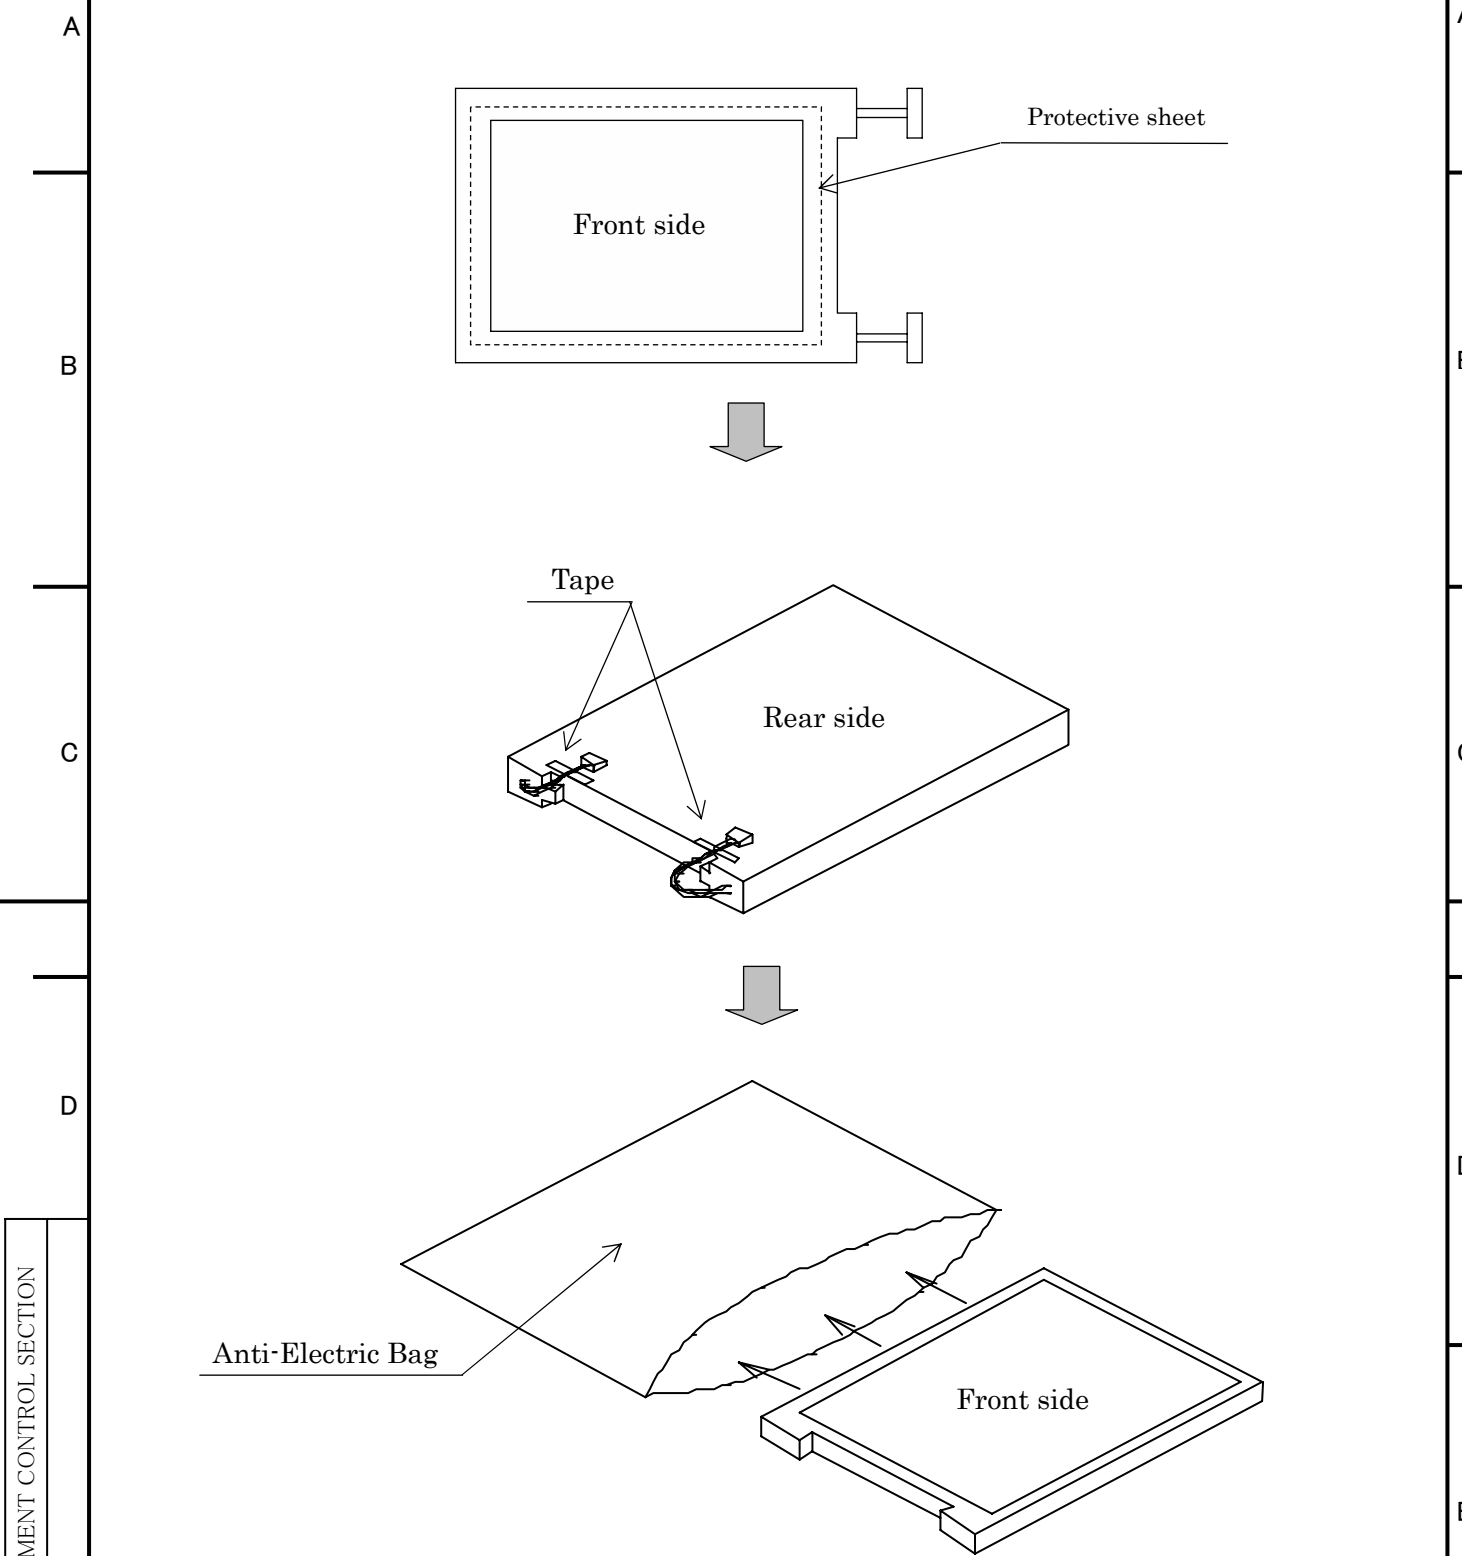
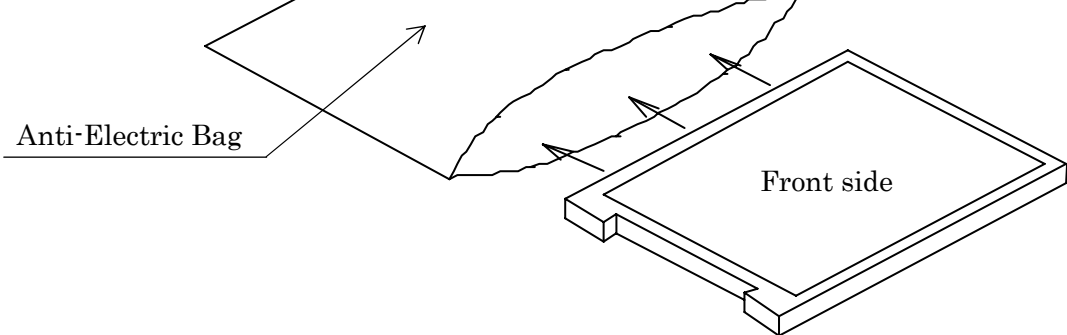


Fig.15-2(a) Packaging Method

DOCUMENT CONTROL SECTION											
	<u>Fig.15-2(a) Packaging Method</u>										
DATE						TITLE NA19020-C262					
						DRAW. NO.				CUST.	
						Tech Bes LCD-00067					
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					FUJITSU DISPLAY TECHNOLOGIES CORPORATION	Sheet 23/
	DESIG.			CHECK			APPR.				

A

A

B

B

C


C

D

D

E

F

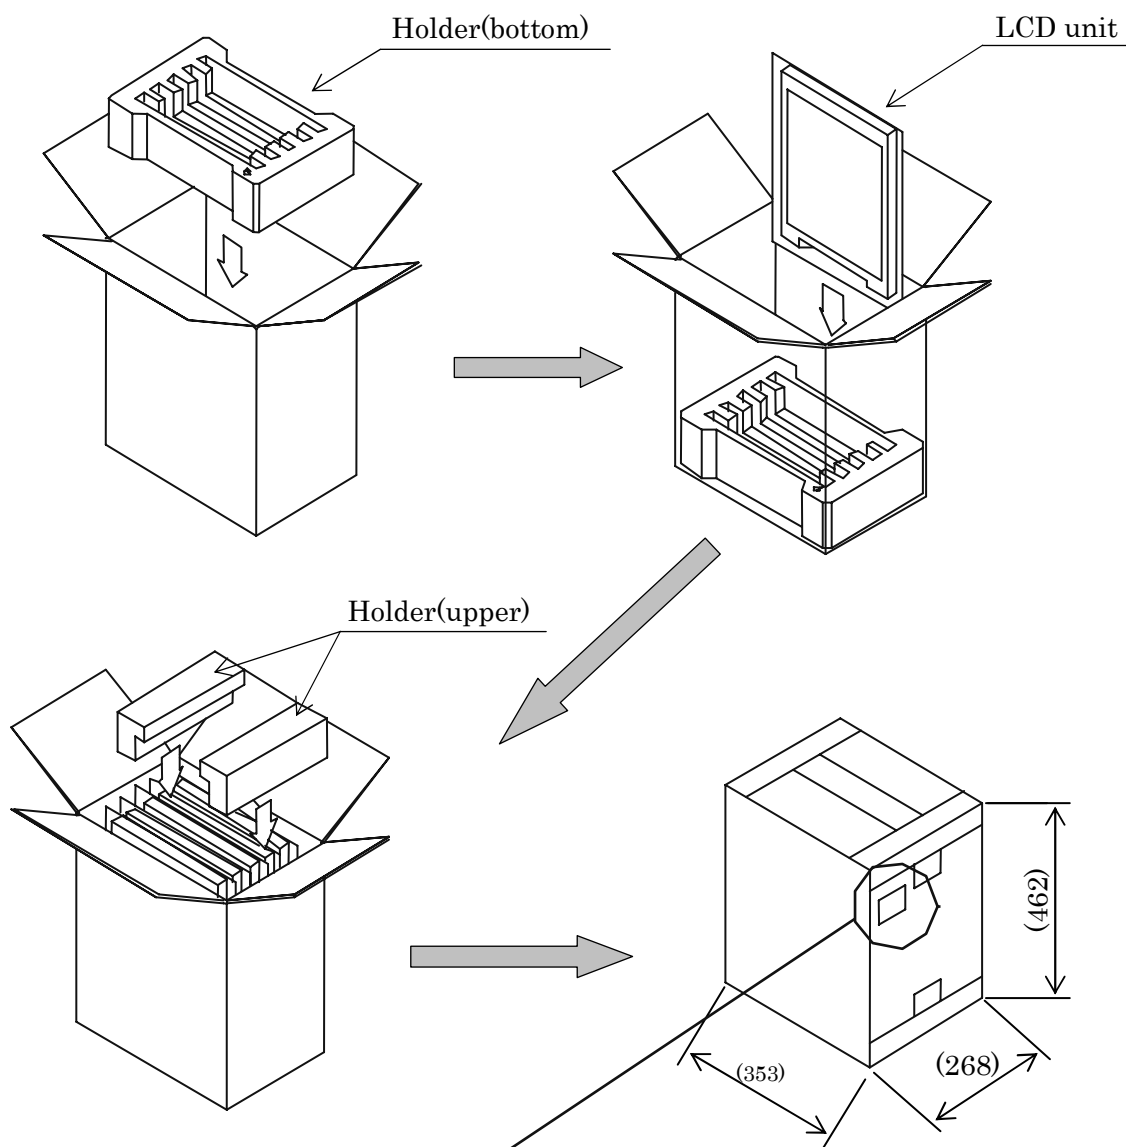

Label(example)

型 格 (TYPE)	数 量 (QTY.)	5
図 番	版 数	
(DRWG. NO.)	(REV. NO.)	
3900001		
3900002		
3900003		
3900004		
3900005		
バーコード		

- Taping
Upper : H or I method
Bottom : H method
- Upper and bottom holders should be anti-electrostatic type.

Fig.15-2(b) Packaging Method


DOCUMENT CONTROL SECTION

DATE

						TITLE		NA19020-C262	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00067			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		24/	
DESIG.				CHECK					



www.SpecLcd.com

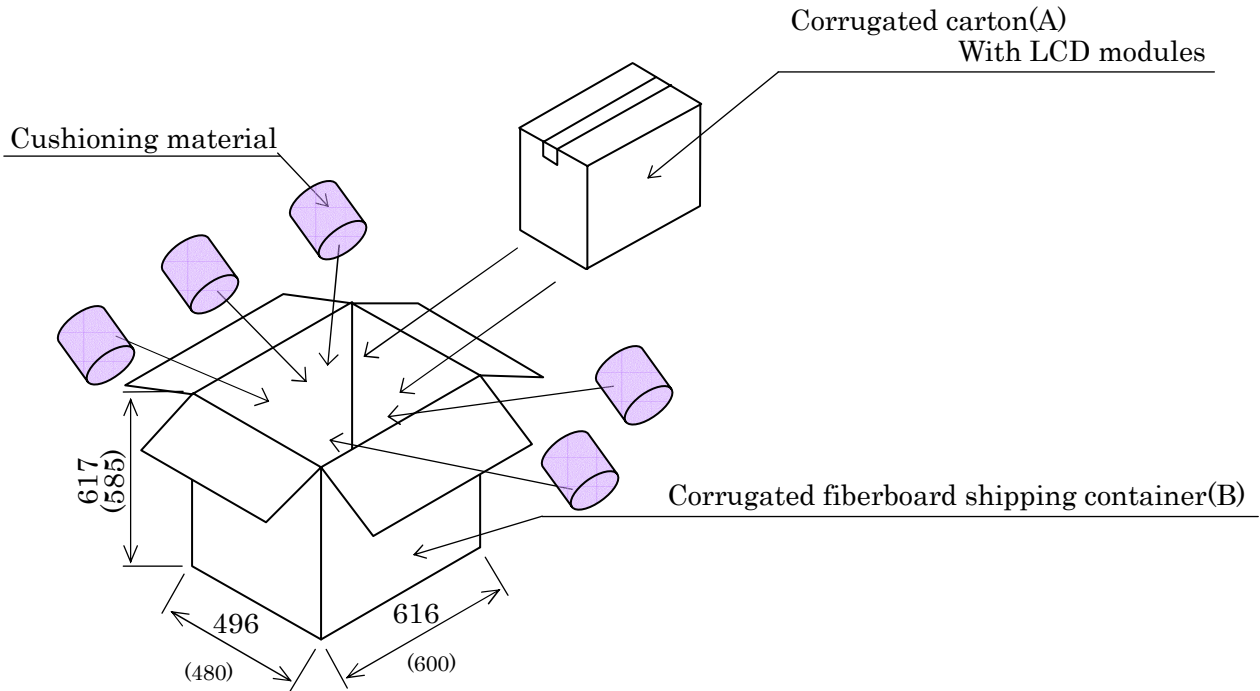

Note 1) The carton (A) should be placed in the middle of the container(B) with enough cushioning materials.

Note 2) The figures in () show inside measurements of the container(B).

Figure.15-2(d) Packaging Method

DOCUMENT CONTROL SECTION

DATE

						TITLE			NA19020-C262	
						DRAW. NO.			CUST.	
						Tech Bes LCD-00067				
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			26/	
DESIG.				CHECK		APPR.				

A

A

B

E

C

o

D

1

□

F

F

If this LCD module is disassembled or remodeled, it may have some trouble, or the display quality and reliability may not be assured.

If the LCD module is operated when condensation is on the terminals of the LCD panel, the terminals cause electrochemical reaction, and may reach disconnection. Condensation easily occurs especially when the module is moved from a cold environment to a warm environment.

- Storage at low temperature ($< -20^{\circ}\text{C}$) :The liquid crystal may solidify and become damaged.

If control signals (DCLK, or ENAB) are not input, or if the timing is out of the specified timing, DC voltage may be applied to the liquid crystal and, as a result, cause image sticking or deterioration of contrast.

						TITLE NA19020-C262								
						DRAW. NO.							CUST.	
						Tech Bes LCD-00067								
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION							FUJITSU DISPLAY TECHNOLOGIES CORPORATION	SHEET	28 /
	DESIG.			CHECK				APPR.						

A

A

B

B

C

C

D

D

F

DOCUMENT CONTROL SECTION

DATE _____

F

EDIT

DATE _____

DESIGN

G.	CHI
----	-----

ECK	A
-----	-----

APPR.

-

DE

DESCRIPTION

ON

	ELIITS
--	--------

SU DISPI

						TITLE NA19020-C262								
						DRAW. NO. Tech Bes LCD-00067							CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION							FUJITSU DISPLAY TECHNOLOGIES CORPORATION	SHEET	29 /
DESIG.			CHECK				APPR.							

(9) Others

If the LCD panel is damaged, do not inhale and do not swallow the liquid crystal.
If the liquid crystal adhere to the body or cloths, wash it off with soap immediately.
Follow regular precautions for electronic components.

Flux residue on the printed circuit board is harmless to the quality and reliability of LCD module.

FDTC has adopted non-wash technology on module assembly process.

18. PRECAUTIONS FOR USE

This Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter "High Safety Required Use"), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. If customer's product possibly falls under the category of High Safety Required Use, please consult with our sales representatives in charge before such use. In addition, FDTC shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product without permission.

19. MISCELLANEOUS


Specifications of the TFT-LCD panel and other components used in the LCD module are subject to change. Both parties shall discuss together before change.

If any doubt is raised in the content of the specifications, both parties shall discuss and make best effort for the agreement.


DOCUMENT CONTROL SECTION

DATE

						TITLE		NA19020-C262	
						DRAW. NO.		Tech Bes LCD-00067	
						CUST.			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		30/
DESIG.			CHECK			APPR.			



Commercial Tolerance														
FN111-12	Machining, Sheet metal working	Item	Dimension	0.5 30	120 or less	315 or less	1000 or less	2000 or less	FN111-10	Class ()				
		Center distance (metal)		±0.1	±0.1	±0.2	±0.3	±0.5	FN111-11	Metallic sinter, Aluminum alloy casting				
		Center distance (resin)		±0.1	±0.2	±0.4	±0.5	±0.7		Metal mold, Sand mold, Glass processing,				
		General dimensions (metal)								Iron casting, Copper alloy casting,				
				General dimensions (resin), Assembly dimensions, Bend dimensions (longitudinally 315 or less)		±0.2	±0.3	±0.5		±0.8	±1.2	FN111-13	Plastic mold	FN111-14
MATER.				FINISH										
									TITLE NA19020-C262			SCALE :		
									DRAW. NO. Tech Bes LCD-00067			CUST.		
EDIT.	DATE	DESIG.	CHECK	DESCRIPTION					FUJITSU DISPLAY TECHNOLOGIES CORPORATION					
DESIG.			CHECK				APPR.		31 /			SHEET		

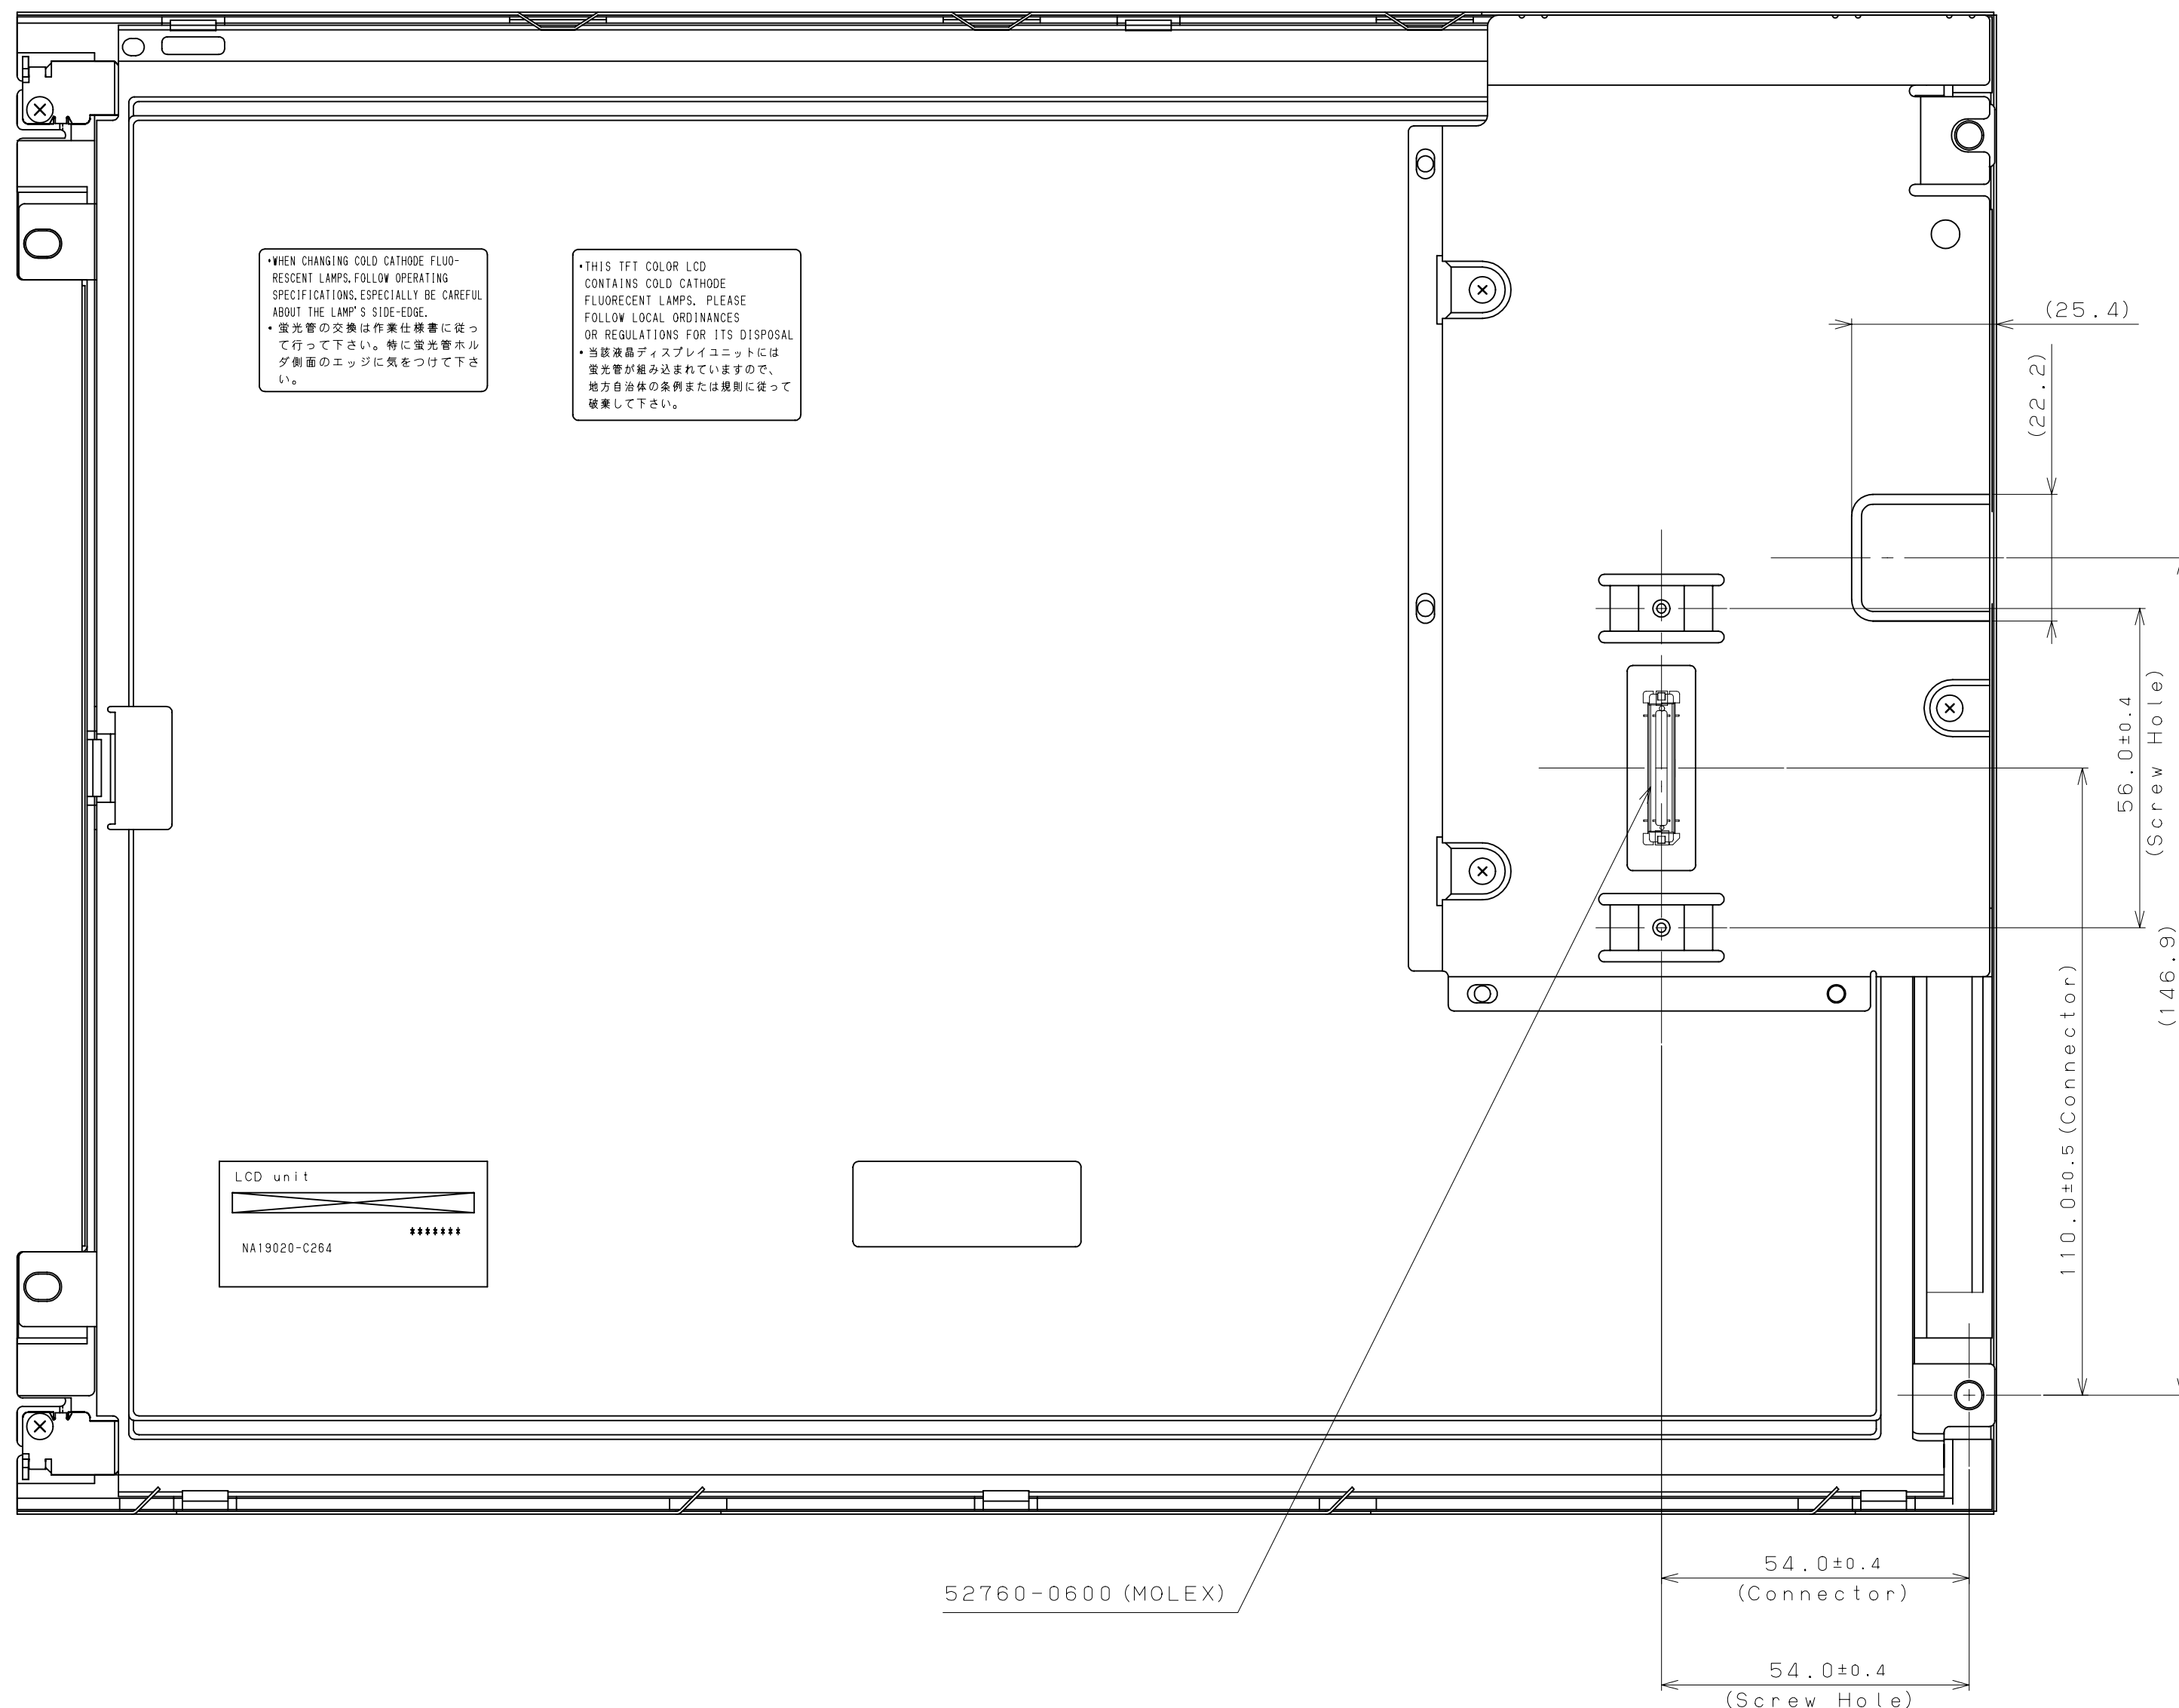

52760-0600 (MOLEX)

Rear View

		Commercial Tolerance										Class ()			
		Item	Dimension	0.5 30	120 or less	315 or less	1000 or less	2000 or less	5000 or less	10000 or less					
FN111-12	Machining, Sheet metal working	Center distance (metal)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.7	±1.0	±1.5	±2.0	FN111-11	Metallic sinter, Aluminum alloy casting (Metal mold, Sand mold), Glass processing, Iron casting, Copper alloy casting, Rubber forming, Rubber processing, Sponge forming, Sponge processing		
		Center distance (resin)	±0.1	±0.2	±0.4	±0.5	±0.7	±1.0	±1.5	±2.0					
		General dimensions (metal)	±0.1	±0.2	±0.4	±0.5	±0.7	±1.0	±1.5	±2.0					
		General dimensions (resin), Assembly dimensions, Bend dimensions (longitudinally 315 or less)	±0.2	±0.3	±0.5	±0.8	±1.2	±1.5	±2.0	±2.5	±3.0	FN111-13		Plastic mold	
		General dimensions (metal)	±0.1	±0.2	±0.4	±0.5	±0.7	±1.0	±1.5	±2.0					
General dimensions (resin), Assembly dimensions, Bend dimensions (longitudinally 315 or less)		±0.2	±0.3	±0.5	±0.8	±1.2	±1.5	±2.0	±2.5	±3.0					
MATER.		FINISH										Die cast			
		TITLE										SCALE			
		NA19020-C262													
		DRAW. NO.										CUST.			
		Tech Bes LCD-00067													
EDIT	DATE	DESIG.	CHECK	DESCRIPTION								FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
DESIG.			CHECK		APPR.							32 / 32			