



1. CONFIGURATION & DIMENSIONS :

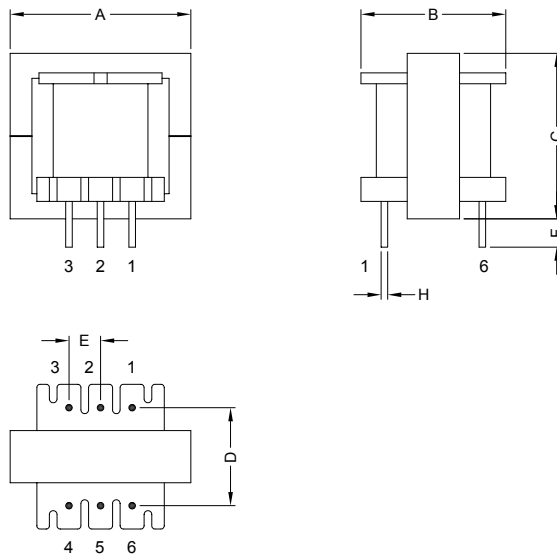

Unit:m/m

A	B	C	D	E	F	H
14.00 Max.	13.00 Max.	13.00 Max.	8.50±0.30	2.50±0.30	5.00±0.50	Ø0.60 Ref.

2. SCHEMATIC :

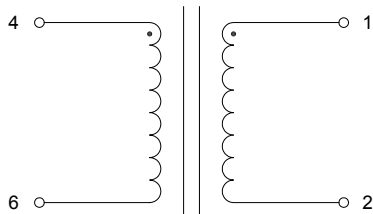

3. SCHEMATIC :

- Bobbin : Phenolic
- Core : EE16
- Wire : Polyurethane DD (2UEW)
- Tape : Polyester Film
- Varnish : Synthite AC-43



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SEEB6VTF-50458	L : (4-6) = 3.54mH±10%	-	10KHz 0.1V	(4-6) = 4.30Ω Max.
				(1-2) = 0.15Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD