



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: May, 30, 2008

Product Name: SAW Filter 915.3 MHz SMD 3.8X3.8 mm

TST Parts No.: TA0832A

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 5, 30, 2008



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 915.3 MHz

MODEL NO.:TA0832A

REV. NO.:2

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -20°C to +75°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS: (Ambient temperature : 25°C)


Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	915.3	-	-
Insertion Loss at Fc IL	dB	-	1.3	3.5	-
Lower 3 dB Band Edge	MHz	-	901	904.4	-
Upper 3 dB Band Edge	MHz	926.2	928.5	-	-
Amplitude Variation (904.4 ~ 926.2 MHz)	dB	-	1.5	3	-
Group Delay Variation (904.4 ~ 926.2 MHz)	ns	-	35	80	-
Attenuation (Reference level from IL)					
200 ~ 888.3 MHz	dB	35	43	-	-
888.3 ~ 894 MHz	dB	15	21	-	-
942.3 ~ 1400 MHz	dB	40	46	-	-
Temperature Coefficient of Frequency	Ppm/°C	-	-36	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

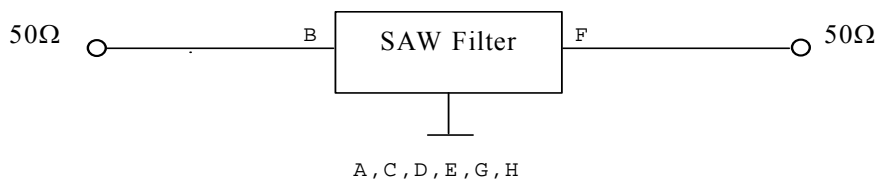


D.OUTLINE DRAWING:


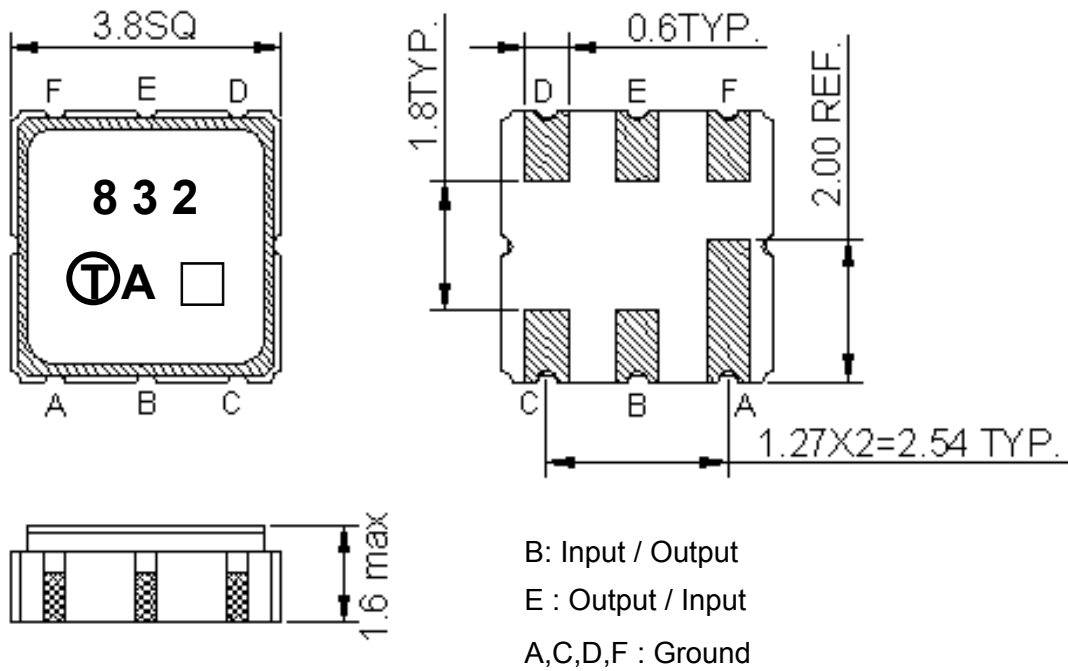


□ : Date Code (Follow the table provided by planner each year.)

E. PCB Footprint:


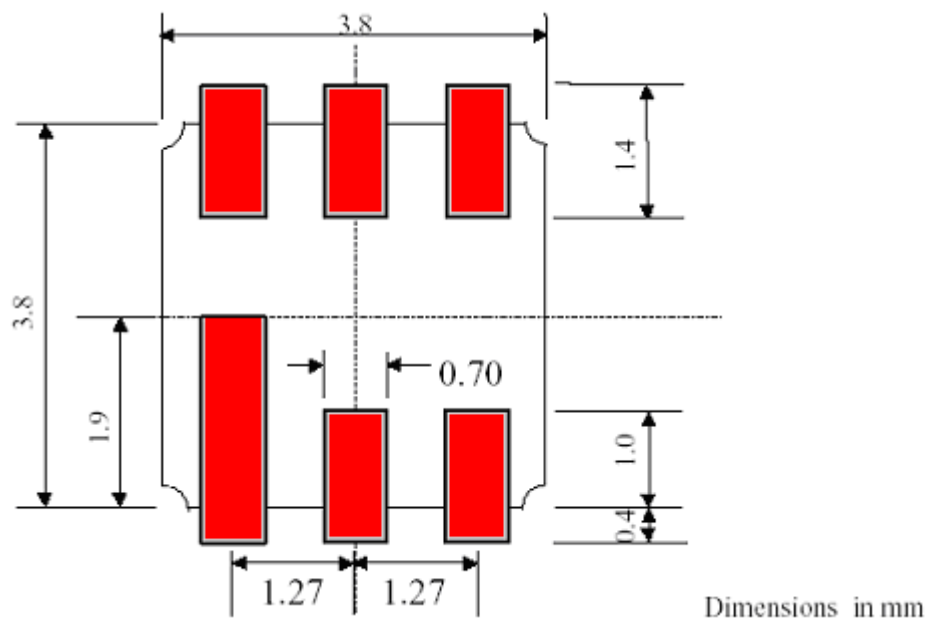


F. Frequency Characteristics :

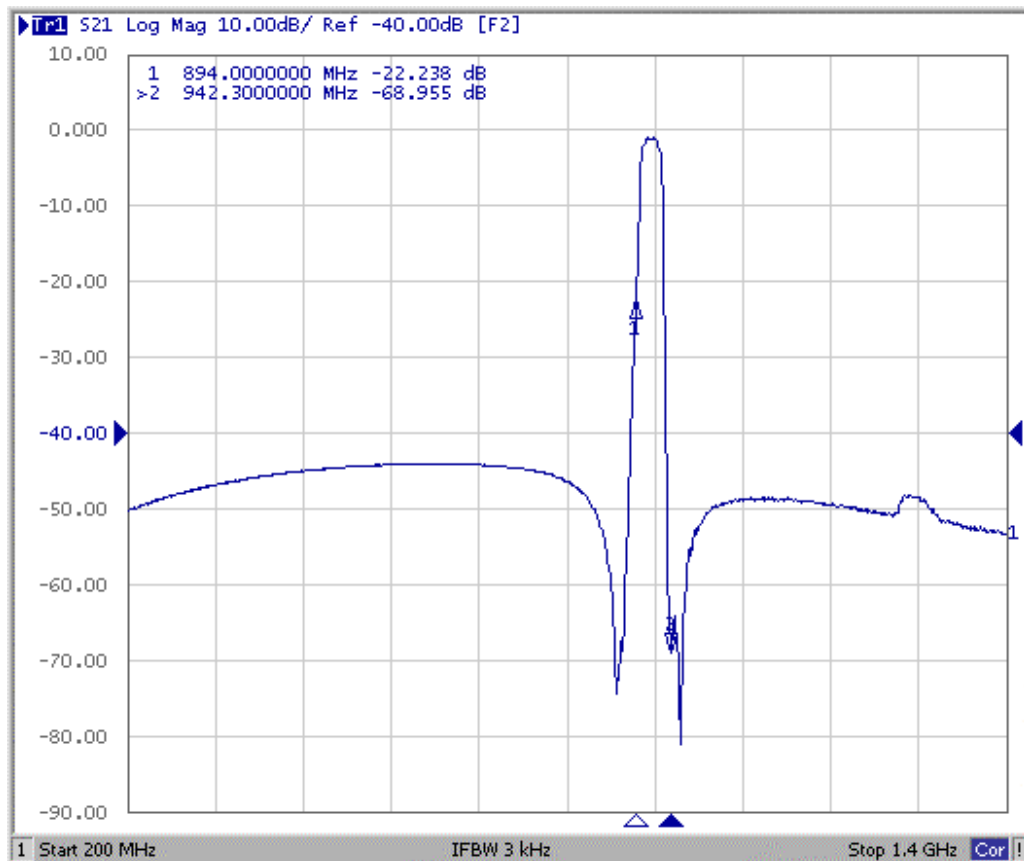
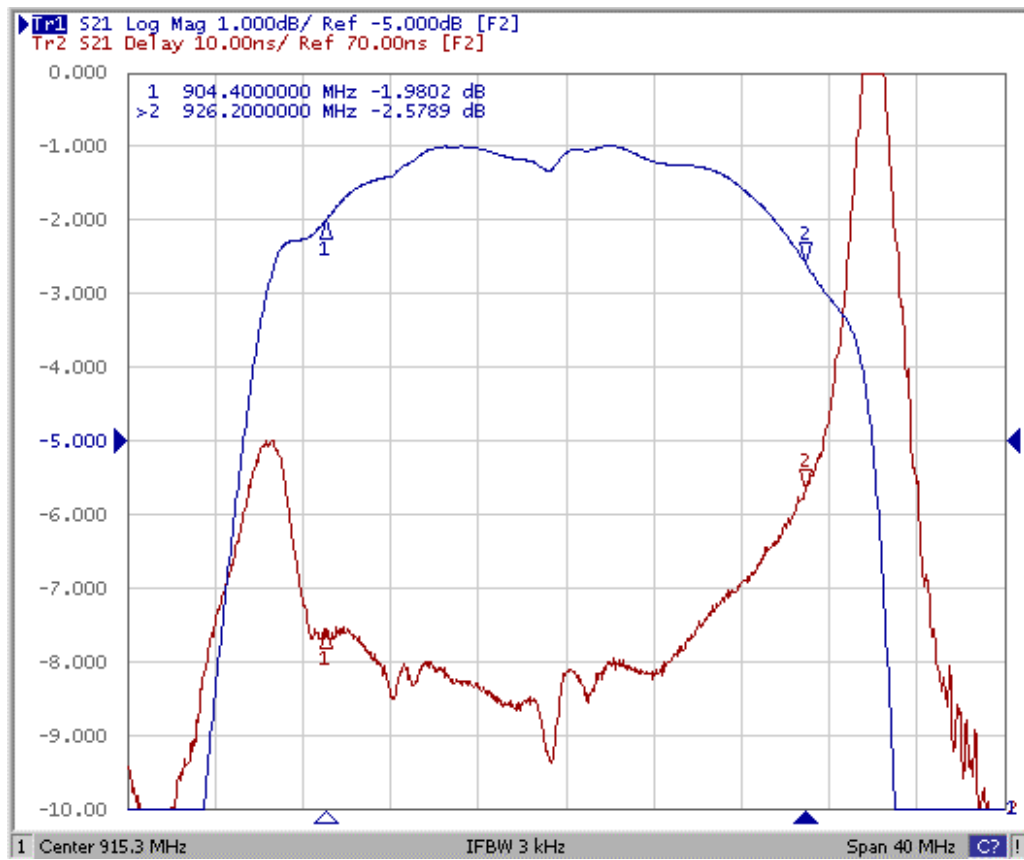


Reflection Functions :

S11

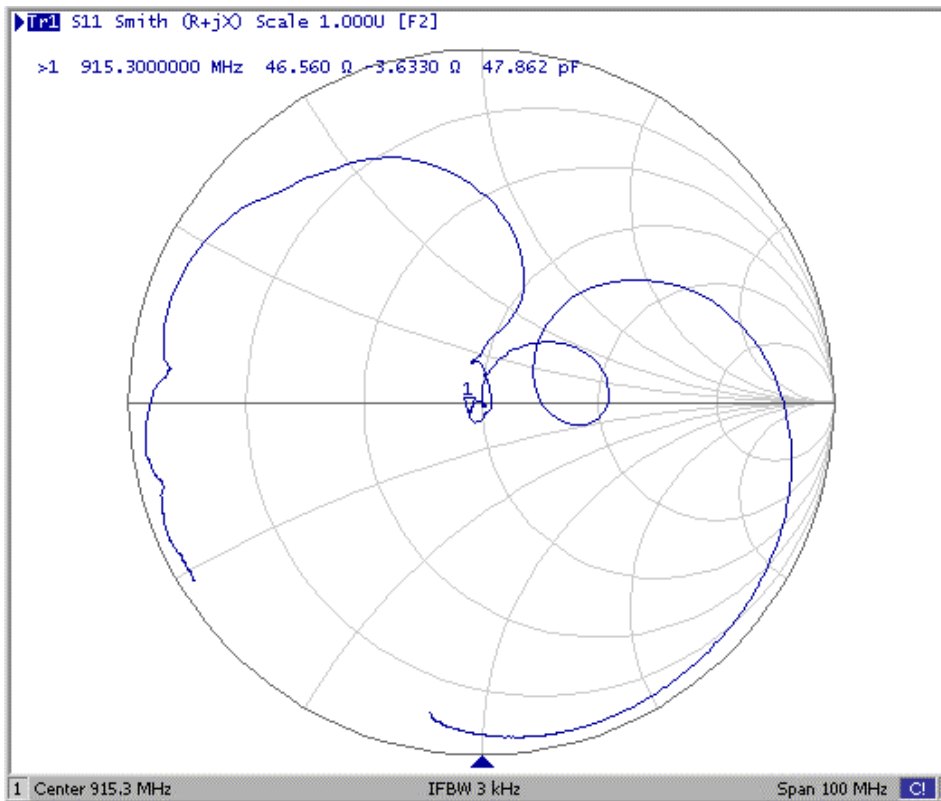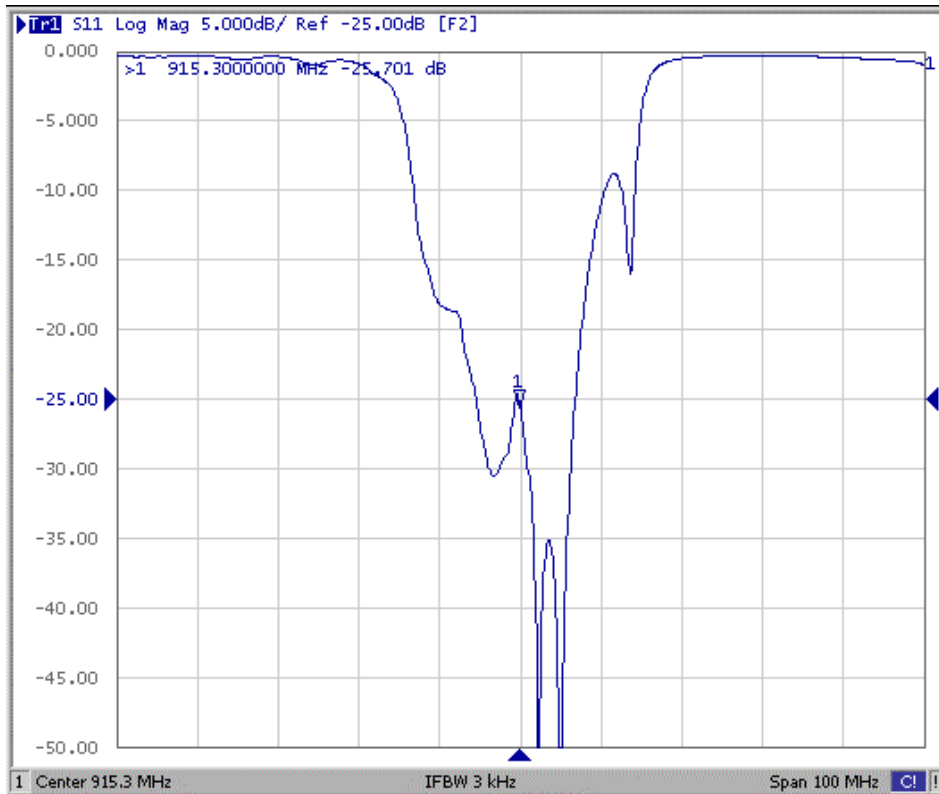


S22

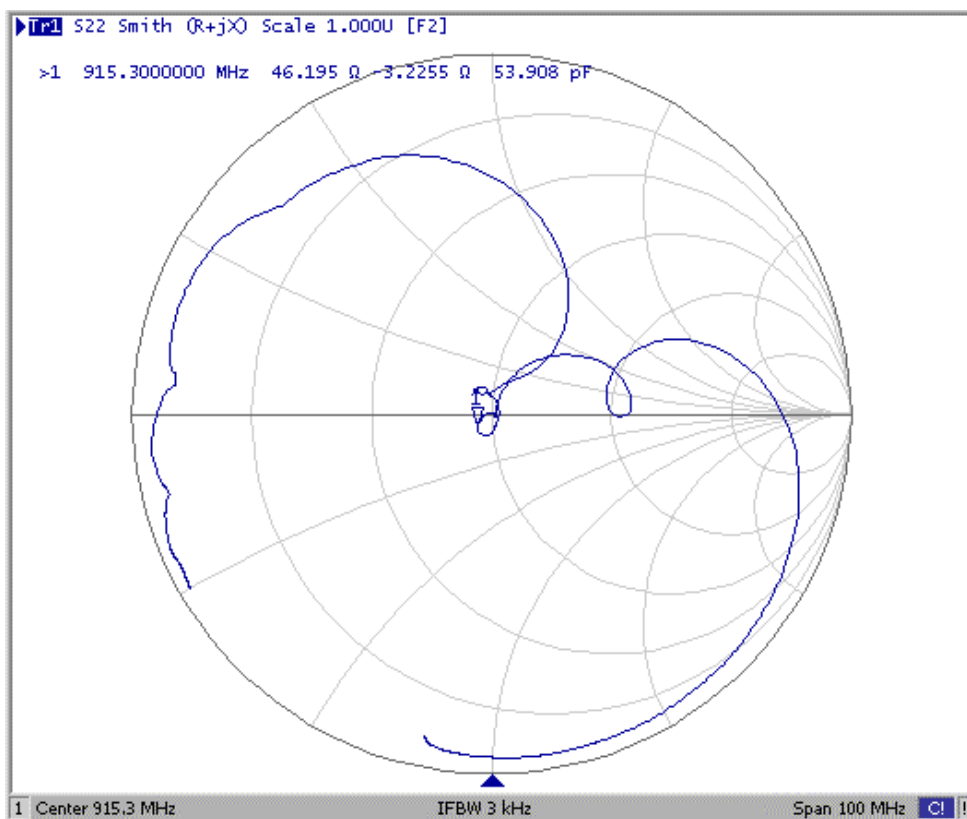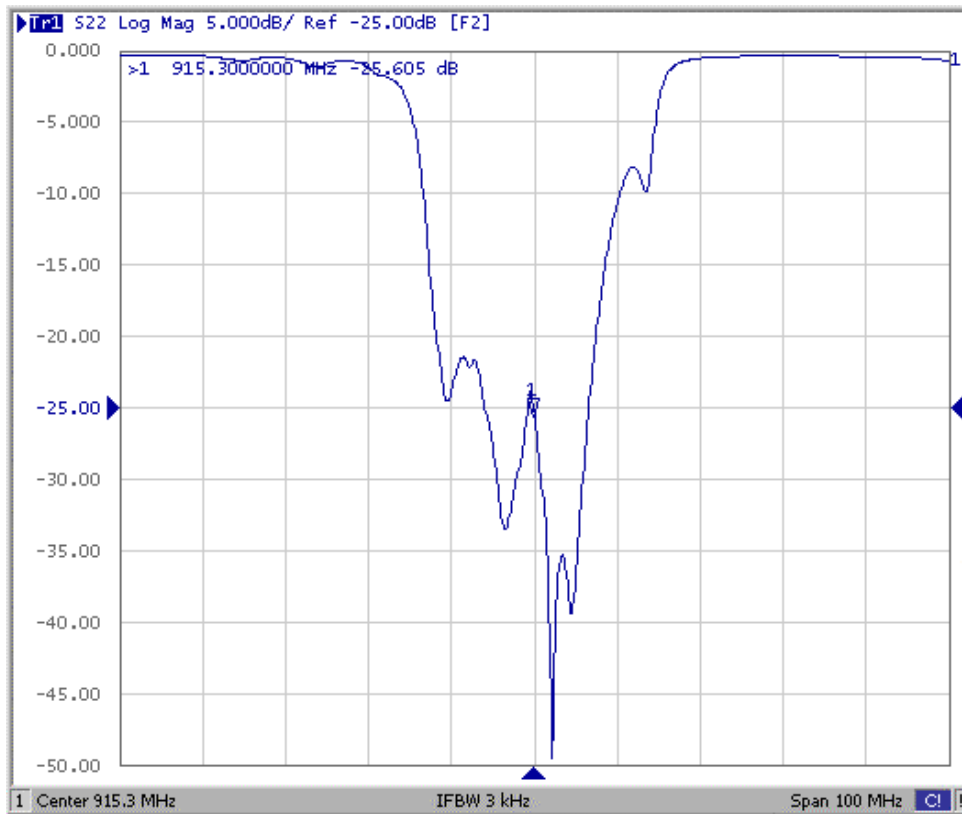


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=1000 ; 13"=3000)

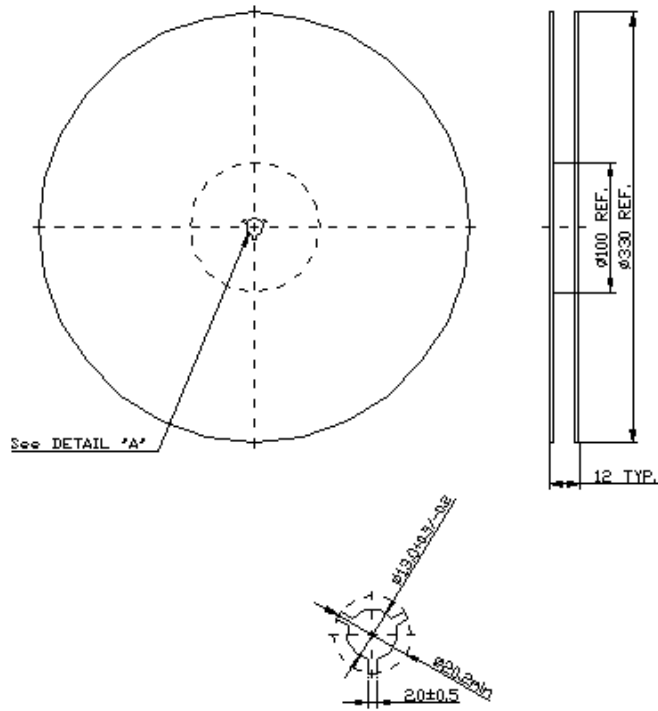


2. TAPE DIMENSION

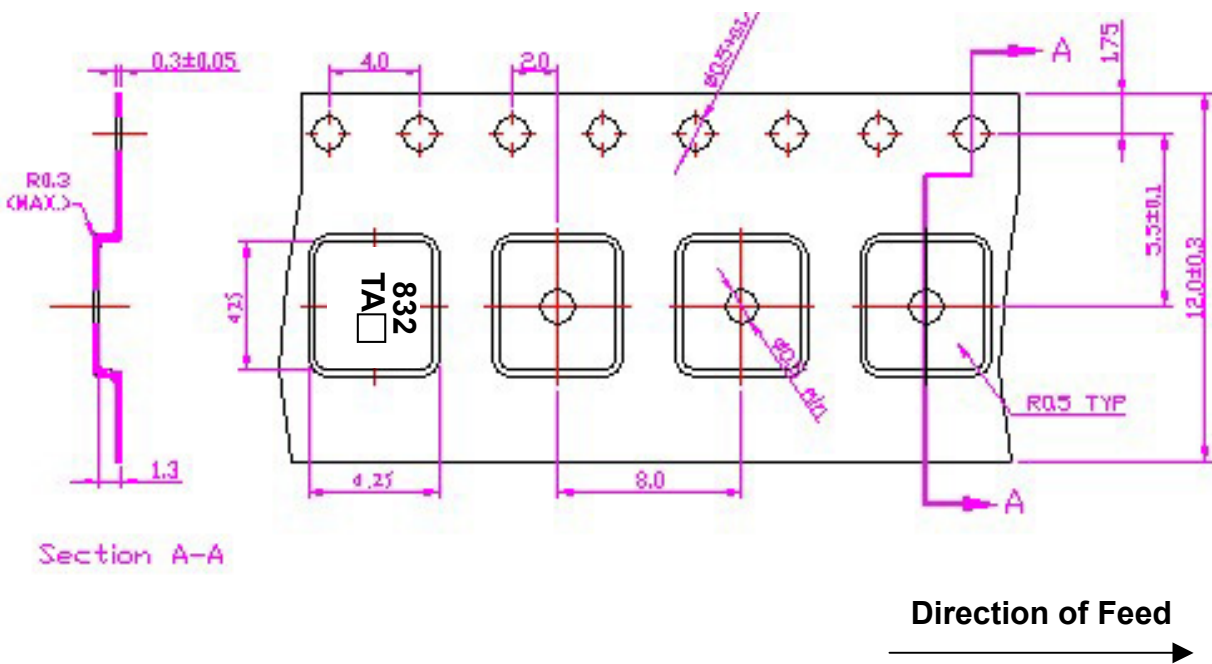

Section A-A

Direction of Feed



H. RECOMMENDED REFLOW PROFILE :

