



FIBER OPTIC TRANSMITTING MODULE

■ FEATURES

- 1) Conform to EIAJ standard CP-1201 (For Digital audio interfaces including fiber optic inter-connections).
- 2) TTL interface.
- 3) LED is driven by differential circuit.
- 4) +2.7V ~ +5.5V single power supply.
- 5) High speed signal transmission (12.5M NRZ signal).
- 6) ESD tolerance IC > 8KV.

■ APPLICATIONS

- 1) Digital audio equipment.
- 2) Navigation system.

■ MAXIMUM RATINGS (Ta=25 °C)


Characteristic	Symbol	Rating	Units
Supply Voltage	V _{CC}	-0.5 to 7	V
Input Voltage	V _{IN}	-0.5 to V _{CC} +0.5	V
Operating Temperature	T _{opr}	-20 to 70	°C
Storage Temperature	T _{stg}	-30 to 80	°C

**■ RECOMMENDED OPERATING CONDITIONS AND ELECTRICAL CHARACTERISTICS (T_a = 25 °C , V_{cc} = 5V)**

Characteristic	Symbol	Condition	Min	Typ	Max	Units
Operating Voltage	V _{cc}		2.7	3	5.5	V
Operating Current	I _{op}		-	8	13	mA
Transmitter Wavelength	λ _p		-	660	-	nm
Transmitter Light Power	P _f	*1	-21	-	-15	dBm
Data Rate	T	NRZ Code *2	DC	-	12.5	Mb/s
Pulse Width Distortion	Δt _w	Pulse width 80ns Pulse cycle 160ns, CL=10pF Using APRX179	-25	-	25	ns
Jitter	Δt _j		-	4	25	ns
Low to High Delay Time	t _{PLH}		-	100	180	ns
High to Low Delay Time	t _{PHL}		-	100	180	ns
High Level Input Voltage	V _{IH}		2.0	-	-	V
Low Level Input Voltage	V _{IL}		-	-	0.8	V
High Level Input Current	I _{IH}		-	-	20	μA
Low Level Input Current	I _{IL}		-	-	-0.4	mA


*1: Fiber insertion measure peak value.

*2: For data rate > 12Mb/s(NRZ), the duty factor must be such as kept 25 to 75%.

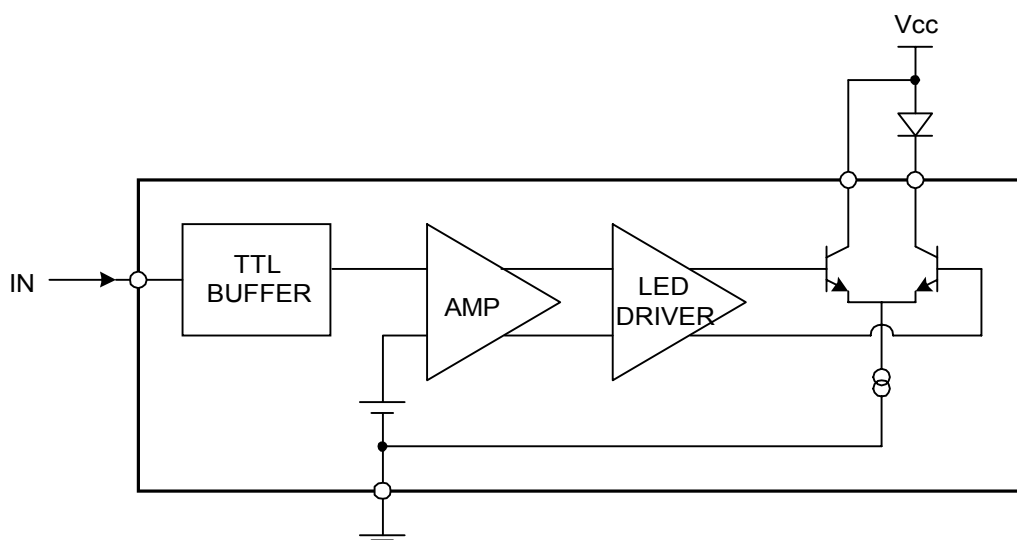■ BLOCK DIAGRAM



■ TEST CIRCUIT

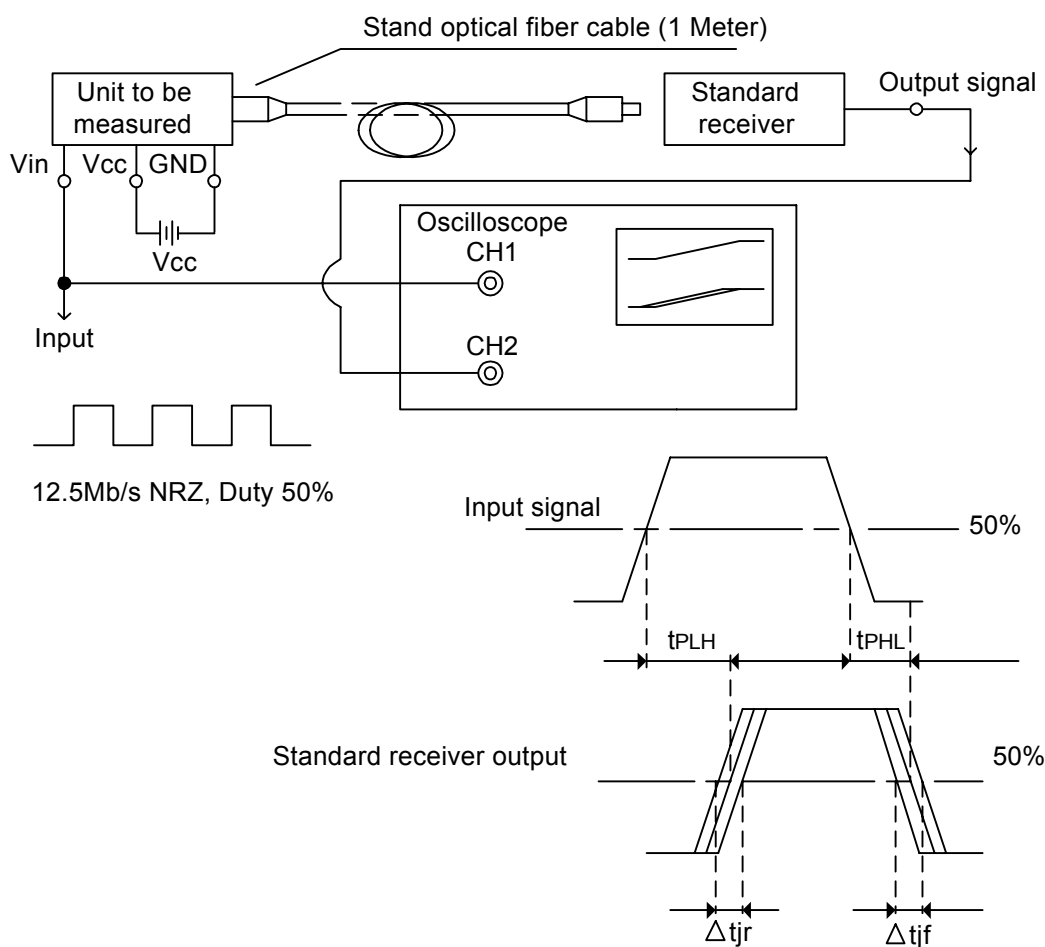

■ COMMENTS

No.	Test Item	Symbol
1	Low to High Pulse Delay Time	t_{PLH}
2	High to Low Pulse Delay Time	t_{PHL}
3	Pulse Width Distortion $\Delta tw = t_{PHL} - t_{PLH}$	Δtw
4	High Level Output Voltage	V_{OH}
5	Low Level Output Voltage	V_{OL}



■ APTX179M OUTLINE DIMENSION **Unit: mm**

