


Piezo Buzzer (DC)




CPB3626-R


| Canopus Part no. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max Rated Current (mA) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Tone Nature | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|-------------------------|---------------------|------------------------|------------------------|-------------------------|-------------|----------------------------|---------|------------|
| CPB3626JC29TG | 5 ~ 32 | 30 | 60 | 90 at 61cm | 2900 ± 500 | Continuous | -20 ~ +60 | PBT | 35 |

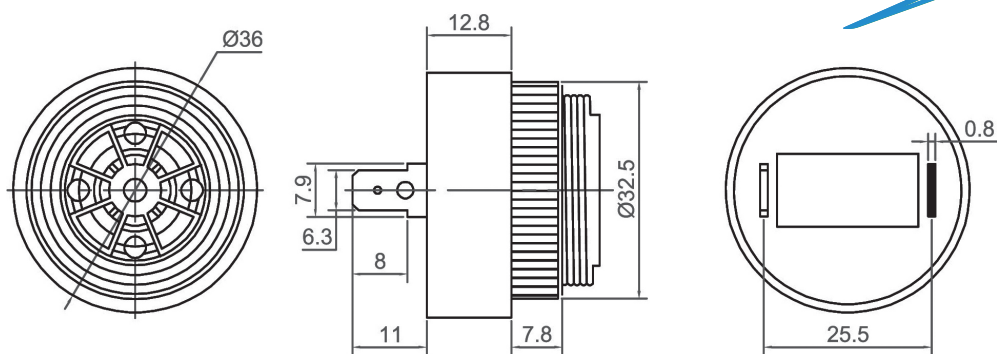

CPB3635

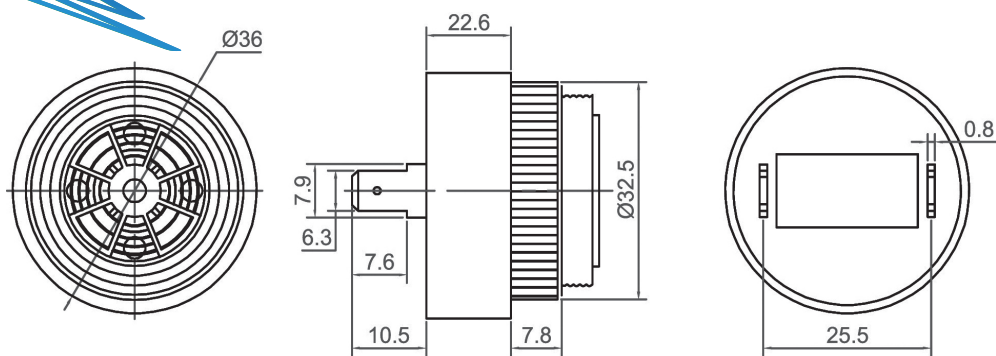

| Canopus Part no. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max Rated Current (mA) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Tone Nature | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|-------------------------|---------------------|------------------------|------------------------|-------------------------|-------------|----------------------------|---------|------------|
| CPB3635HM22TG | 4 ~ 18 | 12 | 85 | 95 at 60cm | 2200 ± 500 | Siren | -20 ~ +70 | PBT | 35 |
| CPB3635JM22TG | 6 ~ 28 | 28 | 85 | 95 at 61cm | 2200 ± 500 | Siren | -20 ~ +70 | PBT | 35 |

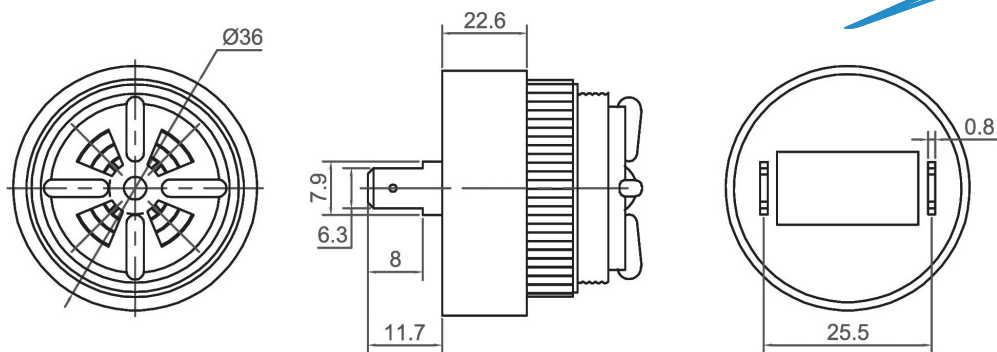

CPB3640

| Canopus Part no. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max Rated Current (mA) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Tone Nature | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|-------------------------|---------------------|------------------------|------------------------|-------------------------|-------------|----------------------------|---------|------------|
| CPB3640GM22TG | 5 ~ 15 | 9 | 50 | 105 at 10cm | 2200 ± 300 | Siren | -20 ~ +60 | PBT | 35 |

CANOPUS

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216