

GaAs IC SPST Switch With Integral Driver

Low Loss Reflective DC–6 GHz



AK006L1-01, AK006L1-10


Features

- Integral Driver ± 5 V Supply Voltages
- Low Insertion Loss, Reflective
- 7 Lead Hermetic Package
- Capable of Meeting MIL-STD Requirements⁸

Description

The AK006L1-01 is a GaAs IC FET SPST low loss switch with integral driver. This device is useful as a modulator and a switch in high reliability and commercial applications. The integral driver simplifies the external driver circuit, thus saving PC board space and reducing component count. The AK006L1-10 is the gullwing version of this device for surface mount applications.

-01

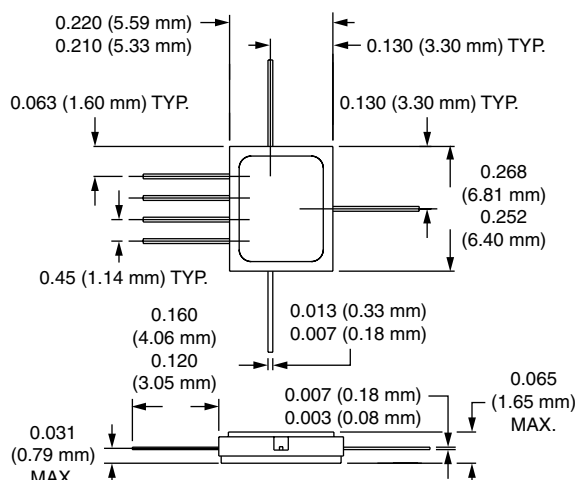

Electrical Specifications at 25°C

Parameter ¹	Frequency ⁷	Min.	Typ.	Max.	Unit
Insertion Loss ²	DC–1.0 GHz		0.4	0.6	dB
	DC–2.0 GHz		0.7	0.9	dB
	DC–4.0 GHz		1.1	1.3	dB
	DC–6.0 GHz		1.7	1.9	dB
Isolation	DC–1.0 GHz	40	48		dB
	DC–2.0 GHz	35	40		dB
	DC–4.0 GHz	30	33		dB
	DC–6.0 GHz	20	25		dB
VSWR ³	DC–1.0 GHz		1.2:1	1.3:1	
	DC–2.0 GHz		1.3:1	1.5:1	
	DC–4.0 GHz		1.6:1	1.8:1	
	DC–6.0 GHz		1.8:1	2.0:1	

Operating Characteristics at 25°C

Parameter	Condition	Frequency	Min.	Typ.	Max.	Unit
Switching Characteristics	Rise, Fall (10/90% or 90/10% RF)			10	20	ns
	On, Off (50% CTL to 90/10% RF)			20	40	ns
	Video Feedthru ⁴			30	40	mV
Input Power for 1 dB Compression		0.5–6 GHz	20	23		dBm
		0.001 GHz	12	15		dBm
Intermodulation Intercept Point (IP3)	For Two-tone Input Power 13 dBm	0.5–6 GHz	34	37		dBm
		0.001 GHz	22	26		dBm
Control Voltages	V _{Low}		0		0.5	V
	V _{High}		4		5.5	V
Supply Voltages ^{5,6}	+5 V @ 1 mA Typ.		+4.75		+5.25	V
	-5 V @ 4 mA Typ.		-4.75		-5.25	V

1. All measurements made in a 50 Ω system, unless otherwise specified.

2. Insertion loss changes by 0.003 dB/°C.

3. Insertion loss state.

4. Video feedthru measured with 1 ns risetime pulse and 500 MHz bandwidth.


5. Supply voltage must be connected before TTL voltage is applied. To avoid voltage sequencing refer to the Application Note section, "Driver Protection Circuit."

6. Current increases from 4 mA to 5 mA @ 85°C.


7. DC = 300 kHz.

8. See Quality/Reliability section.

Typical Performance Data

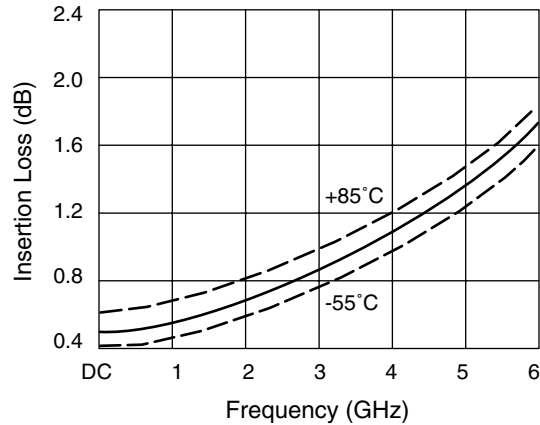

Insertion Loss vs. Frequency

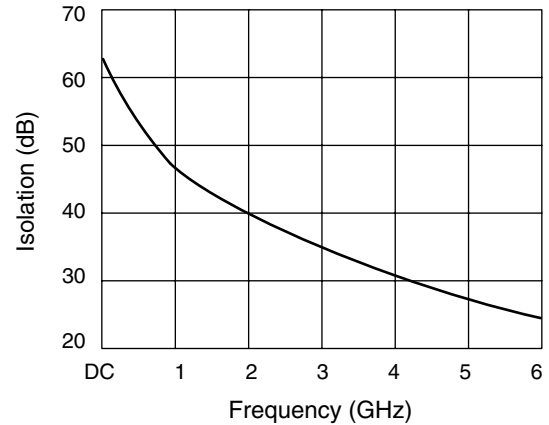

Isolation vs. Frequency


Truth Table

TTL	J ₁ –J ₂
0	Isolation
1	Insertion Loss

Absolute Maximum Ratings

Characteristic	Value
RF Input Power (RF In)	0.5 W > 500 MHz 0.1 W @ 50 MHz
Bias Voltage (V _B)	+7.0 V, -7.0 V
Control Voltage (V _C)	-0.2 V, +7.0 V
Operating Temperature (T _{OP})	-40°C to +90°C
Storage Temperature (T _{ST})	-65°C to +150°C
Thermal Resistance (Θ _{JC})	30°C/W

Pin Out

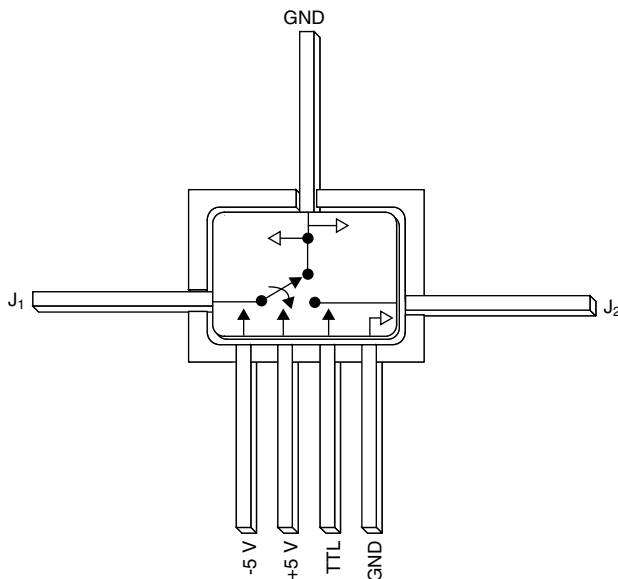

-10

