

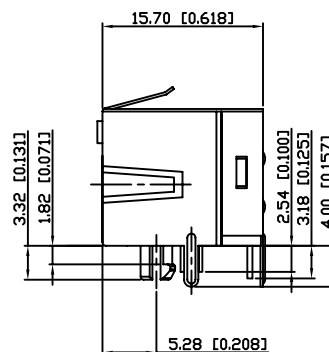


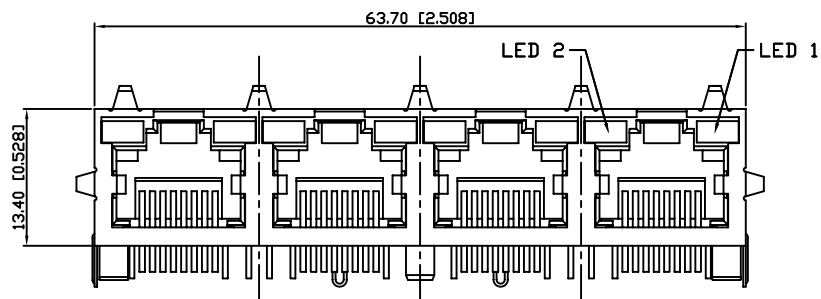


NOTES:

1. MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK
CONTACTS: T=0.35 mm PHOSPHOR BORNEZE, NICKEL UNDERPLATE
ON ALL AREA, TIN ON TERMINATION END,
HARD GOLD ON CONTACT AREA.
SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH NICKEL.
2. OPERATING TEMPERATURE: -40°C ~ +85°C
3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

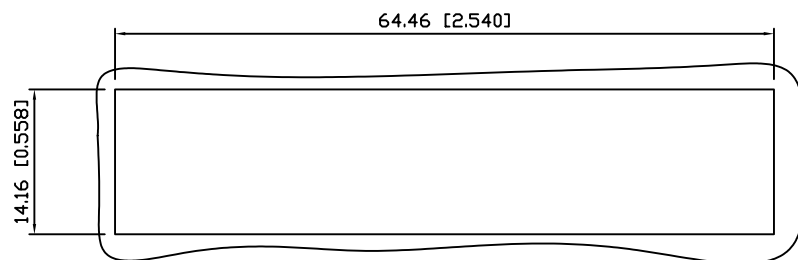


RECOMMENDED
PANEL CUTOUT DIMENSION

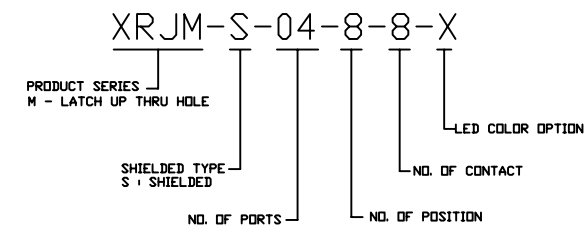


RoHS Compliant

		X MULTIPLE TAIWAN 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11491		
		THIS DRAWING IS A CONTROLLED DOCUMENT.		
TITLE:		RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole		
PART NO:		XRJM-S-04-8-8-X		
		DWG NO:		
		XRJM-S-04-8-8-X		
		DRAWN:		
		IVAN		
		CHKD:		
		TARA		
		DATE:		
		Jul,23,10		
		UNIT	SHEET	REV
mm[inch]		1 of 2	01	

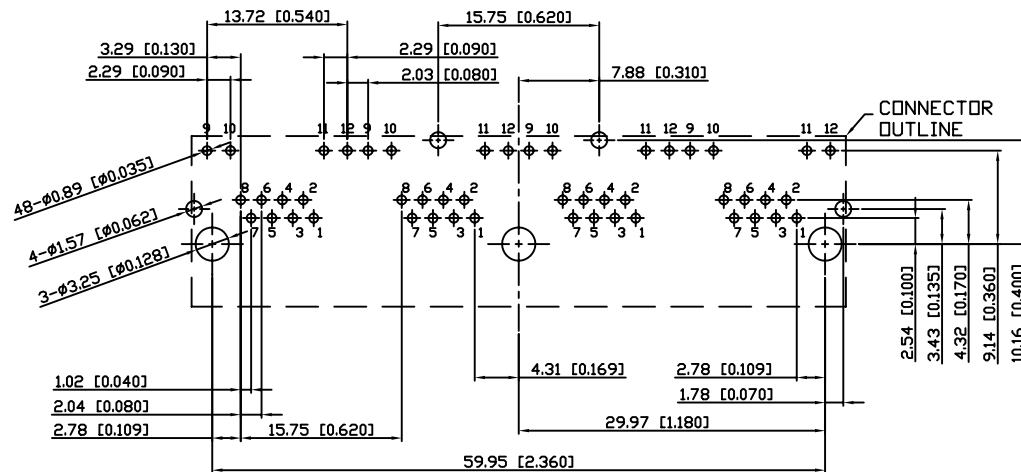

SUGGESTED PCB LAYOUT
TOP VIEW

DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]



LED SCHEMATIC

LED Color Options Table

LED Color Options		LED DASH OPTION
Position 2(Left)	Position 1(Right)	
Yellow	Green	1
Green	Yellow	4
Green	Green	5
Yellow/Green	Yellow/Green	8
Green/Yellow	Green/Yellow	A
Green	Green/Yellow	D
Yellow	Green/Yellow	E
Green/Yellow	Green	H

RoHS Compliant

		XMULTIPLE TAIWAN 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11491	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole		DWG NO: XRJM-S-04-8-8-X	
PART NO: XRJM-S-04-8-8-X		DRAWN: IVAN	
		CHKD: TARA	
		UNIT: mm[inch]	SHEET: 2 of 2
		REV: 01	DATE: Jul,23,10