


REF. ONLY

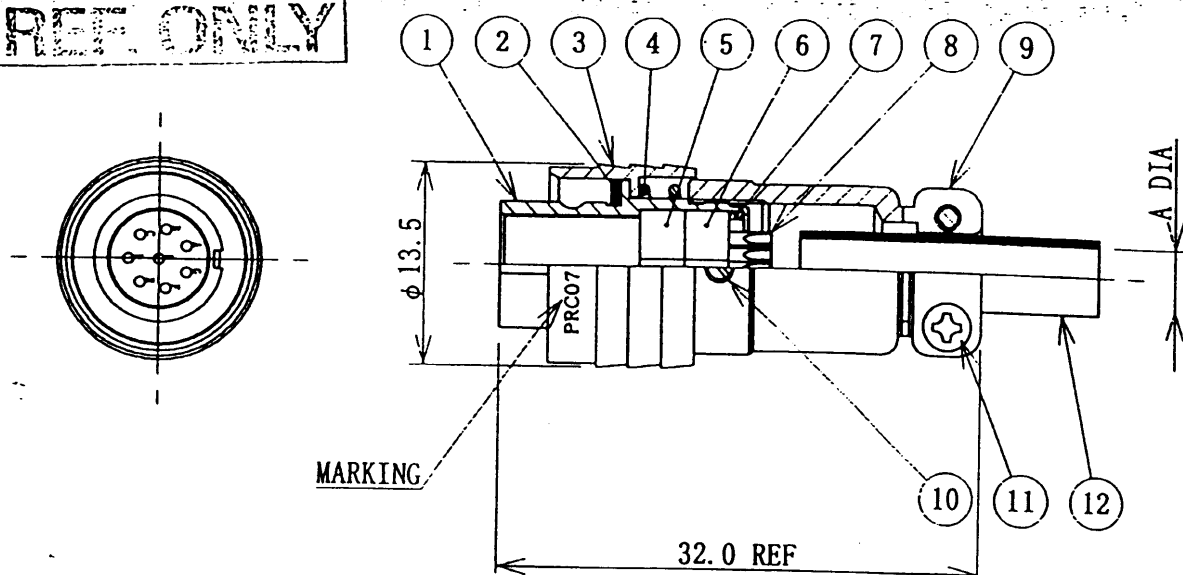

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms AT SEA LEVEL.

INSULATION RESISTANCE : 1000M Ω MIN AT 100V D.C.CONTACT RESISTANCE : 10m Ω MAX D.C. 1A MAX

2. RATING

VOLTAGE RATING : 100V rms MAX AT SEA LEVEL

CURRENT RATING : 2A MAX


3. SOLDER BUCKET SIZE : 0.5 DIA

4. A DIA : $\phi 5.2 (\phi 4.0)$

*() SLEEVE AT FITTING

5. MARKING : PRC07 T.M.W PAT

NUMBER OF CONTACT
(VIEW ON TERMINATION
SIDE OF INSULATOR)



1	2	SLEEVE	VINYL CHLORIDE	—	1	
1	1	CROSS RECESSED HEAD SCREW	BRASS	NICKEL PLATED	2	
1	0	SLOTTED SET SCREW	STEEL	NICKEL PLATED	1	
9		REAR SHELL	BRASS	NICKEL PLATED	1	
8		SOCKET CONTACT	BERYLLIUM COPPER ALLOY	GOLD FLASH OVER NICKEL PLATED	8	
7		FERRULE	BRASS	NICKEL PLATED	1	
6		REAR INSULATOR	PBT RESIN	—	1	
5		FRONT INSULATOR	PBT RESIN	—	1	
4		SPRING	PIANO WIRE	NICKEL PLATED	1	
3		SLIDE RING	BRASS	NICKEL PLATED	1	
2		GASKET	SILICONE RUBBER	—	1	
1		INSERT SHELL	BRASS	NICKEL PLATED	1	
品番 ITEM		部品名 DESCRIPTION	材質 MATERIAL	処理 TREATMENT	数量 QTY	備考 REMARKS

記号 SYM	変更 REVISION	第三角法 PROJECTION	尺度 SCALE 2 / 1	TAJIMI ELECTRONICS CO., LTD.		
			単位 UNITS mm	製図 DRAWN S. SATO	DATE 11 JAN 1999	PRC07-P8F PRC07-1001 変更REV 1
		交差 ANGLE	TOLERANCES ON . X . XX	設計 ENGR T. Waka	DATE 11 JAN 99	
		± ± ±		検図 CHK T. Waka	DATE 11 JAN 99	
		仕様書番号 SPEC No.		承認 APPD K. Yagi	DATE 11 JAN 1999	
SHEET						