
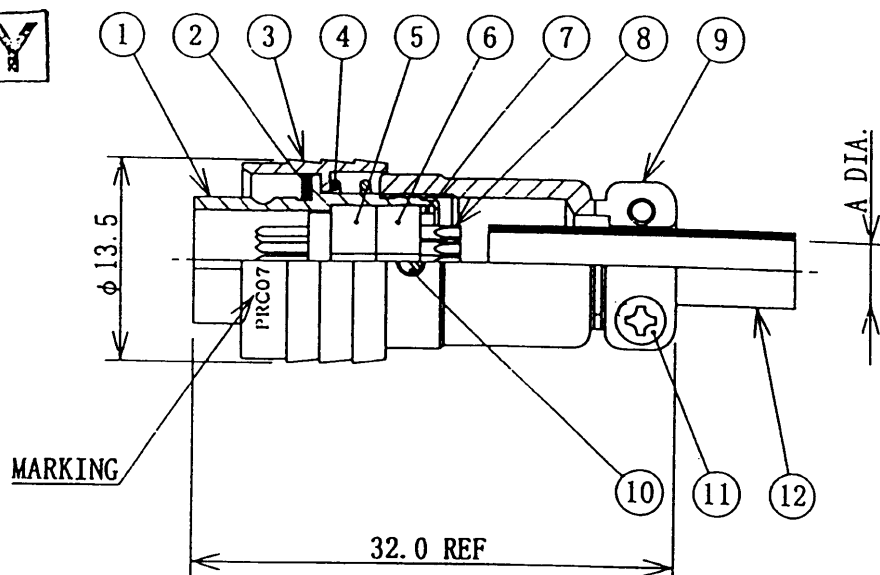


REF. ONLY



NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms. AT SEA LEVEL.

INSULATION RESISTANCE : 1000M Ω MIN. AT 100V D.C.CONTACT RESISTANCE : 10m Ω MAX. D.C. 1A MAX.

2. RATING

VOLTAGE RATING : 100V rms. MAX. AT SEA LEVEL


CURRENT RATING : 2A MAX.

3. SOLDER BUCKET SIZE : 0.5 DIA.

4. A DIA.: ϕ 5.2 (ϕ 4.0)

*() SLEEVE AT FITTING

5. MARKING : PRC07 T.M. W PAT

NUMBER OF CONTACT
(VIEW ON TERMINATION
SIDE OF INSULATOR)

1	2	SLEEVE	VINYL CHLORIDE	—	1	
1	1	CROSS RECESSED HEAD SCREW	BRASS	NICKEL PLATED	2	
1	0	SLOTTED SET SCREW	STEEL	NICKEL PLATED	1	
9		REAR SHELL	BRASS	NICKEL PLATED	1	
8		PIN CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL PLATED	8	
7		FERRULE	BRASS	NICKEL PLATED	1	
6		REAR INSULATOR	PBT RESIN	—	1	
5		FRONT INSULATOR	PBT RESIN	—	1	
4		SPRING	PIANO WIRE	NICKEL PLATED	1	
3		SLIDE RING	BRASS	NICKEL PLATED	1	
2		GASKET	SILICONE RUBBER	—	1	
1		INSERT SHELL	BRASS	NICKEL PLATED	1	
品番 ITEM		部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数 量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION	尺 度 SCALE 2 / 1	(T.M.W) TAJIMI ELECTRONICS CO., LTD.	
		単位 UNITS mm	製図 DRAWN T. SHIMAZAKI	DATE 3-DEC-1998	PRC07-P8M PRC07-1002
		公差 TOLERANCES ON ANGLE . X . XX	設計 ENGR T. Waki	DATE 4-DEC-1998	
		仕 様 番 号 SPEC No	検 査 CHK T. Waki	DATE 4-DEC-1998	
			承認 APPD K. Yagi	DATE 4-DEC-1998	
SHEET					