

Ultra fast low-loss controlled avalanche rectifiers

BYV28 series
FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack
- Also available with preformed leads for easy insertion.

DESCRIPTION

Rugged glass SOD64 package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

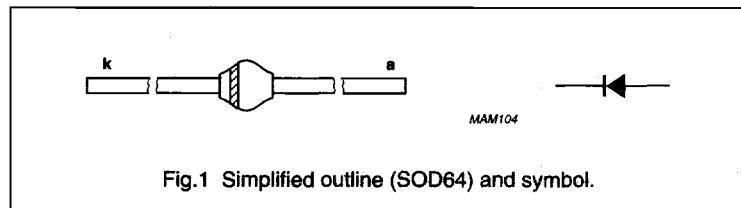


Fig.1 Simplified outline (SOD64) and symbol.

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RRM}	repetitive peak reverse voltage BYV28-50 BYV28-100 BYV28-150 BYV28-200 BYV28-300 BYV28-400 BYV28-600		—	50	V
			—	100	V
			—	150	V
			—	200	V
			—	300	V
			—	400	V
			—	600	V
V_R	continuous reverse voltage BYV28-50 BYV28-100 BYV28-150 BYV28-200 BYV28-300 BYV28-400 BYV28-600		—	50	V
			—	100	V
			—	150	V
			—	200	V
			—	300	V
			—	400	V
			—	600	V
$I_{F(AV)}$	average forward current BYV28-50 to 400 BYV28-600	$T_{tp} = 85^\circ\text{C}$; lead length = 10 mm; see Fig.2; averaged over any 20 ms period; see also Fig.6	—	3.5	A
			—	3.0	A
$I_{F(AV)}$	average forward current BYV28-50 to 400 BYV28-600	$T_{amb} = 60^\circ\text{C}$; PCB mounting (see Fig.13); see Fig.3; averaged over any 20 ms period; see also Fig.6	—	1.90	A
			—	1.45	A
I_{FRM}	repetitive peak forward current BYV28-50 to 400	$T_{tp} = 85^\circ\text{C}$; see Fig.4	—	30	A
I_{FRM}	repetitive peak forward current BYV28-50 to 400	$T_{amb} = 60^\circ\text{C}$; see Fig.5	—	17	A

Ultra fast low-loss controlled avalanche rectifiers

BYV28 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_{F\text{SM}}$	non-repetitive peak forward current	$t = 10 \text{ ms half sine wave}; T_j = T_{j\text{ max}} \text{ prior to surge}; V_R = V_{RRM\text{max}}$	—	90	A
$E_{R\text{SM}}$	non-repetitive peak reverse avalanche energy	$L = 120 \text{ mH}; T_j = T_{j\text{ max}} \text{ prior to surge}; \text{inductive load switched off}$	—	20	mJ
T_{stg}	storage temperature		-65	+175	°C
T_j	junction temperature		-65	+175	°C

ELECTRICAL CHARACTERISTICS $T_j = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage BYV28-50 to 200	$I_F = 3.5 \text{ A}; T_j = T_{j\text{ max}}; \text{see Figs 7; 8 and 9}$	—	—	0.80	V
	BYV28-300 and 400		—	—	0.83	V
	BYV28-600		—	—	1.05	V
V_F	forward voltage BYV28-50 to 200	$I_F = 3.5 \text{ A}; \text{see Figs 7; 8 and 9}$	—	—	1.02	V
	BYV28-300 and 400		—	—	1.05	V
	BYV28-600		—	—	1.25	V
$V_{(BR)R}$	reverse avalanche breakdown voltage BYV28-50	$I_R = 0.1 \text{ mA}$				
	BYV28-100		55	—	—	V
	BYV28-150		110	—	—	V
	BYV28-200		165	—	—	V
	BYV28-300		220	—	—	V
	BYV28-400		330	—	—	V
	BYV28-600		440	—	—	V
I_R	reverse current	$V_R = V_{RRM\text{max}}; \text{see Fig.10}$	—	—	5	μA
		$V_R = V_{RRM\text{max}}; T_j = 165^\circ\text{C}; \text{see Fig. 10}$	—	—	150	μA
t_{rr}	reverse recovery time BYV28-50 to 200	when switched from $I_F = 0.5 \text{ A}$ to $I_R = 1 \text{ A}$; measured at $I_R = 0.25 \text{ A}$; see Fig.15	—	—	25	ns
			—	—	50	ns
			—	—	—	—
C_d	diode capacitance BYV28-50 to 200	$f = 1 \text{ MHz}; V_R = 0 \text{ V}; \text{see Figs 11 and 12}$	—	190	—	pF
			—	150	—	pF
			—	—	—	—
$ \frac{dI_R}{dt} $	maximum slope of reverse recovery current BYV28-50 to 400	when switched from $I_F = 1 \text{ A}$ to $V_R \geq 30 \text{ V}$ and $dI_F/dt = -1 \text{ A}/\mu\text{s}$; see Fig.14	—	—	4	$\text{A}/\mu\text{s}$




**Ultra fast low-loss
controlled avalanche rectifiers****BYV28 series****THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j\-\!tp}$	thermal resistance from junction to tie-point	lead length = 10 mm	25	K/W
$R_{th\ j\-\!a}$	thermal resistance from junction to ambient	note 1	75	K/W

Note


1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer \geq 40 μm , see Fig.13.
For more information please refer to the '*General Part of Handbook SC01*'.

Ultra fast low-loss controlled avalanche rectifiers

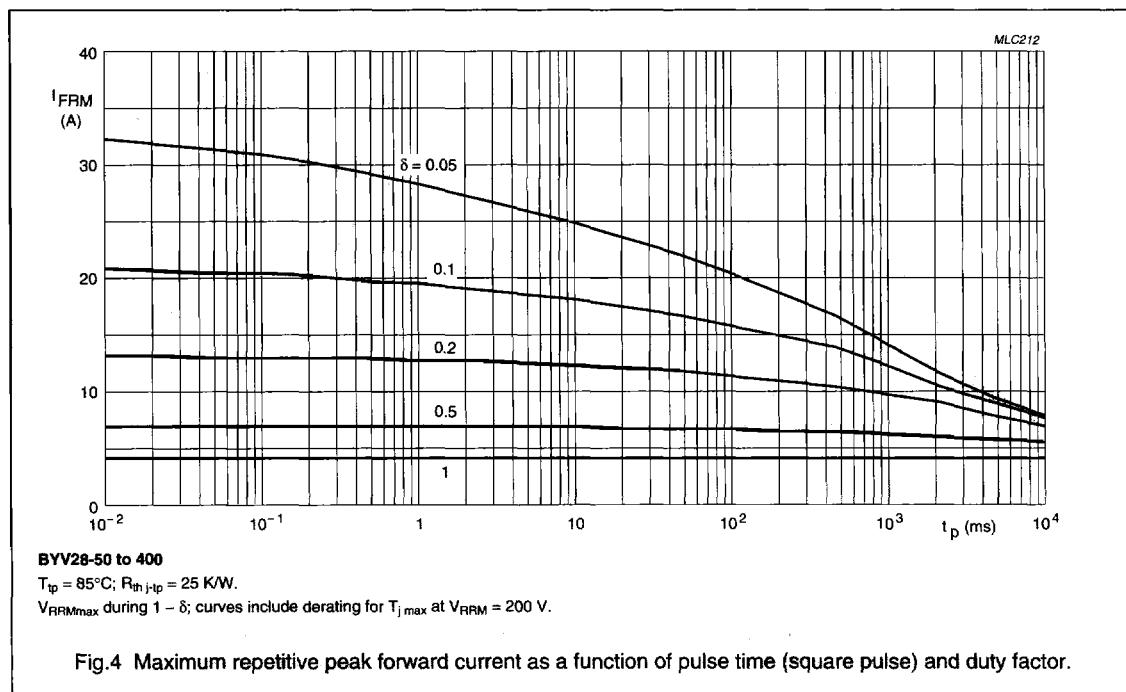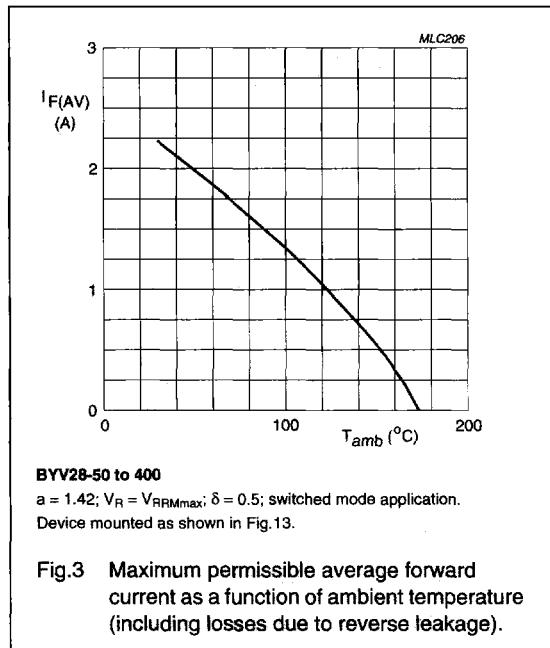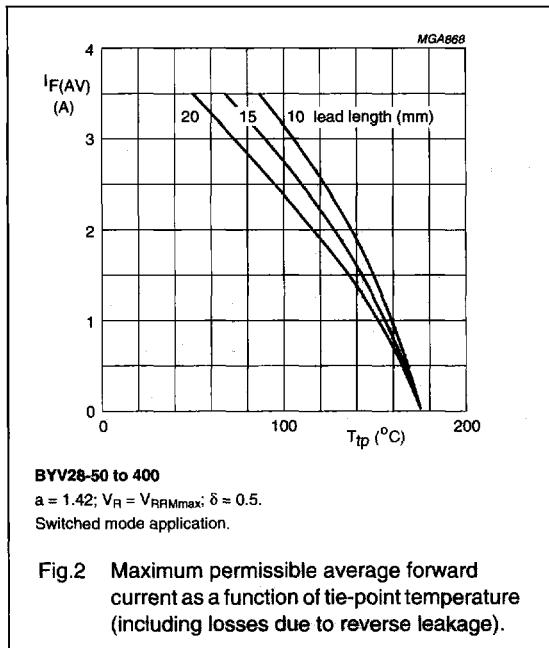BYV28 series
GRAPHICAL DATA


Ultra fast low-loss controlled avalanche rectifiers

BYV28 series

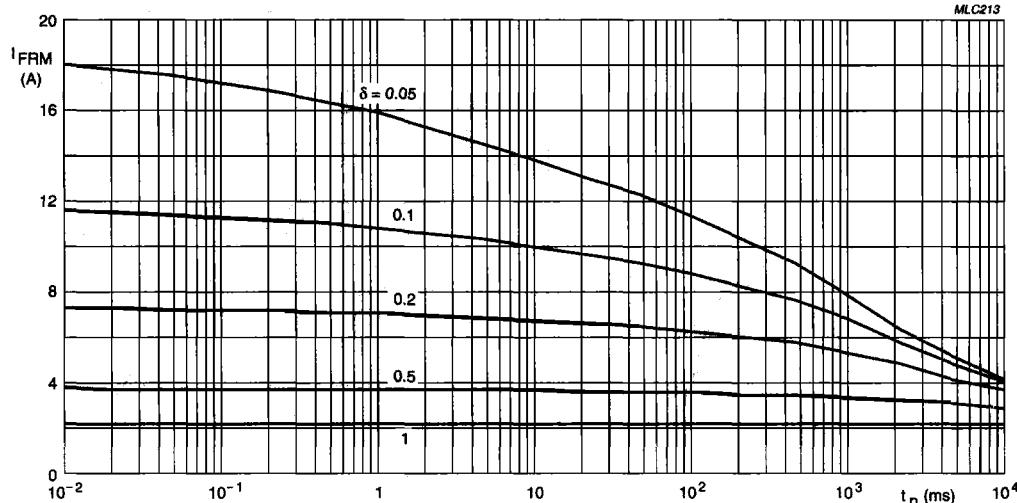


BYV28-50 to 400

$T_{amb} = 60^\circ\text{C}$; $R_{th,j-a} = 75 \text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 200 \text{ V}$.


Fig.5 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

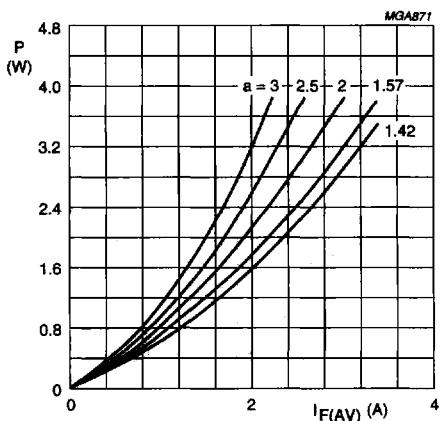

BYV28-50 to 400

$a = I_{F(RMS)} / I_{F(AV)}$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Fig.6 Maximum steady state power dissipation (forward plus leakage current losses, excluding switching losses) as a function of average forward current.

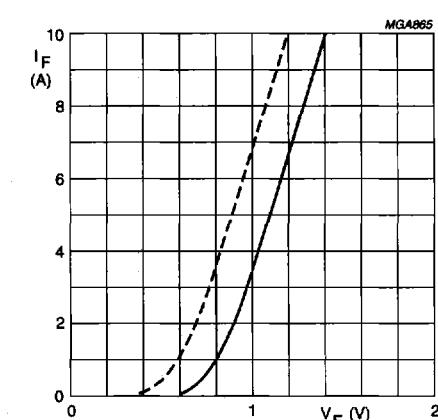

BYV28-50 to 200


Dotted line: $T_j = 175^\circ\text{C}$.

Solid line: $T_j = 25^\circ\text{C}$.

Fig.7 Forward current as a function of forward voltage; maximum values.

Ultra fast low-loss controlled avalanche rectifiers


BYV28 series

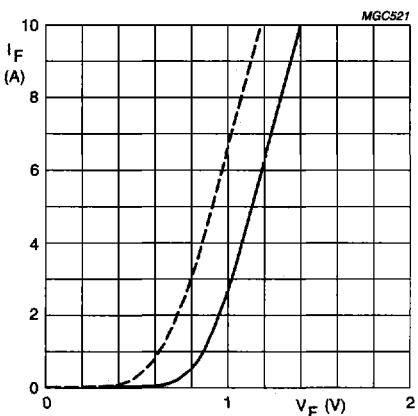

BYV28-300 and 400

Dotted line: $T_j = 175^\circ\text{C}$.
Solid line: $T_j = 25^\circ\text{C}$.


Fig.8 Forward current as a function of forward voltage; maximum values.

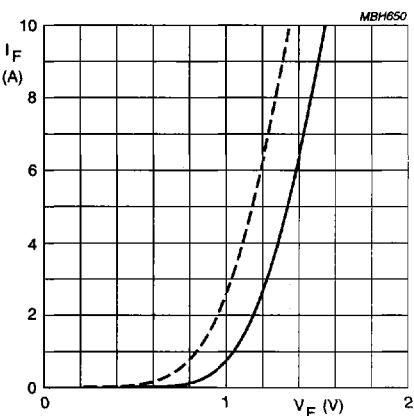

BYV28-600


Dotted line: $T_j = 175^\circ\text{C}$.
Solid line: $T_j = 25^\circ\text{C}$.

Fig.9 Forward current as a function of forward voltage; maximum values.

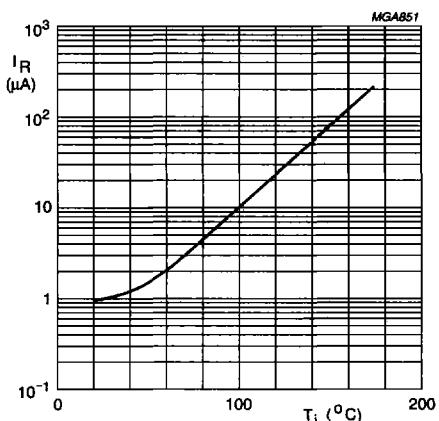

$V_R = V_{RIMmax}$.

Fig.10 Reverse current as a function of junction temperature; maximum values.

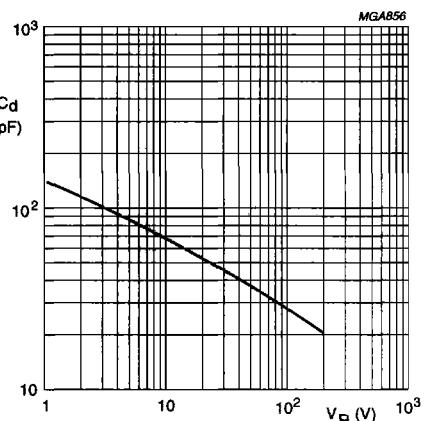


BYV28-50 to 200

$f = 1 \text{ MHz}; T_j = 25^\circ\text{C}$.

Fig.11 Diode capacitance as a function of reverse voltage; typical values.


Ultra fast low-loss controlled avalanche rectifiers

BYV28 series

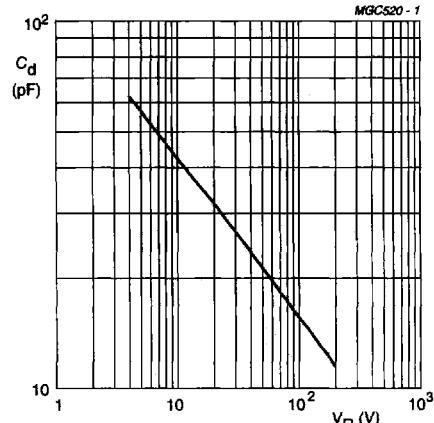

BYV28-300 and 400
 $f = 1 \text{ MHz}; T_j = 25^\circ\text{C}$.

Fig.12 Diode capacitance as a function of reverse voltage; typical values.

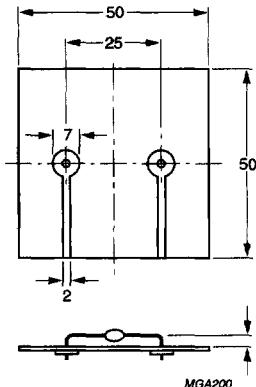

Dimensions in mm.

Fig.13 Device mounted on a printed-circuit board.

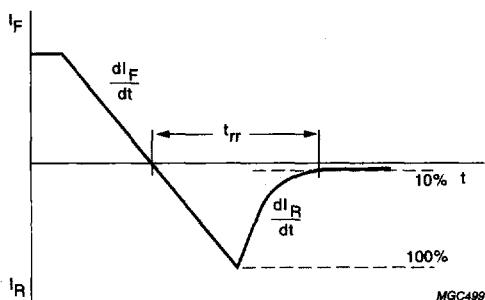
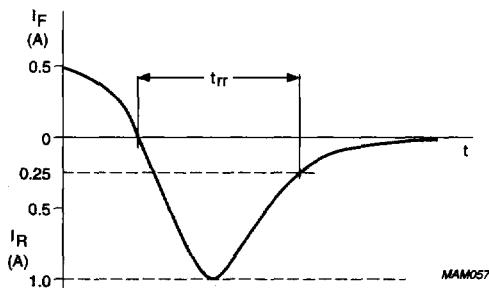
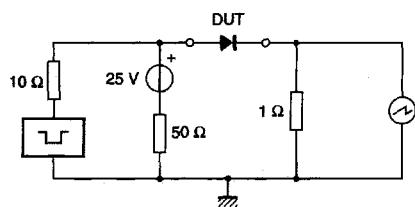


Fig.14 Reverse recovery definitions.

Ultra fast low-loss controlled avalanche rectifiers

BYV28 series

Input impedance oscilloscope: $1 \text{ M}\Omega$, 22 pF ; $t_r \leq 7 \text{ ns}$.

Source impedance: 50Ω ; $t_r \leq 15 \text{ ns}$.

Fig.15 Test circuit and reverse recovery time waveform and definition.