


## Lead (Pb)-free Thick Film, Rectangular, Pulse Proof Chip Resistors

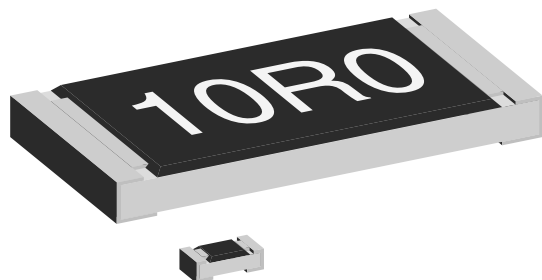

### FEATURES

- High pulse performance (during 10 μs up to 700 W)
- Metal glaze on high quality ceramic
- Protective overglaze
- Lead (Pb)-free solder contacts on Ni barrier layer
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)
- Excellent stability ( $\Delta R/R \leq \pm 1\%$  for 1000 h at 70 °C) in different environmental conditions

### STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE		POWER RATING $P_{70\text{ }^\circ\text{C}}$ W	RATED VOLTAGE $V_{\Xi}$	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE $\Omega$	E-SERIES
	INCH	METRIC						
D12/CRCW0805-IF	0805	2012	0.125	$\sqrt{P \times R}$	$\pm 200$	$\pm 5, \pm 10$	1R0 - 40K	24
D25/CRCW1206-IF	1206	3216	0.25	$\sqrt{P \times R}$	$\pm 200$	$\pm 5, \pm 10$	1R0 - 40K	24

#### Notes:

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.
- Marking and packaging: See appropriate catalog or web pages
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material

### TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	D12/CRCW0805-IF	D25/CRCW1206-IF
Rated Dissipation at 70 °C <sup>(2)</sup>	W	0.125	0.25
Rated Voltage	$V_{\Xi}$	$\sqrt{P \times R}$	
Insulation Voltage (1 min)	$V_{\text{peak}}$	200	300
Thermal Resistance <sup>(1)</sup>	K/W	$\leq 440$	$\leq 220$
Insulation Resistance	$\Omega$	$> 10^9$	
Category Temperature Range	°C	- 55 to + 125 (+ 155)	
Weight/1000 pieces	g	5.5	10

#### Notes:

<sup>(1)</sup> The measuring conditions are in acc. to EN 140401-802

<sup>(2)</sup> The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.

### PART NUMBER AND PRODUCT DESCRIPTION

PART NUMBER: CRCW08051R00JNEAIF <sup>(3)</sup>

C R C W 0 8 0 5 1 R 0 0 J N E A I F

MODEL/SIZE	VALUE	TOLERANCE	TCR	PACKAGING <sup>(4)</sup>	SPECIAL
CRCW0805 CRCW1206	R = Decimal K = Thousand	J = $\pm 5\%$ K = $\pm 10\%$	N = $\pm 200$ ppm/K S = Special	EA, EB, EC, EI, EL	Up to 2 digits IF = Pulse

PRODUCT DESCRIPTION: D12/CRCW0805-IF 200 1R0 5% ET1 e3



D12/CRCW0805-IF	200	1R0	5%	ET1	e3
MODEL	TCR	RESISTANCE VALUE	TOLERANCE	PACKAGING <sup>(4)</sup>	LEAD (Pb)-FREE
D12/CRCW0805-IF D12/CRCW1206-IF	$\pm 200$ ppm/K	1R0 = 1 $\Omega$ 10K = 10.0 k $\Omega$	$\pm 5\%$ $\pm 10\%$	ET1, ET5, ET6, EG1, E20	e3 = Pure tin Terminal finish

#### Notes:

<sup>(3)</sup> Preferred way for ordering products is by use of the PART NUMBER


<sup>(4)</sup> Please refer to table PACKAGING, see next page

PACKAGING											
MODEL	REEL								BULK		
	TAPE WIDTH	DIAMETER	PITCH	PIECES/ REEL	PACKING CODE				PIECES	PACKAGING CODE	
					PART NUMBER		PRODUCT DESC.			PART NUMBER	PRODUCT DESC.
					PAPER	BLISTER	PAPER	BLISTER			
D12/CRCW0805-IF	8 mm	180 mm/7"	4 mm	5000	EA	EI	ET1	EG1	10 000	EY	E27
		285 mm/11.25"	4 mm	10 000	EB		ET5				
		330 mm/13"	4 mm	20 000	EC	EL	ET6	E20			
D25/CRCW1206-IF	8 mm	180 mm/7"	4 mm	5000	EA	EI	ET1	EG1			
		285 mm/11.25"	4 mm	10 000	EB		ET5				
		330 mm/13"	4 mm	20 000	EC	EL	ET6	E20			

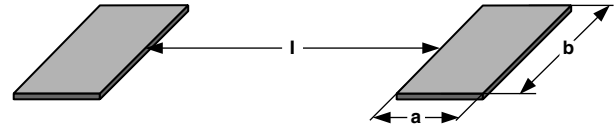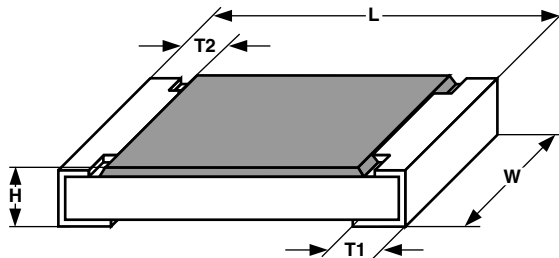**DIMENSIONS**


SIZE		DIMENSIONS (mm)				
INCH	METRIC	L	W	H	T1	T2
0805	2012	$2.0^{+0.10}_{-0.20}$	$1.25 \pm 0.15$	$0.45 \pm 0.05$	$0.3 \pm 0.2$	$0.3 \pm 0.2$
1206	3216	$3.2^{+0.10}_{-0.20}$	$1.6 \pm 0.15$	$0.55 \pm 0.05$	$0.4 \pm 0.2$	$0.4 \pm 0.2$


SIZE		SOLDER PAD DIMENSIONS					
		REFLOW SOLDERING			WAVE SOLDERING		
INCH	METRIC	A	B	I	A	B	I
0805	2012	0.7	1.3	1.2	0.9	1.3	1.3
1206	3216	0.9	0.7	2.0	1.1	1.7	2.3

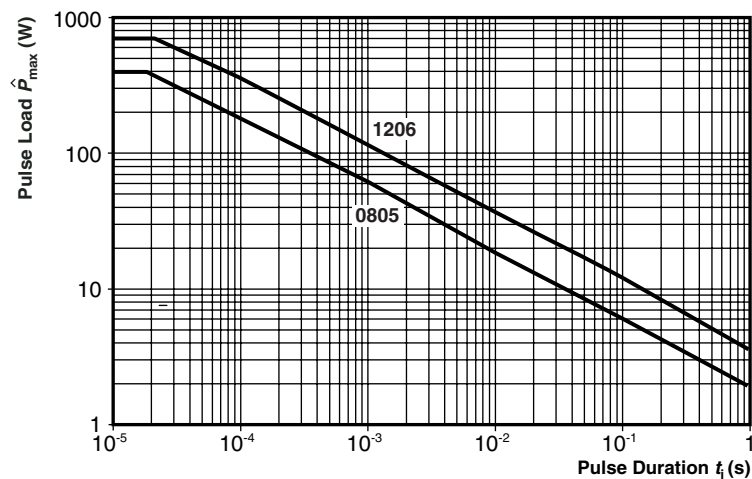**FUNCTIONAL PERFORMANCE**
**Single Pulse**


Maximum pulse load, single pulse; applicable if  $P \rightarrow 0$  and  $n \leq 1000$  and  $\hat{U} \leq \hat{U}_{max}$ ; for permissible resistance change equivalent to 8000 h operation




**Continuous Pulse**

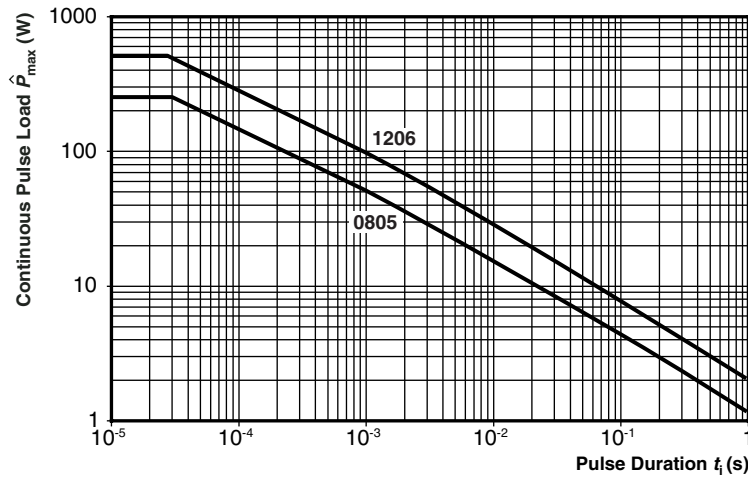


Maximum pulse load, continuous pulses; applicable if  $P \leq P(\vartheta_{amb})$  and  $\dot{U} \leq \dot{U}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

**Pulse Voltage**

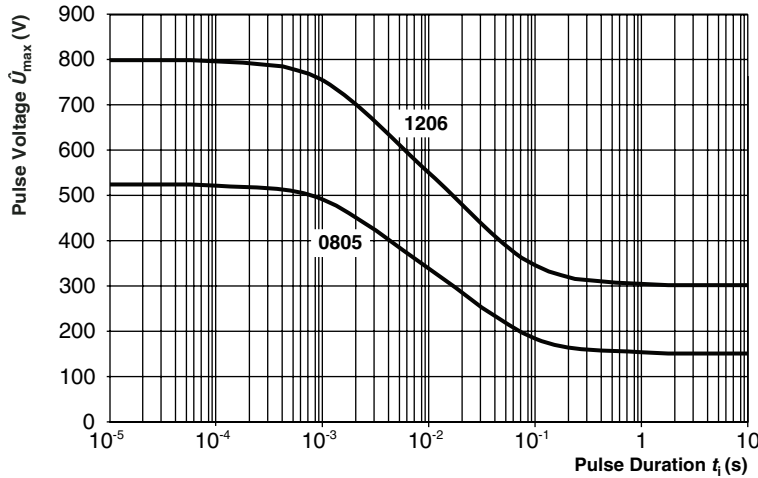


Maximum pulse voltage, single and continuous pulses; applicable if  $\hat{P} \leq \hat{P}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

**Single-pulse high voltage overload test 1.2/50  $\mu$ s**

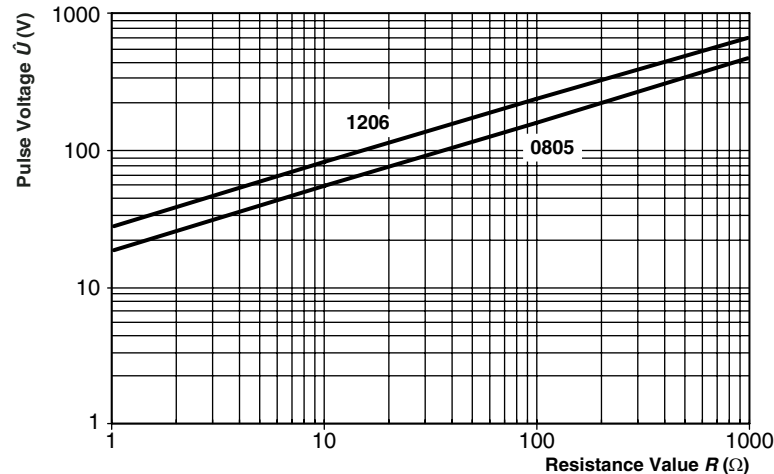


Pulse load rating in accordance to EN 60115-1, 4.27; 1.2  $\mu$ s/50  $\mu$ s; 5 pulses at 12 s intervals; for permissible resistance change 1 %


**Single-pulse high voltage overload test 10/700  $\mu$ s**

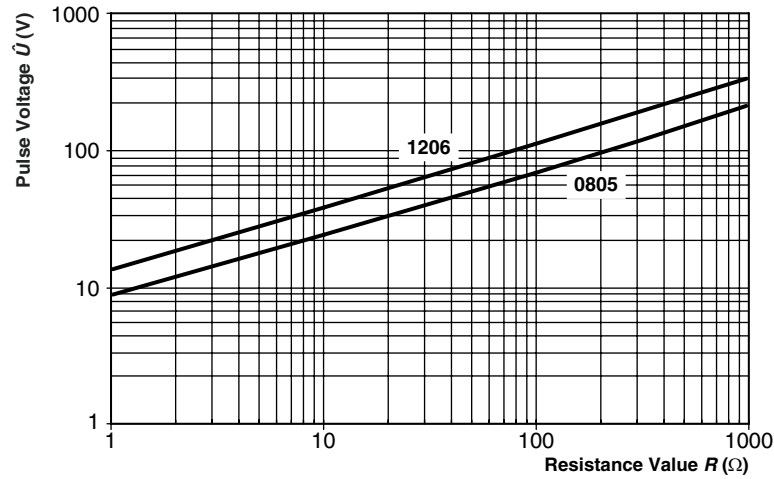

Pulse load rating in accordance to EN 60115-1, 4.27; 10  $\mu$ s/700  $\mu$ s;  
10 pulses at 1 minute intervals; for permissible resistance change 1 %

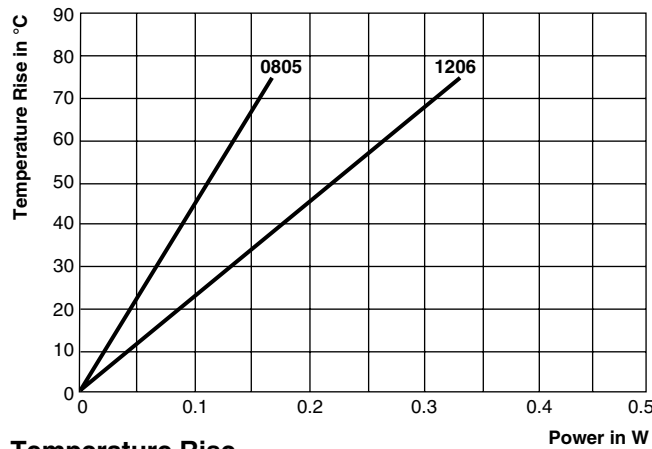

**Temperature Rise**

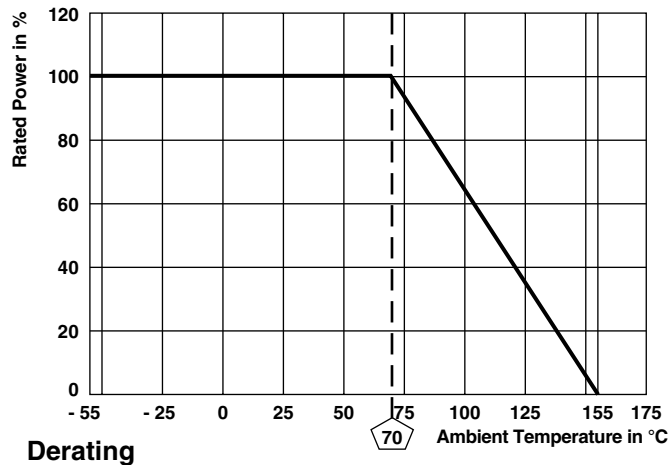

**Derating**



TEST PROCEDURES AND REQUIREMENTS		
EN 60115-1		
TEST (clause)	CONDITIONS OF TEST	REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R/R$ )
		STABILITY CLASS 1 OR BETTER
	Stability for product types:	
	<b>D../CRCW....-IF e3</b>	1 $\Omega$ to 40 k $\Omega$
Resistance (4.5)	-	$\pm 5\%$ $\pm 10\%$
Temperature coefficient (4.8.4.2)	20/- 55/20 °C and 20/125/20 °C	$\pm 200$ ppm/K
Overload (4.13)	$U = 2.5 \times (P_{70} \times R)^{1/2}$ $\leq 2 \times U_{max.}$ ; Duration: according the style	$\pm (0.25\% R + 0.05 \Omega)$
Solderability (4.17.5)	Aging 4 h at 155 °C, dryheat solder bath method; 235 °C; 2 s visual examination	Good tinning ( $\geq 95\%$ covered) no visible damage
Resistance to soldering heat (4.18.2)	Solder bath method; (260 $\pm$ 5) °C; (10 $\pm$ 1) s	$\pm (0.25\% R + 0.05 \Omega)$
Rapid change of temperature (4.19)	30 min at LCT = - 55 °C; 30 min at UCT = 125 °C; 5 cycles	$\pm (0.25\% R + 0.05 \Omega)$
Damp heat, steady state (4.24)	(40 $\pm$ 2) °C; 56 days; (93 $\pm$ 3) % RH	$\pm (1\% R + 0.05 \Omega)$
Climatic sequence (4.23)	16 h at UCT = 125 °C; 1 cycle at 55 °C; 2 h at LCT = - 55 °C; 1 h/1 kPa at 15 °C to 35 °C; 5 cycles at 55 °C $U = (P_{70} \times R)^{1/2}$ $U = U_{max.}$ ; whichever is less severe	$\pm (1\% R + 0.05 \Omega)$
Endurance at 70 °C (4.25.1)	$U = (P_{70} \times R)^{1/2}$ $U = U_{max.}$ ; whichever is less severe 1.5 h on; 0.5 h off; 70 °C; 1000 h	$\pm (1\% R + 0.05 \Omega)$
Extended endurance (4.25.1.8)	Duration extended to 8000 h	$\pm (2\% R + 0.1 \Omega)$
Endurance at upper category temperature (4.25.3)	UCT = 125 °C; 1000 h	$\pm (1\% R + 0.05 \Omega)$

APPLICABLE SPECIFICATIONS	
• EN 60115-1	Generic Specification
• EN 140400	Sectional Specification
• EN 140401-802	Detail Specification
• IEC 60068-2-X	Variety of environmental test procedures
• IEC 60286-3	Packaging of SMD components



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.