

SPECIFICATIONS

Constituent

Cable: 26AWG(7/0.16) Coaxial Cable
Connector: Mini UHF + RF Female Connector

RF Series
RF Female Connector to
Mini UHF Connector Cable

Mechanical

Durability: 500 Cycles

Electrical

Insulation Resistance: 100M min. at 200V DC for 1 Sec.
Dielectric Withstanding Voltage: 500V AC at 0.5mA for 1 Sec.
Insertion Loss: 1.5dB max. at 925MHz, 2.0dB max. at 1.9GHz

Physical


Operating Temperature: -40 to +60
Storage Temperature: -40 to +60

Agency Approvals

UL 94V-0 rated



DRAWING

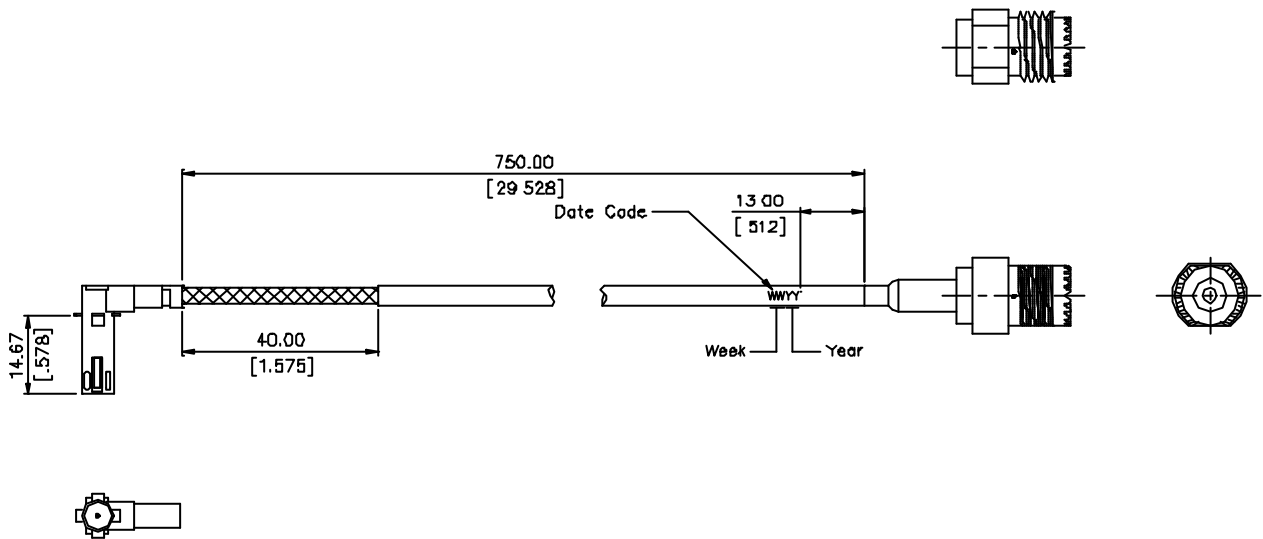

ORDERING INFORMATION

PRODUCT NO.: **CYR2-AP03MJ04**

