

Wirewound Resistors, Industrial Power, Tubular



FEATURES

- High temperature silicon coating
- Complete welded construction
- Excellent for intermittent power and pulsing applications
- Available in non-inductive styles (model NHLW) with Aryton-Perry winding
- Axial or radial terminals for through hole or lead weld applications
- Excellent stability in operation (< 3 % change in resistance)



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS					
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25^\circ\text{C}}$ W	RESISTANCE RANGE Ω		WEIGHT (typical) g
			$\pm 5\%$	$\pm 10\%$	
HLW03 NHLW03	HLW-3 NHLW-3	3	1.0 - 6K 1.0 - 700	0.10 - 6K 1.0 - 700	1.16
HLW05 NHLW05	HLW-5 NHLW-5	5.25	1.0 - 15K 1.0 - 1.9K	0.10 - 15K 1.0 - 1.9K	2.12
HLW06 NHLW06	HLW-6 NHLW-6	8	1.0 - 20.5K 1.0 - 2.7K	0.10 - 20.5K 1.0 - 2.7K	4.60
HLW10 NHLW10	HLW-10 NHLW-10	10	1.0 - 29K 1.0 - 3.7K	0.10 - 29K 1.0 - 3.7K	6.24
HLW12 NHLW12	HLW-12 NHLW-12	12	1.0 - 58K 1.0 - 3.9K	0.10 - 58K 1.0 - 3.9K	6.60
HLW15 NHLW15	HLW-15 NHLW-15	15	1.0 - 60K 1.0 - 4.3K	0.10 - 58K 1.0 - 4.3K	8.82
HLW20 NHLW20	HLW-20 NHLW-20	20	1.0 - 95K 1.0 - 6.8K	0.10 - 95K 1.0 - 6.8K	11.36



TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	HLW RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^\circ\text{C}$	± 90 for 0.1 Ω to 0.99 Ω ; ± 50 for 1 Ω to 9.9 Ω ; ± 30 for 10 Ω and above
Dielectric Withstanding Voltage	V_{AC}	1000, from terminal to mounting hardware
Short Time Overload	-	10 x rated power for 5 s
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Insulation Resistance	Ω	1000 M Ω minimum dry, 100 M Ω minimum after moisture test
Operating Temperature Range	$^\circ\text{C}$	- 55 to + 350

GLOBAL PART NUMBER INFORMATION																	
New Global Part Numbering: NHLW12A1Z10R00JF (preferred part number format)																	
N	H	L	W	1	2	A	1	Z	1	0	R	0	0	J	F		
GLOBAL MODEL	TERMINAL DESIGNATION	TERMINAL FINISH	RESISTANCE VALUE	TOLERANCE	PACKAGING CODE	SPECIAL											
NHLW12 (See "Standard Electrical Specifications" table above for additional P/N's)	A1 A2 R1 R2	E = Lead (Pb)-free Z = Tin/lead	R = Decimal K = Thousand 10R00 = 10.0 Ω 1K000 = 1 k Ω	J = $\pm 5.0\%$ K = $\pm 10.0\%$	E = Lead (Pb)-free foam pack F = Tin/lead foam pack (F01)	(Dash Number) (up to 2 digits) From 1 - 99 as applicable											
Historical Part Number Example: NHLW-12-A1Z 10 Ω 5 % F01 (will continue to be accepted)																	
NHLW-12			A1Z			10 Ω			5 %			F01					
HISTORICAL MODEL			TERMINAL/FINISH			RESISTANCE VALUE			TOLERANCE			PACKAGING					

* Pb containing terminations are not RoHS compliant, exemptions may apply



DIMENSIONS in inches [millimeters]

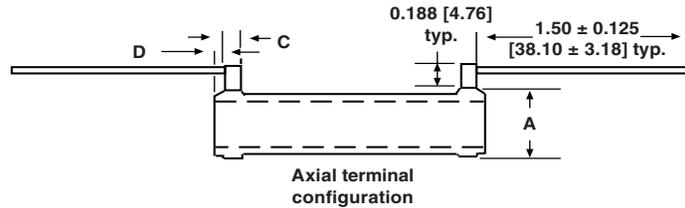

GLOBAL MODEL	A (max.)	B typ.	C ± 0.031 [0.79]	D typ.	CORE DIMENSIONS			AXIAL TERMINAL DESIGNATION	RADIAL TERMINAL DESIGNATION	MOUNTING HARDWARE
					LENGTH ± 0.063 [1.59]	O.D.	I.D. ± 0.031 [0.79]			
HLW03	0.297 [7.54]	0.282 [7.16]	0.063 [1.59]	0.047 [1.19]	0.438 [11.11]	0.203 [5.16]	0.125 [3.18]	A2Z	R2Z	-
HLW05	0.344 [8.73]	0.469 [11.91]	0.063 [1.59]	0.047 [1.19]	0.625 [15.88]	0.250 [6.35]	0.125 [3.18]	A2Z	R2Z	-
HLW06	0.406 [10.32]	0.688 [17.48]	0.125 [3.18]	0.094 [2.38]	1.000 [25.40]	0.313 [7.94]	0.188 [4.76]	A1Z	R1Z	101, 204, 301
HLW10	0.563 [14.28]	0.688 [17.48]	0.125 [3.18]	0.094 [2.38]	1.000 [25.40]	0.438 [11.11]	7.94 [0.313]	A1Z	R1Z	101, 203, 301
HLW12	0.406 [10.32]	1.438 [36.53]	0.125 [3.18]	0.094 [2.38]	1.750 [44.45]	0.313 [7.94]	4.76 [0.188]	A1Z	R1Z	101, 204, 301
HLW15	0.563 [14.29]	1.188 [30.18]	0.125 [3.18]	0.094 [2.38]	1.500 [38.10]	0.438 [11.11]	7.94 [0.313]	A1Z	R1Z	101, 203, 301
HLW20	0.563 [14.29]	1.688 [42.88]	0.125 [3.18]	0.094 [2.38]	2.000 [50.80]	0.438 [11.11]	7.94 [0.313]	A1Z	R1Z	101, 203, 301

TERMINAL FINISH

Terminals are 20 AWG for HLW03 and HLW05 size and 18 AWG for all other sizes. "E" Finish - 100 % Sn, coated Copperweld®. "Z" Finish - 60/40 Sn/Pb coated Copperweld®.

MOUNTING HARDWARE DIMENSIONS in inches [millimeters]

HORIZONTAL THRU-BOLT

DIMENSION	BRACKET TYPE	
	101	
X	1.063 [26.99]	
Y	0.500 [12.70]	
Z	0.859 [21.83]	
H	1.000 [25.40]	
B	1.375 [34.93]	
C	0.750 [19.05]	
MOUNTING SLOT	0.219 x 0.438 [5.56 x 11.11]	

PUSH-IN

DIMENSION	BRACKET TYPE	
	203	204
X	0.625 [15.88]	0.375 [9.53]
H	0.672 [17.07]	0.281 [7.14]
Y	0.250 [6.35]	0.250 [6.35]
Z	0.469 [11.91]	0.344 [8.73]
HOLE (Dia.)	0.161 [4.09]	0.144 [3.66]

VERTICAL THRU-BOLT

DIMENSION	BRACKET TYPE	
	301	
X (Approximate)	0.438 [11.11]	
THREAD	8-32	

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy of nickel-chrome alloy, depending on resistance value


Core: Ceramic, steatite

Coating: Special high temperature silicone

Standard Terminals: Model "Z" terminals are tinned Copperweld®

Terminal Bands: Steel

Part Marking: DALE, model, wattage, value, tolerance, date code

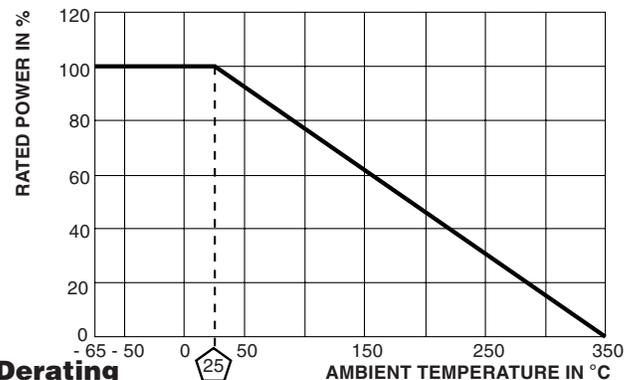



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.