

Micropower Precision Shunt Voltage Reference

FEATURES

- Initial Voltage Accuracy: 0.05%
- Low Operating Current: 10 μ A
- Low Drift: 25ppm/ $^{\circ}$ C Max
- Less Than 1 Ω Dynamic Impedance
- Available in SO-8 and TO-92 Package

APPLICATIONS

- Portable Meters
- Precision Regulators
- A/D and D/A Converters
- Calibrators


DESCRIPTION

The LT[®]1634-2.5 is a micropower, precision shunt voltage reference. The bandgap reference uses trimmed precision thin-film resistors to achieve 0.05% initial voltage accuracy. An improved curvature correction technique guarantees 25ppm/ $^{\circ}$ C maximum temperature drift. Advances in design, processing and packaging techniques guarantee 10 μ A operation and low temperature cycling hysteresis. The LT1634-2.5 does not require an output compensation capacitor, but is stable with capacitive loads. Low dynamic impedance makes the LT1634-2.5 reference easy to use from unregulated supplies.


The LT1634-2.5 reference can be used as a high performance upgrade to the LM185/LM385, LT1004 and LT1034 where higher precision, lower power and guaranteed temperature drift is required. A 1.25V version, LT1634-1.25, is also available.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION



Temperature Drift

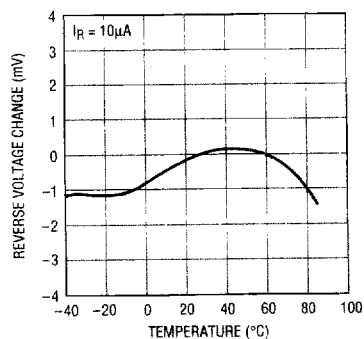

LT1634-2.5

ABSOLUTE MAXIMUM RATINGS

Operating Current	100mA	Operating Temperature Range	
Forward Current	20mA	LT1634BC-2.5	0°C to 70°C
Storage Temperature Range	-65°C to 150°C	LT1634BI-2.5	-40°C to 85°C
Lead Temperature (Soldering, 10 sec).....	300°C		

PACKAGE/ORDER INFORMATION

<p>MS8 PACKAGE 8-LEAD PLASTIC MSOP T_{JMAX} = 125°C, θ_{JA} = 250°C/W</p>	ORDER PART NUMBER	<p>S8 PACKAGE 8-LEAD PLASTIC SO T_{JMAX} = 125°C, θ_{JA} = 190°C/W</p>	ORDER PART NUMBER	<p>Z PACKAGE 3-LEAD PLASTIC TO-92 T_{JMAX} = 125°C, θ_{JA} = 190°C/W</p>	ORDER PART NUMBER
	LT1634BCMS8-2.5		LT1634BCS8-2.5 LT1634BIS8-2.5		LT1634CCZ-2.5
MS8 PART MARKING		S8 PART MARKING			
LTDF		634B2 634BI2			

*Connected internally. Do not connect external circuitry to these pins. Consult factory for Military grade parts.

AVAILABLE OPTIONS

TEMPERATURE	ACCURACY (%)	TEMPERATURE COEFFICIENT (ppm/°C)	PACKAGE TYPE		
			MS8	S8	Z
0°C to 70°C	0.05	25	LT1634BCMS8-2.5	LT1634BCS8-2.5	
-40°C to 85°C	0.05	25		LT1634BIS8-2.5	
0°C to 70°C	0.20	25			LT1634CCZ-2.5

ELECTRICAL CHARACTERISTICS (Note 1)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Reverse Breakdown Voltage	LT1634BCS8/LT1634BIS8/LT1634BCMS8 (I _R = 10μA)	2.49875 -0.05	2.500	2.50125 0.05	V %
	LT1634CCZ (I _R = 10μA)	2.49500 -0.20	2.500	2.50500 0.20	V %
	LT1634BCS8/LT1634BCMS8 (I _R = 10μA)	● 2.49437 -0.225	2.500	2.50562 0.225	V %
	LT1634BIS8 (I _R = 10μA)	● 2.49094 -0.362	2.500	2.50906 0.362	V %
	LT1634CCZ (I _R = 10μA)	● 2.49062 -0.375	2.500	2.50937 0.375	V %
Reverse Breakdown Change with Current	10μA ≤ I _R ≤ 2mA	●	0.30 0.40	1.5 3.0	mV mV
	2mA ≤ I _R ≤ 20mA	●	2 2	8 10	mV mV
Minimum Operating Current		●	4	8	μA
Temperature Coefficient	I _R = 10μA	●	10	25	ppm/°C
Reverse Dynamic Impedance (Note 2)	10μA ≤ I _R ≤ 2mA	●	0.15	0.75	Ω
		●	0.20	1.50	Ω
Low Frequency Noise (Note 3)	I _R = 10μA, 0.1Hz ≤ f ≤ 10Hz	●	20		μV _{p-p}

The ● denotes specifications which apply over the full operating temperature range.


Note 1: ESD (Electrostatic Discharge) sensitive device. Use proper ESD handling precautions.

Note 2: This parameter is guaranteed by "reverse breakdown change with current" test.

Note 3: Peak-to-peak noise is measured with a single highpass filter at 0.1Hz and 2-pole lowpass filter at 10Hz.


TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

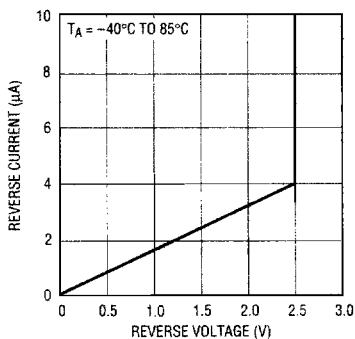


1634-2.5 G61

Temperature Drift

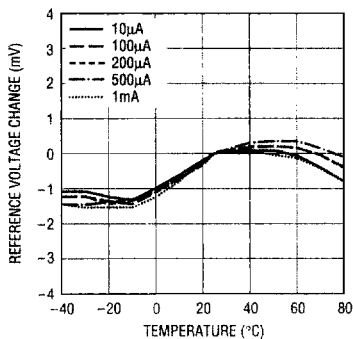


1634-2.5 G62

Reverse Voltage Change vs Current

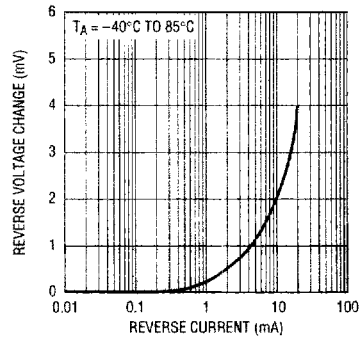


1634-2.5 G63

Reverse Dynamic Impedance

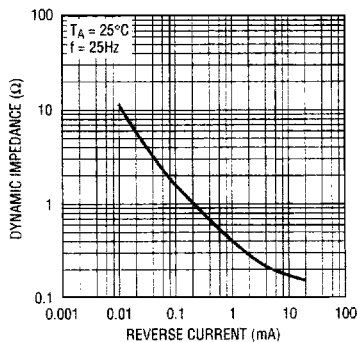


1634-2.5 G64

Dynamic Impedance vs Frequency

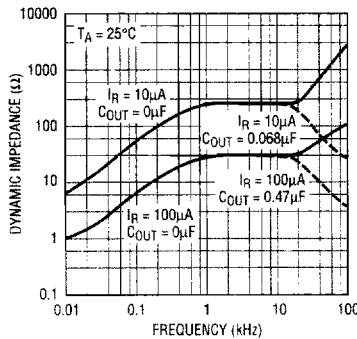


1634-2.5 G65

Forward Characteristics

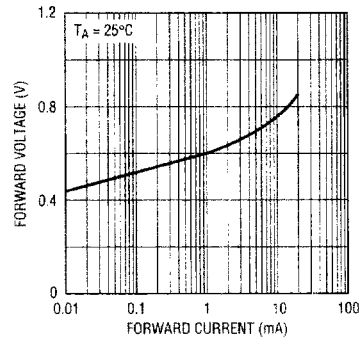


1634-2.5 G66

0.1Hz to 10Hz Noise

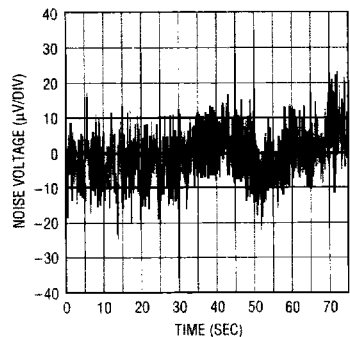


1634-2.5 G67

Response Time



1634-2.5 G68

Response Time




1634-2.5 G69

7

LT1634-2.5

TYPICAL APPLICATION

Reference for Micropower A/D Converter

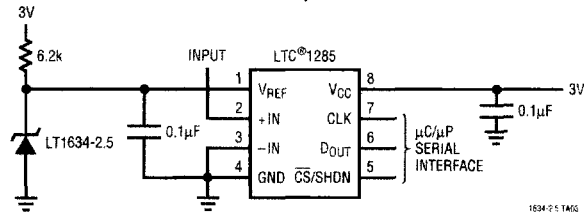

1634-2.5 TA02

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1440	Micropower Comparator with Reference	3.7μA Max Supply Current, 1% 1.182V Reference
LT1460	Micropower Series Reference	0.075% Max, 10ppm/°C Max Drift
LT1495	1.5μA Precision Rail-to-Rail Dual Op Amp	1.5μA Max Supply Current, 100pA Max I _{OS}
LTC1540	Nanopower Comparator with Reference	600nA Max Supply Current, 2% 1.182V Reference