



LM135 LM235 - LM335,A

PRECISION TEMPERATURE SENSORS


- DIRECTLY CALIBRATED IN K
- 1 °C INITIAL ACCURACY
- OPERATES FROM 450µA TO 5mA
- LESS THAN 1Ω DYNAMIC IMPEDANCE

DESCRIPTION

The LM135, LM235, LM335 are precision temperature sensors which can be easily calibrated. They operate as a 2-terminal Zener and the breakdown voltage is directly proportional to the absolute temperature at 10mV/ K.

The circuit has a dynamic impedance of less than 1Ω and operates within a range of current from 450µA to 5mA without alteration of its characteristics.

Calibrated at +25 °C, the LM135, LM235, LM335 have a typical error of less than 1 °C over a 100 °C temperature range. Unlike other sensors, the LM135, LM235, LM335 have a linear output.




ORDER CODE

Part Number	Temperature Range	Package	
		Z	D
LM135	-55 °C, +150 °C	•	•
LM235	-40 °C, +125 °C	•	•
LM335,A	-40 °C, +100 °C	•	•


Z = TO92 Plastic package - also available in Bulk (Z), Tape & Reel (ZT) and Ammo Pack (AP)
D = Small Outline Package (SO) - also available in Tape & Reel (DT)

PIN CONNECTIONS


TO92
(Bottom view)



SO8
(Top view)



SCHEMATIC DIAGRAM

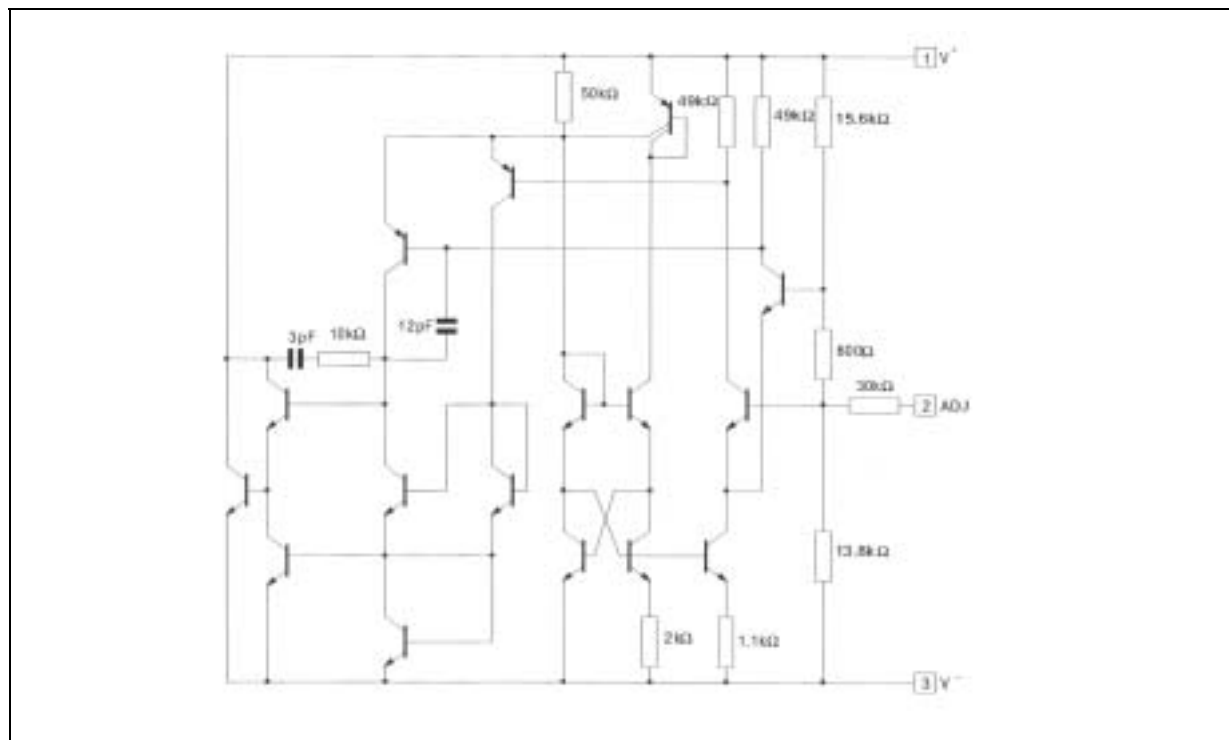

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	LM135	LM235	LM335,A	Unit
I_R I_F	Current Reverse Forward	15 10			mA
T_{oper}	Operating Free-air Temperature Range ¹⁾ Continuous Intermittent	-55 to +150 +150 to +200	-40 to +125 +125 to +150	-40 to +100 +100 to +125	C
T_{Stg}	Storage Temperature Range	-65 to +150			C

1. $T_J \leq 150$ C







TEMPERATURE ACCURACY

Parameter	LM135 - LM235 - LM335A			LM335			Unit
	Min.	Typ.	Max.	Min.	Typ.	Max.	
Operating Output Voltage $T_{\text{case}} = +25\text{ C}, I_R = 1\text{mA}$	2.95	2.98	3.01	2.92	2.98	3.04	V
Uncalibrated Temperature Error ($I_R = 1\text{mA}$) $T_{\text{case}} = +25\text{ C}$ $T_{\text{min.}} \leq T_{\text{case}} \leq T_{\text{max.}}$		1 2	3 5		5 4	6 9	C
Temperature Error with 25 C Calibration $T_{\text{min.}} \leq T_{\text{case}} \leq T_{\text{max.}}, I_R = 1\text{mA}$		0.5	1.5		1	2	C
Calibrated Error at Extended Temperature $T_{\text{case}} = T_{\text{max.}}$ (intermittent)		2			2		C
Non-linearity ($I_R = 1\text{mA}$) LM135 - LM235 LM335 LM335A		0.3 0.3	1 1.5		0.3	1.5	C


ELECTRICAL CHARACTERISTICS - (note 1)

Parameter	LM135 - LM235			LM335,A			Unit
	Min.	Typ.	Max.	Min.	Typ.	Max.	
Operating output voltage change with current $450\mu\text{A} \leq I_R \leq 5\text{mA}$ at constant temperature		2.5	10		3	14	mV
Dynamic Impedance ($I_R = 1\text{mA}$)		0.5			0.6		Ω
Output Voltage Temperature Drift		+10			+10		mV/ C
Time Constant Still Air Air 0.5m/s Stirred Oil		80 10 1			80 10 1		s
Time Stability ($T_{\text{case}} = +125\text{ C}$)		0.2			0.2		C/kh


1. Accuracy measurements are made in a well-stirred oil bath. For other conditions, self heating must be considered

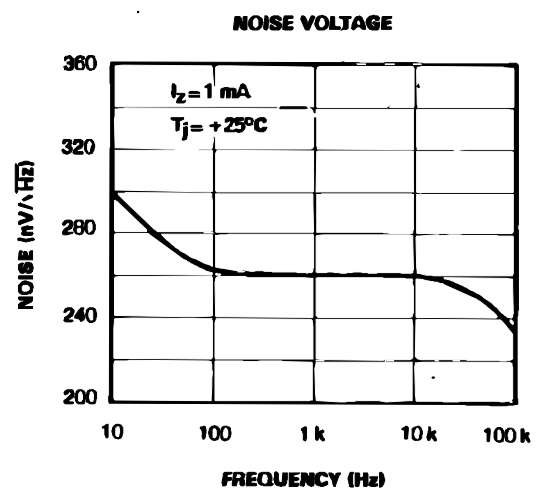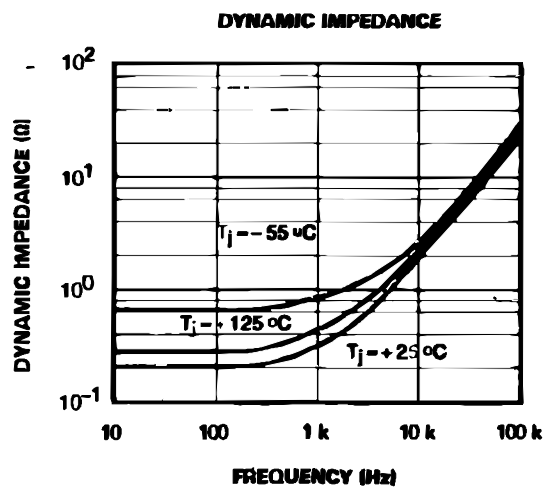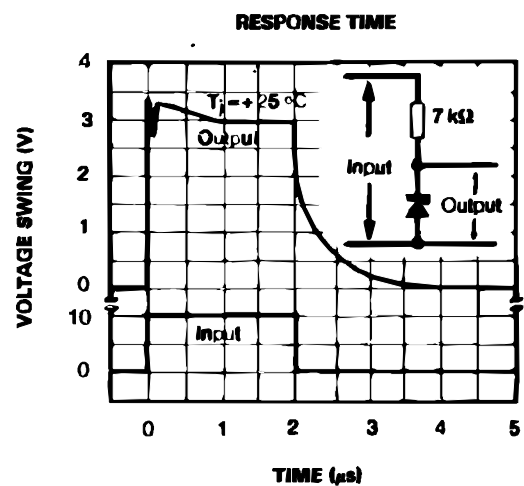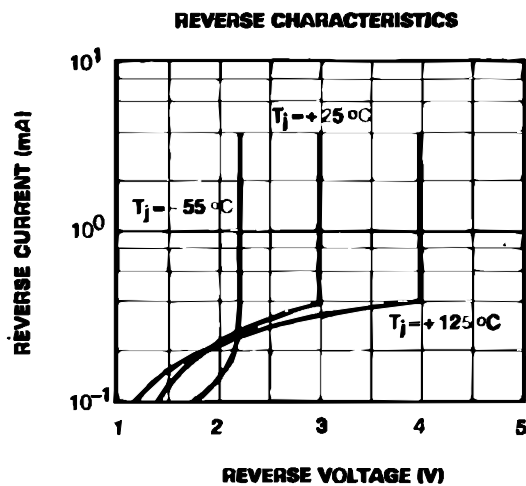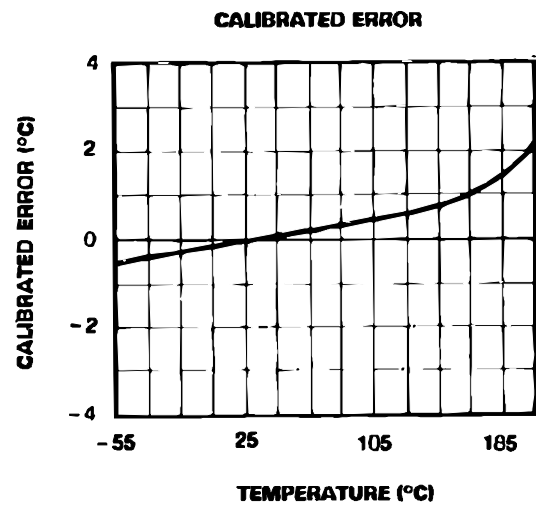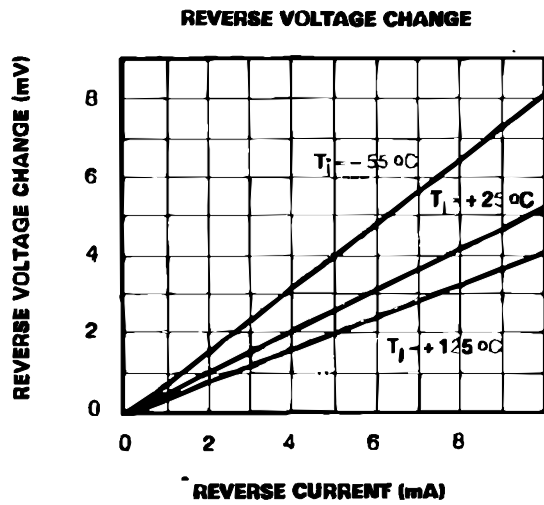


THERMAL RESISTANCE JUNCTION TO AIR

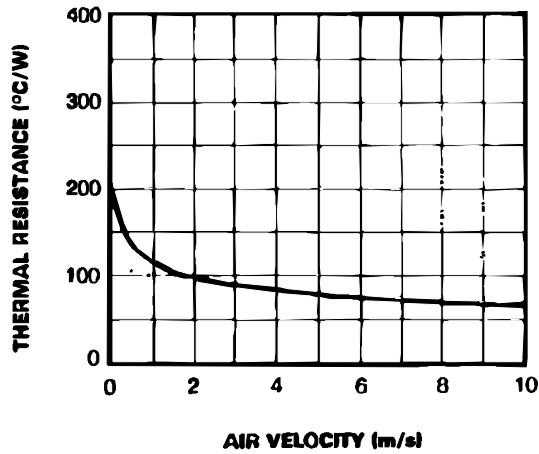


THERMAL TIME CONSTANT

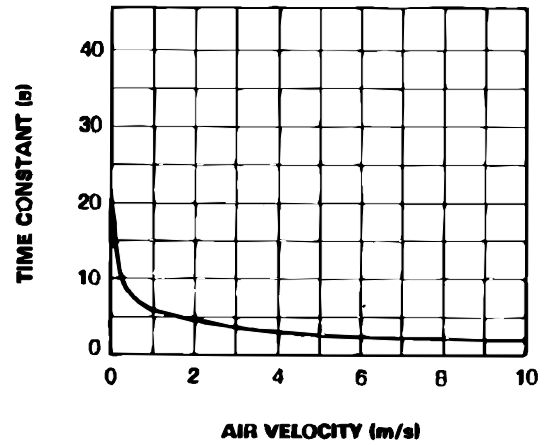


THERMAL RESPONSE IN STILL AIR

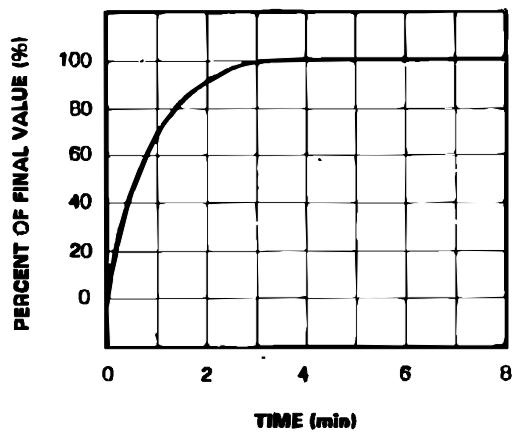

THERMAL RESPONSE IN STIRRED OIL BATH

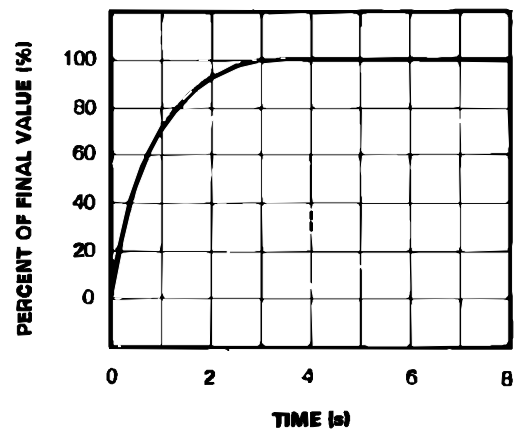

FORWARD CHARACTERISTICS

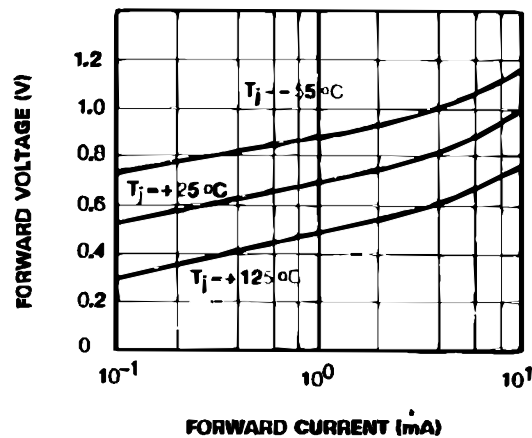

APPLICATION HINTS

There is an easy method of calibrating the device for higher accuracies (see typical applications).

The single point calibration works because the output of the LM135, LM235, LM335 is proportional to the absolute temperature with the extrapolated output of sensor going to 0V at 0 K (-273.15 C). Errors in output voltage versus temperature are only slope. Thus a calibration of the slope at one temperature corrects errors at all temperatures.

The circuit output (calibrated or not) can be given by the equation: $V_{OT} + V_{OTO} \times \frac{T}{T_0}$

where T is the unknown temperature and T₀ is the reference temperature (in K).


Nominally the output is calibrated at 10mV/ K.

Precautions should be taken to ensure good sensing accuracy. As in the case of all temperatures sensors, self heating can decrease accuracy. The LM135, LM235, LM335 should operate with a low current but sufficient to drive the sensor and its calibration circuit to their maximum operating temperature.


If the sensor is used in surroundings where the thermal resistance is constant, the errors due to self heating can be externally calibrated. This is possible if the circuit is biased with a temperature stable current. Heating will then be proportional to zener voltage and therefore temperature. In this way the error due to self heating is proportional to the absolute temperature as scale factor errors.

TYPICAL APPLICATIONS


BASIC TEMPERATURE SENSOR

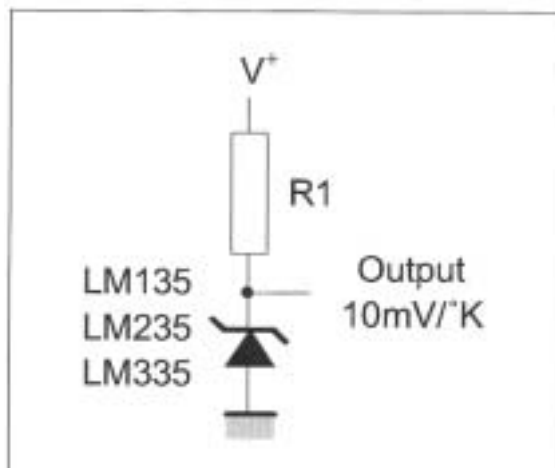


WIDE OPERATING SUPPLY

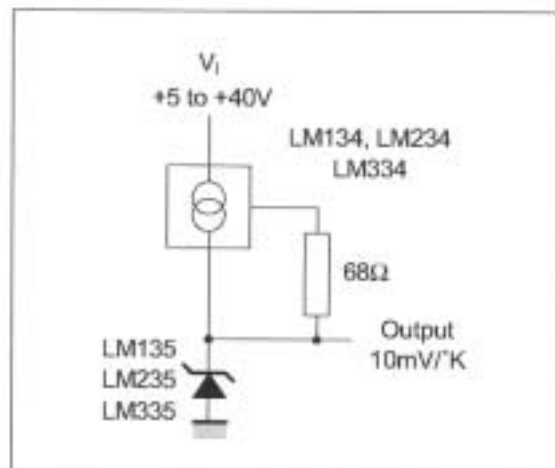


CALIBRATED SENSOR

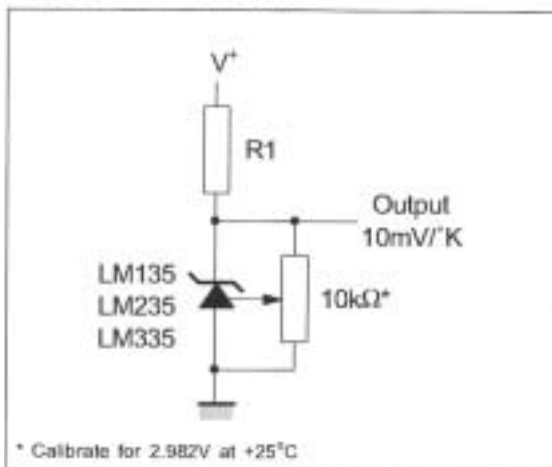


AVERAGE TEMPERATURE SENSING

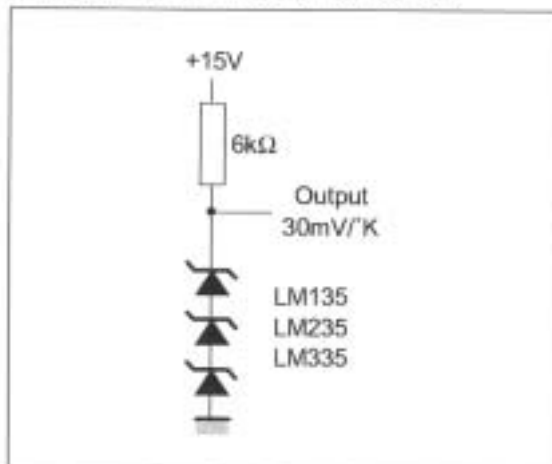


ISOLATED TEMPERATURE SENSOR

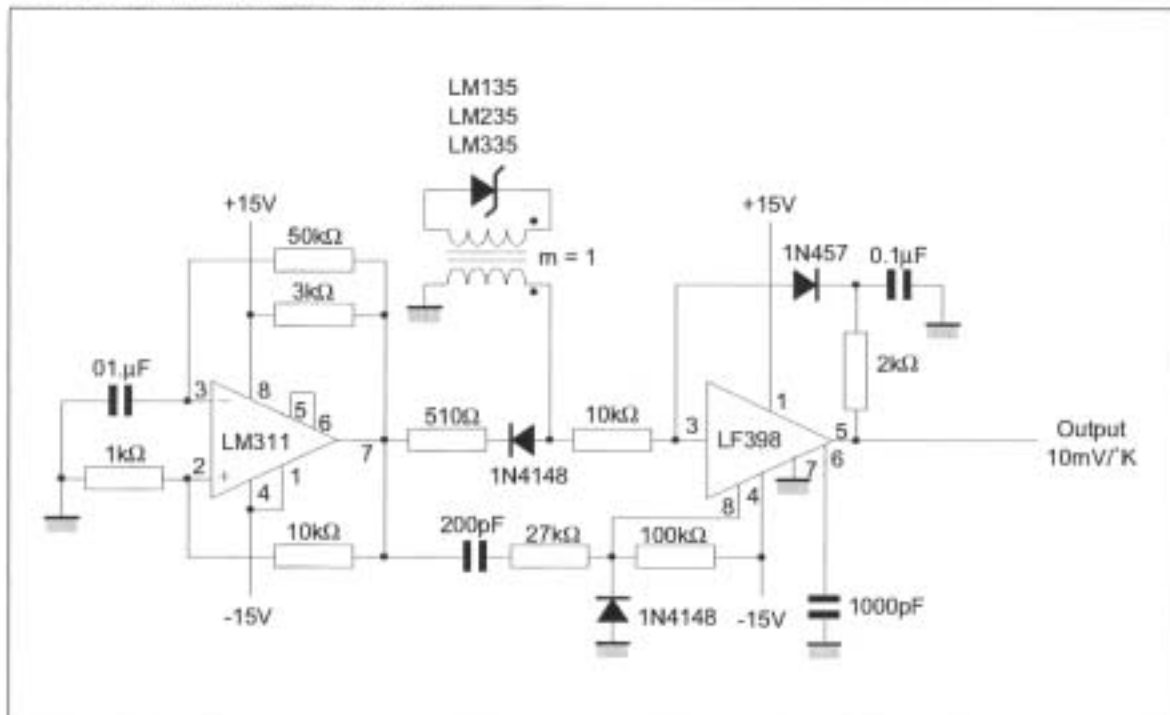


SIMPLE TEMPERATURE CONTROLLER

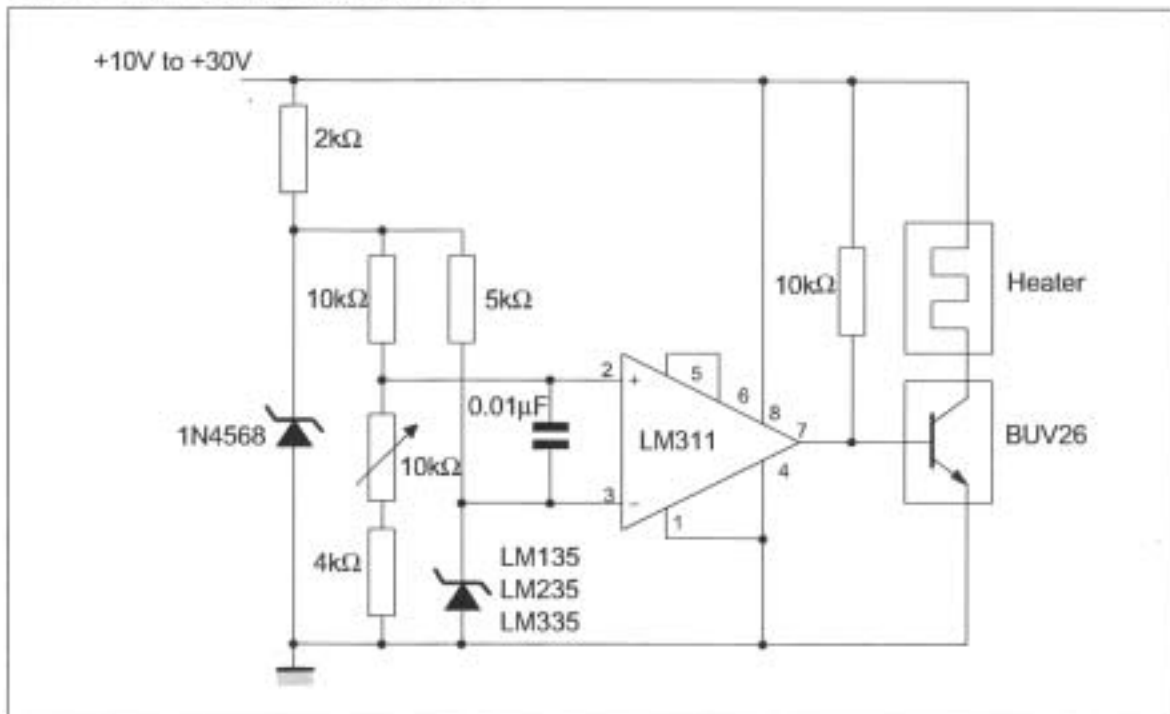


CENTIGRADE THERMOMETER

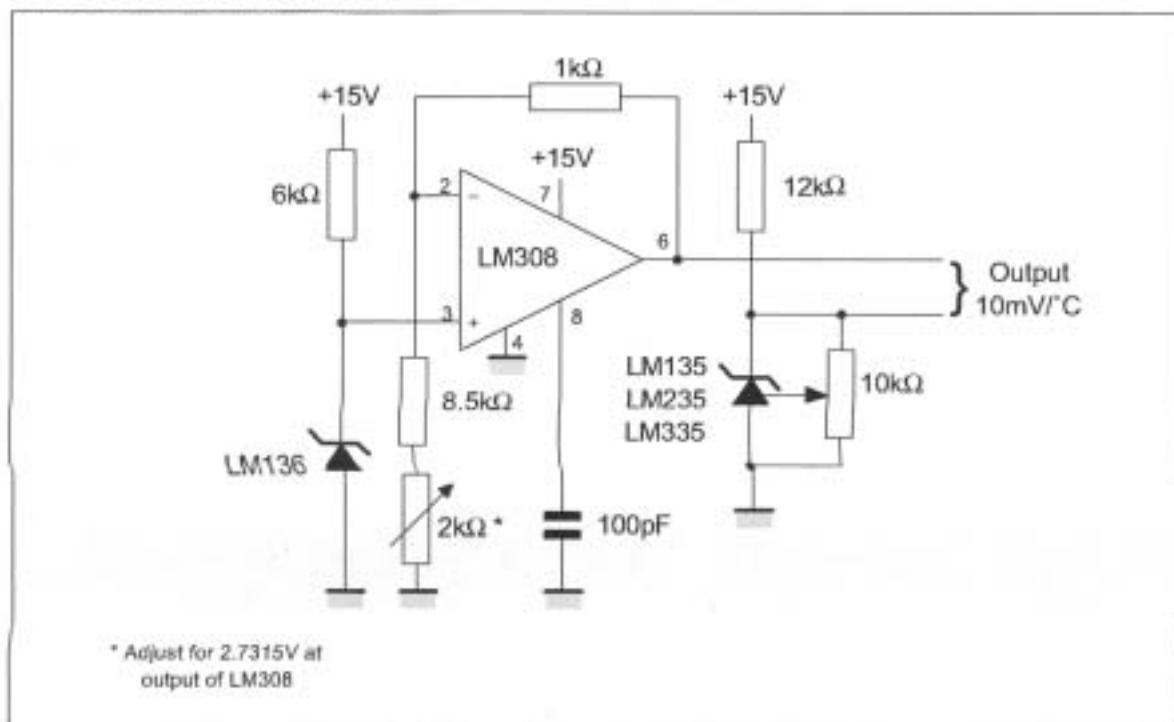


DIFFERENTIAL TEMPERATURE SENSOR

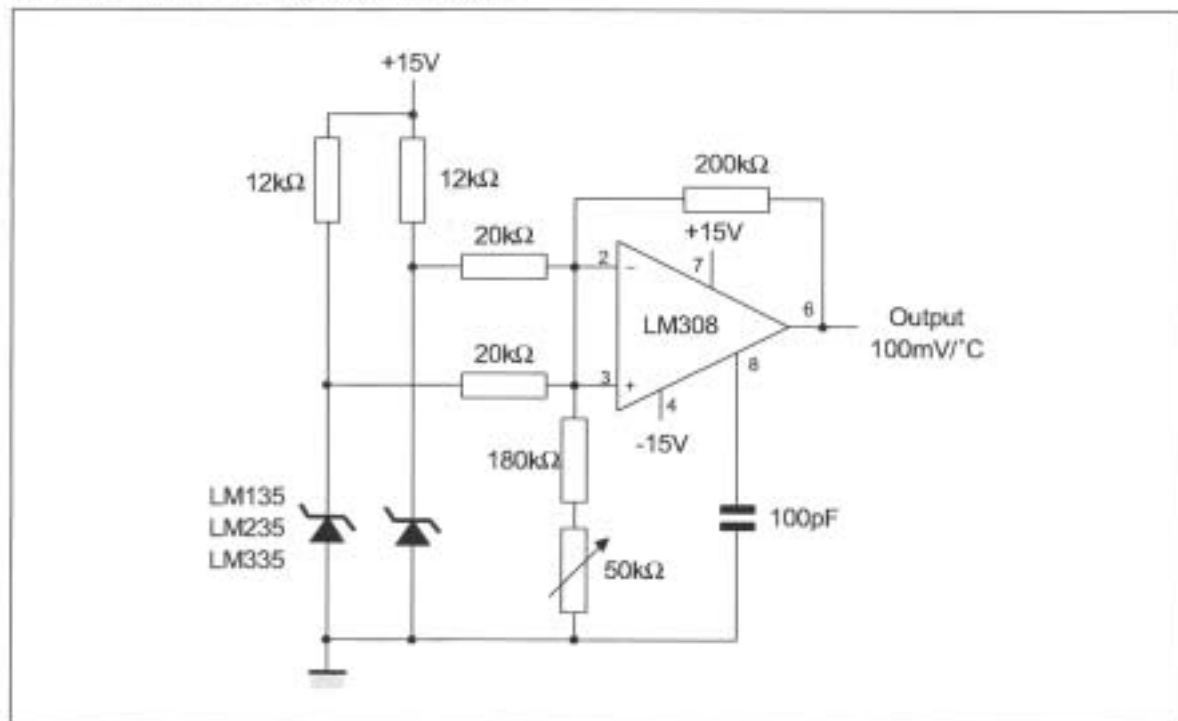

THERMOCOUPLE COLD JUNCTION COMPENSATION (compensation for grounded thermocouple)

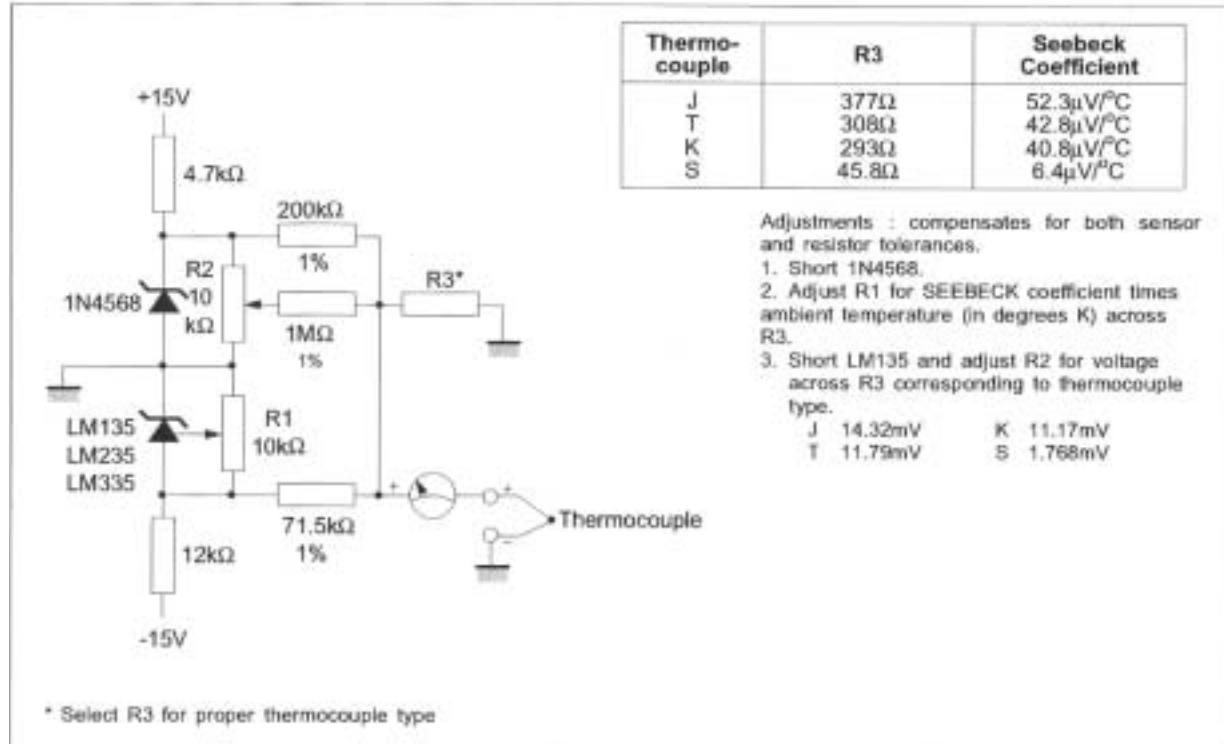


SINGLE POWER SUPPLY COLD JUNCTION COMPENSATION

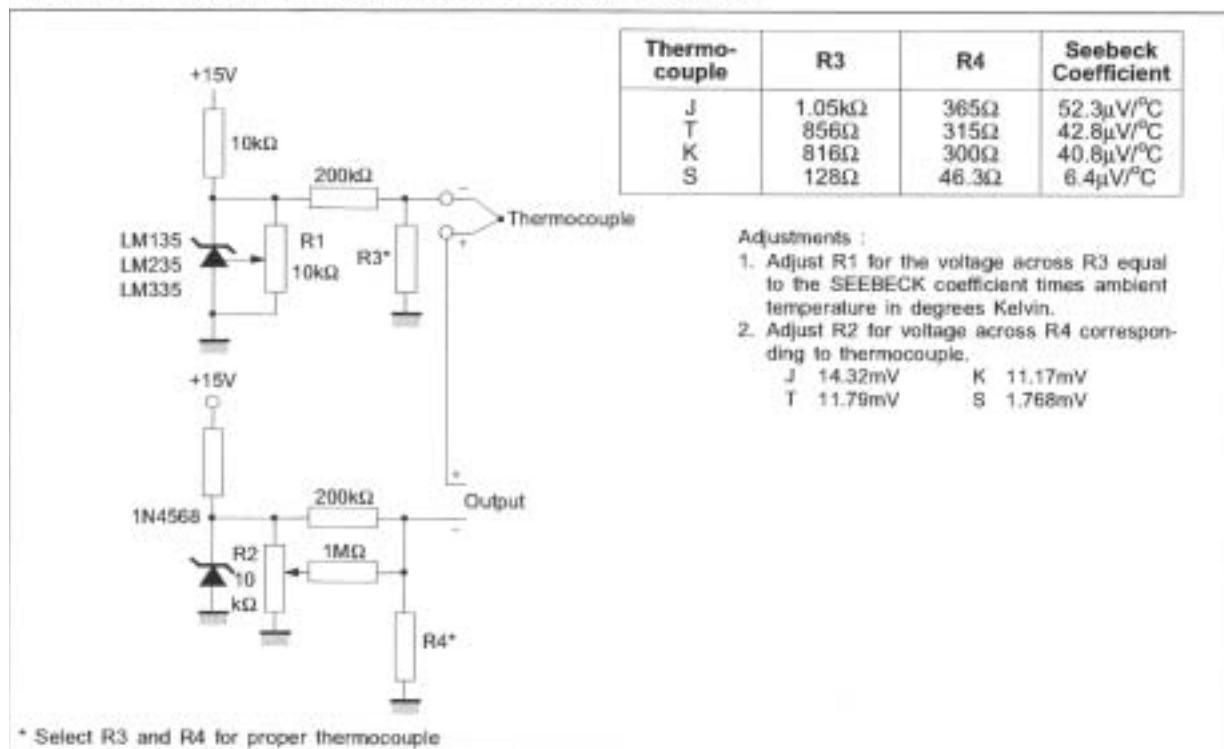

PACKAGE MECHANICAL DATA


62 0 (&+\$1,&\$/ ' \$7\$						
'0	PP			LQK		
	0,1	7<3	0\$;	0,1	7<3	0\$;
\$						
\$						
\$						
%						
&						
'						
(						
H						
+						
K						
/						
N	> P D					
GGG						

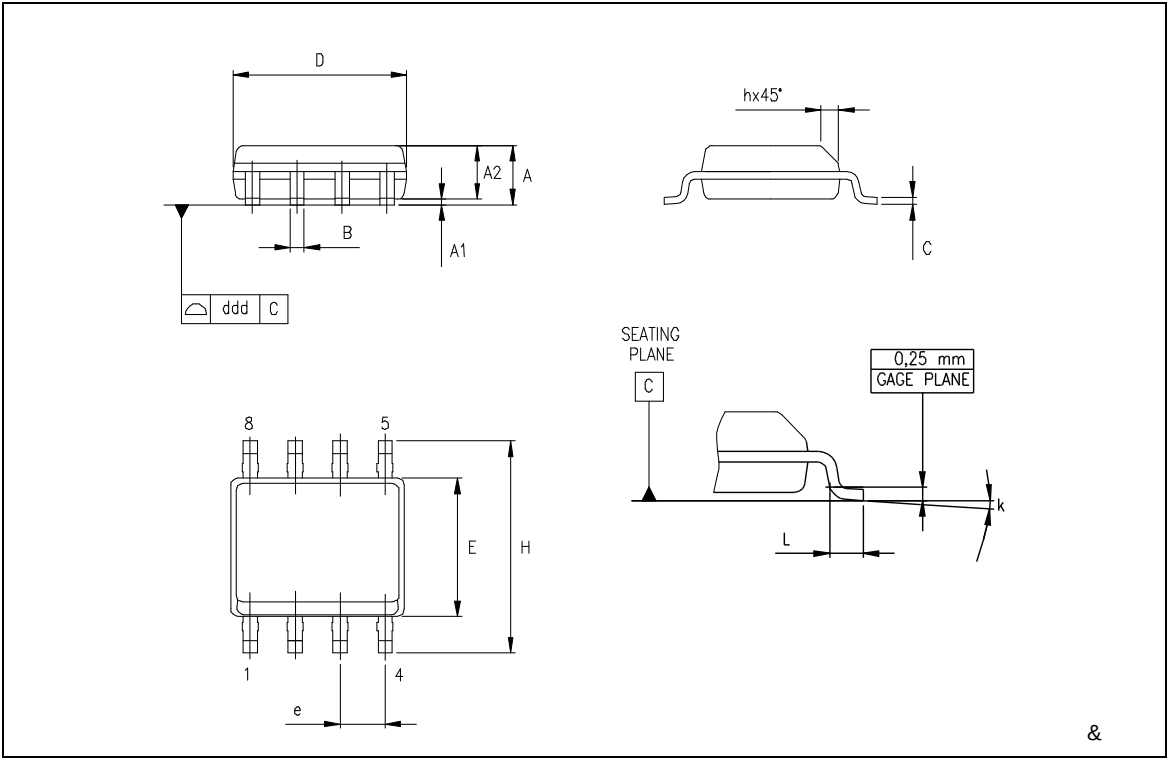

PACKAGE MECHANICAL DATA - TO92 TAPE AMMO PACK & TO92 TAPE & REEL

TO-92 MECHANICAL DATA

DIM.	mm.			inches		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
AL			5.0			0.197
A			5.0			0.197
T			4.0			0.157
d		0.45			0.018	
l1	2.5			0.098		
P	11.7	12.7	13.7	0.461	0.500	0.539
PO	12.4	12.7	13	0.488	0.500	0.512
P2	5.95	6.35	6.75	0.234	0.250	0.266
F1/F2	2.4	2.5	2.8	0.094	0.098	0.110
h	-1	0	1	-0.039	0	0.039
P	-1	0	1	-0.039	0	0.039
W	17.5	18.0	19.0	0.689	0.709	0.748
W0	5.7	6	6.3	0.224	0.236	0.248
W1	8.5	9	9.75	0.335	0.354	0.384
W2			0.5			0.020
H			20			0.787
H0	15.5	16	16.5	0.610	0.630	0.650
H1			25			0.984
DO	3.8	4.0	4.2	0.150	0.157	0.165
L1			11			0.433

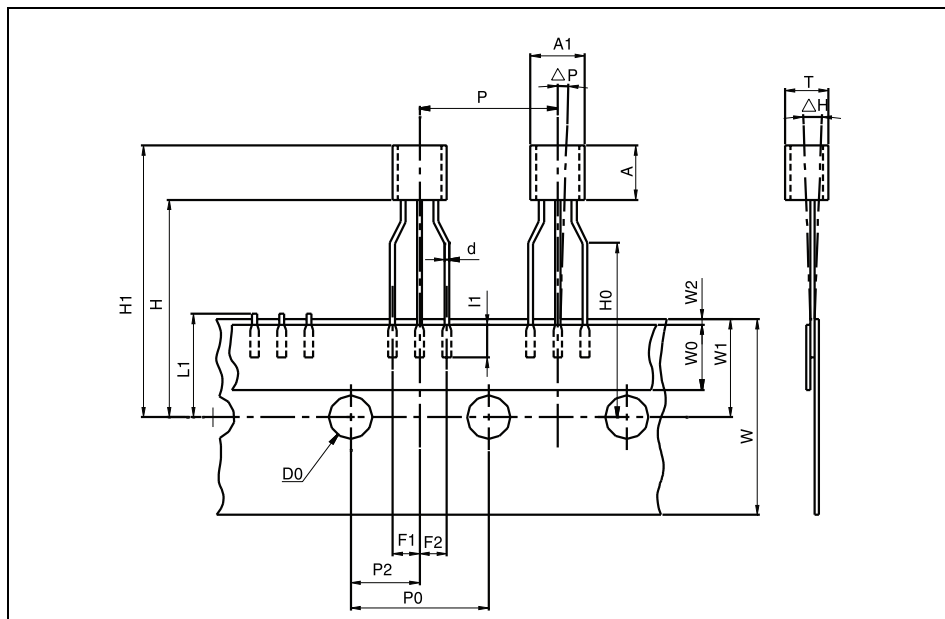

Packing information are available at: <http://www.st.com/stonline/prodpres/packages/stdlin.htm>

PACKAGE MECHANICAL DATA - TO92 BULK

72 0(&+\$1,& '\$\$7\$						
'0	PP			PLØ		
	0,1	7<3	0\$;	0,1	7<3	0\$;
\$						
E						
,						
(						
H						
H						
/						
5						
6						
:						

Packing information are available at: <http://www.st.com/stonline/prodpres/packages/stdlin.htm>

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2004 STMicroelectronics - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco

Singapore - Spain - Sweden - Switzerland - United Kingdom

<http://www.st.com>